

ALPHA LIFE GENERAL TRADING CO.W.L.L,



2026

PRODUCT CATALOGUE



Alpha life General trading co.w.l.l,

We are a leading pharmaceutical and disposable distributing company that offers a comprehensive range of disposable healthcare and medical products.

We bring the latest advancements in medical technology to our clients thereby contributing to the betterment of the healthcare sector and beyond.

Over the last two decades we have earned a reputation for excellence through unwavering dedication to high-quality products and services as a market-leading healthcare company.

- ✓ Respiratory Division
- ✓ CSSD (Central Sterile Services Department)
- ✓ Pharmaceutical Division
- ✓ Medical Consumables



150+

PRODUCTS

40K

HAPPY CUSTOMERS

22+ YEARS

EXPERIENCE



PRODUCT CATALOGUE

01 Personal Protection

02 breathing system

03 Gastrointestinal system

04 Blood system

05 Urology system

06 Drainage system

07 Puncture system

08 Dressing system

Examine system 09

Surgical Instruments 10

Equipment 11

Accessories 12

Home medical system 13

■ Round nurse cap

- Material : PP/PE/SMS
- Gram: 9g/m²-150g/m²
- Color : blue, white, green, yellow, pink, red
- Size : 18 ", 19 ", 20 ", 21 ", 24 ", etc
- Packing : 100pcs/bag, 1000pcs/carton



■ Clip cap

- Material : PP non woven
- Weight : 9g/m²-150g/m²
- Color : blue, white, green, yellow, pink, red
- Size : 18 ", 19 ", 20 ", 21 ", 24 ", etc
- Packing : 100pcs/bag, 1000pcs/carton



■ DOUBLE ELASTIC

■ SINGLE ELASTIC



Doctor cap with elastic



Doctor cap with ties



Invisible hair net



Nylon hair net



Shower cap



Snood cap



Space cap with ties



Astro cap with face mask



Masks Earloop

- Material : PP non woven+ meltblown non woven
- Gram: 20g/m²+20g/m²+25g/m²
- Color : white , blue , green , yellow , pink
- Size : 17.5*9.5cm,14.5*9cm,12.5*9cm,12*7cm
- Packing : 50pcs/box, 40boxes/ctn



Masks Earloop

- Material : PP non woven+ meltblown non woven
- Gram: 20g/m²+20g/m²+25g/m²
- Color : white , blue , green , yellow , pink
- Size : 17.5*9.5cm,14.5*9cm,12.5*9cm,12*7cm
- Packing : 50pcs/box, 40boxes/ctn

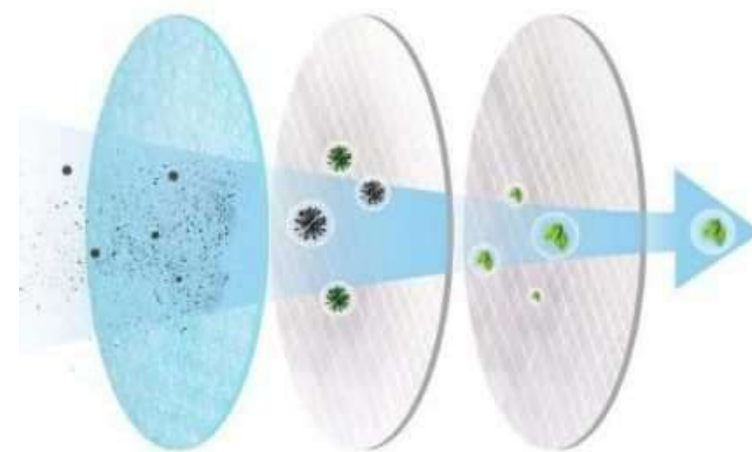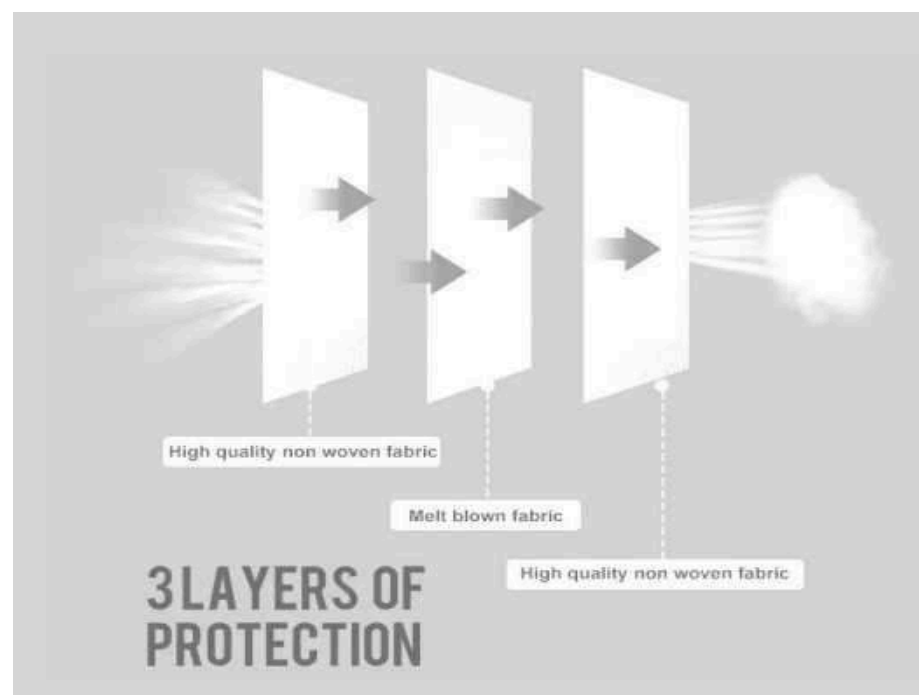

Mask with print



Adult



children

N95 Mask



Folding type



With breather valve



Cup type



Fish type



Kn95 Mask

Visor Shield Mask



Reusable Mask



Self-suction filtering



Electric air supply



Silica gel

Other Mask



washable



FFP2



Noish

Medical Protective Full-Face Mask

- The surface: smooth, waterproof, non-toxic and soft
- Full face protection: anti-splash, good sealing and less pressure injury of air cushion seal
- Easy replacement of filter device



Medical Positive Pressure Protective Coverall

- The first in China
- Full body protection
- Continuous positive pressure, fresh air circulation
- Not easy to sweat, safe and comfortable
- Cost-effective>>The filter device can be replaced



Configuration	Size	Cat. No.
With air Supply Device	170	PP11170
	175	PP11175
Without air Supply Device	170	PP10070
	175	PP10075

Face Shield

Adult



children



Medical Protective Full-Face Mask



- Ventilation valve can be adjusted by switch
- Double anti-fog treatment , better anti-fog effect

Surgical Gown & coverall



- Material : PP / PP+PE / SMS
- Gram: 15gsm-65gsm
- Color : blue, white, green, yellow
- Size : S/M/L/XL/XXL/XXXL
- Packing : 10pcs/bag, 100pcs/carton



Dustproof ventilation




waterproof ventilation



Wear tear resistant



u PP

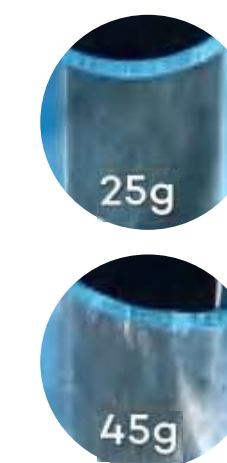


u PP+PE




u SMS

collar

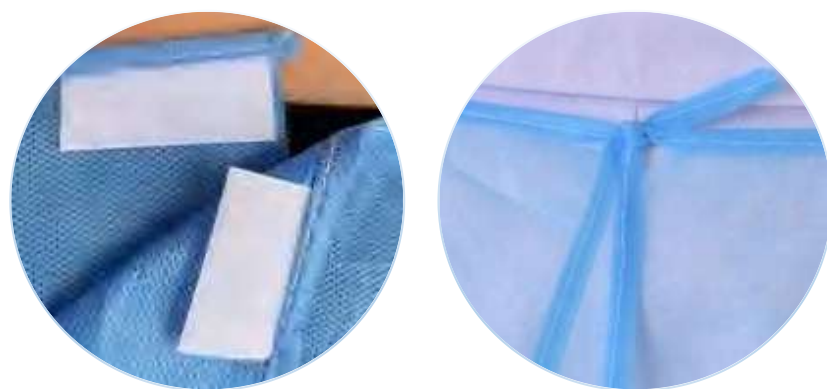


belt

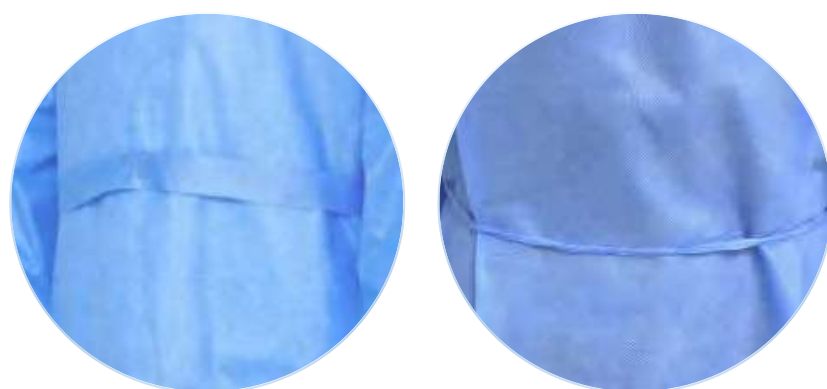

cuff



seam

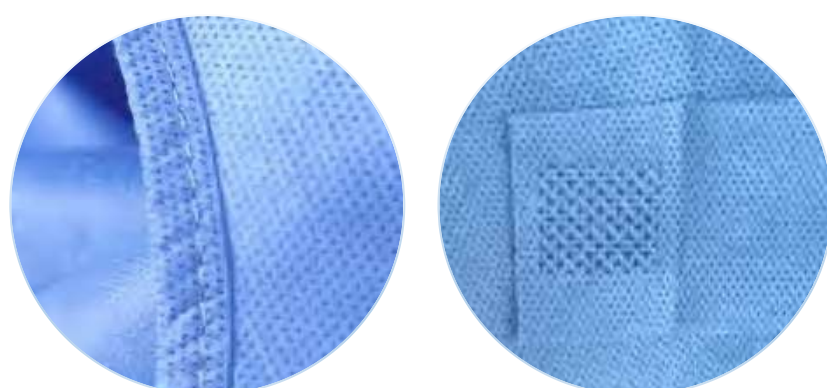

Short sleeve



Enhanced gown



LAB GOWN



Button




Zipper



Overall gown

- Material : PP /PP+PE/SMS
- Weight : 35gsm-60gsm
- Color : blue, white, green, yellow, pink, red
- Size : 18 ", 19 ", 20 ", 21 ", 24 ", etc
- Packing : 100pcs/bag, 1000pcs/carton

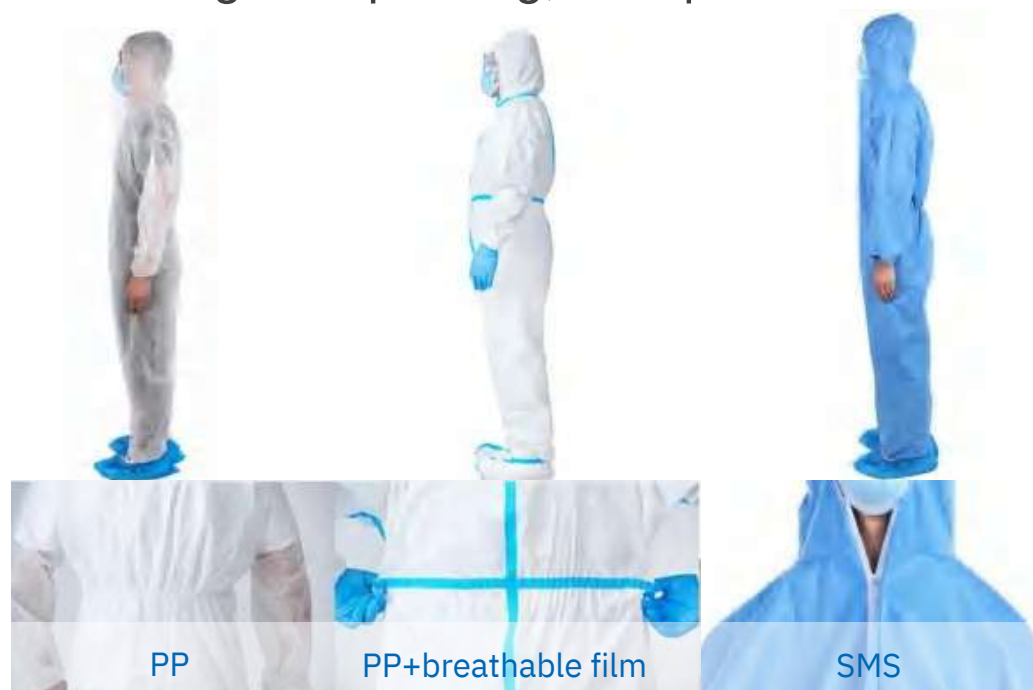

Isolation Gowns




Blue Gown



Thumb loop



Yellow Gown

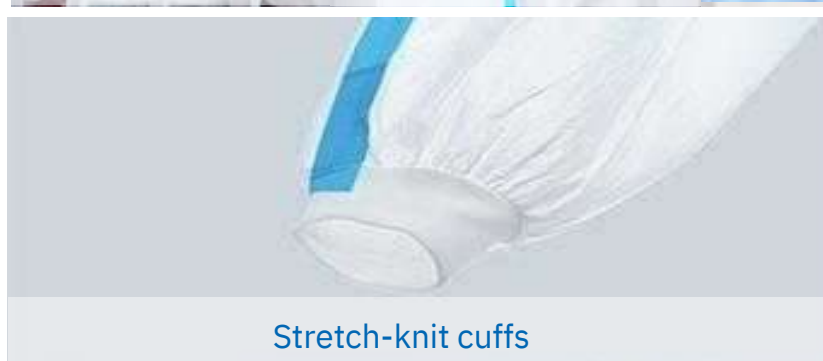


Stretch-knit cuffs




Elastics cuffs



zipper

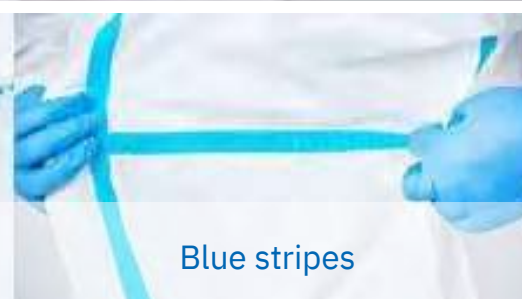


Blue stripes

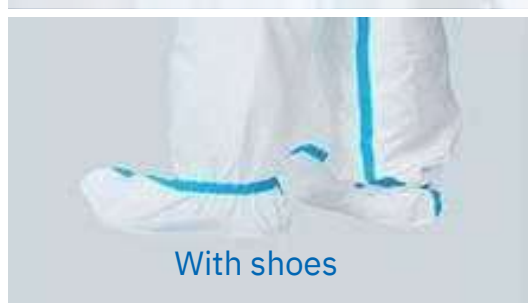


With shoes



Without shoes

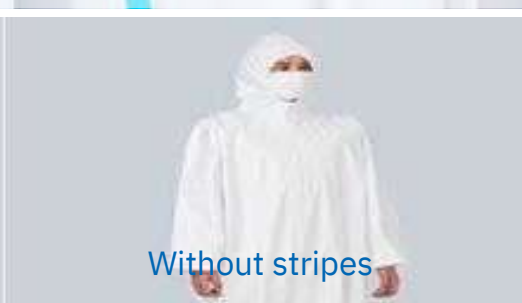


Without stripes

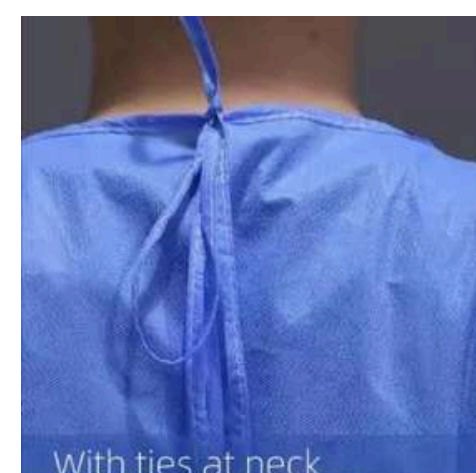

With ties at neck



With knitted cuffs

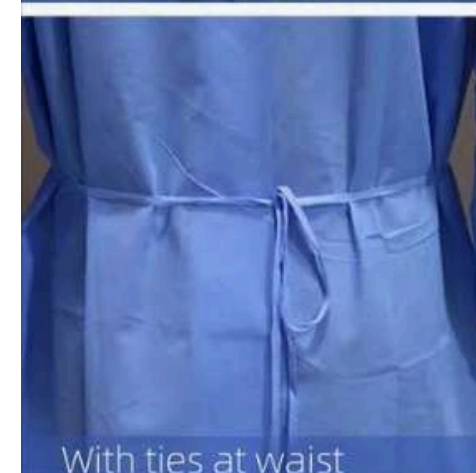

With ties at waist



Breathable and liquid proof




Transparent Film Dressing



Ref No.	Product Name
TO-10 CM	Tegaderm 9x10cm
To-15CM	Tegaderm 9x15cm
To-25CM	Tegaderm 9x25cm
To-7CM	Tegaderm 5x 7cm
TO-IV-6CM	Tegaderm IV 6cmx7cm
TO-IV-10CM	Tegaderm IV 10cmx12cm

Item No	Description	Pack
1001U	1-3/4"x1-3/4" (4.4cmx4.4cm)	1x40x100

Application: for fixing I.V. Especially for infants and premature babies, and for fixing butterfly and drug kettle catheter

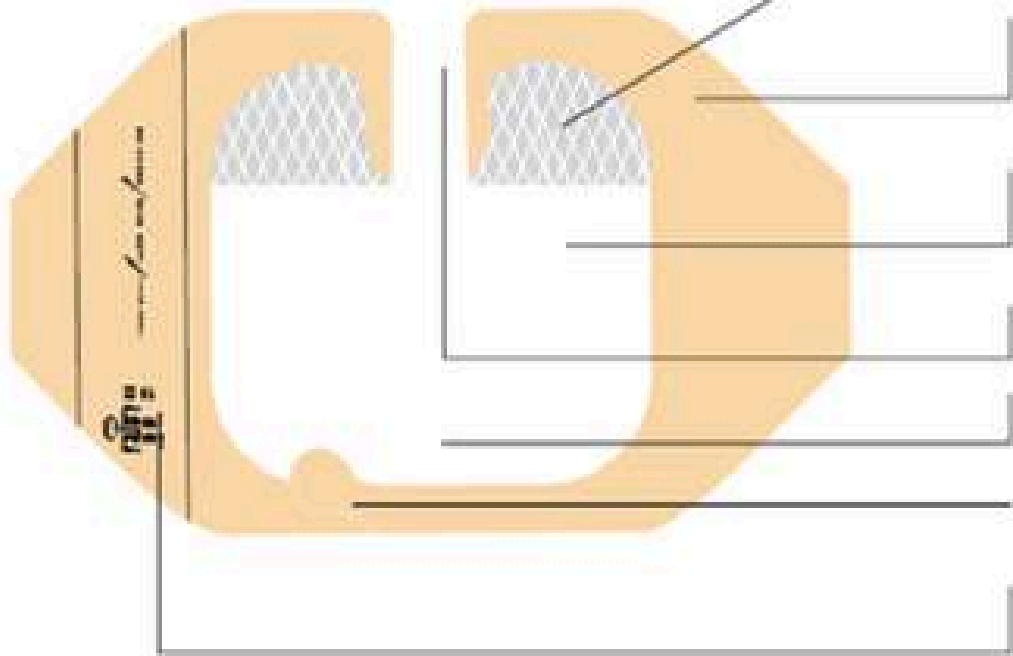

At the "U" cut area, the spunlace nonwoven fabric is laminated, to prevent the wrinkle of the film when using, make it more smooth and safer.
U形切口加水刺无纺布使用更安全、平整，不皱褶、不粘结。

CCK frame style decreases extra tension on skin, prevent the skin hurt.
框型设计，防止操作时在皮肤上产生张力，降低皮肤受损的机会。

PU film is breathable and transparent, and it is convenient to observe the injection point or the wound healing process.
聚氨酯(PU)薄膜完全透明和透气，方便观察注射部位及伤口情况。

"U"cut is convenient for fixing I.V. cannula with butterfly or drug kettle.
独特的U形切口设计，方便于蝶翼型或带加药壶留置针的固定。

Extra-thin design is comfortable to the skin.
超薄设计，可完全顺服的贴在皮肤上。

Special tab design could make the paper frame easier to peel off.
特殊的耳形设计使纸框剥离更便捷。


The recorder tape is convenient for recording patient's name, date and Bed No., reinforcing fixing and easy for management.
附加记录及固定用的透气胶带，方便操作者记录患者姓名、时间与床号，并可加强固定，便于品质管理。

Product Description

1. High permeable polyurethane film (PU): 20-40g/m², thickness 0.015-0.030mm.
2. MVTR of PU with flat coating: 1800g/m²/24h/37°C.
3. MVTR of PU with grid-coating: 3100g/m²/24h/37°C.
4. Hypoallergenic acrylic adhesive: 25-37g/m².
5. CCK paper, PE or PET protective film.
6. Transparency.
7. Silicon coated paper.

Application

1. Fixing I. V catheter, PICC and CVC etc.
2. Fixing anaesthesia catheter, pulmonary artery catheter, hemodialysis catheter, kidney dialysis and PCA cannula etc.
3. Apply for friction skin or wet skin, such as skin care after trachea incision, care for torus of bone, skin care when gatism, bedsore precaution etc.
4. Apply for slight bruise, cut, suturing wounds, etc.
5. As a secondary fixation.

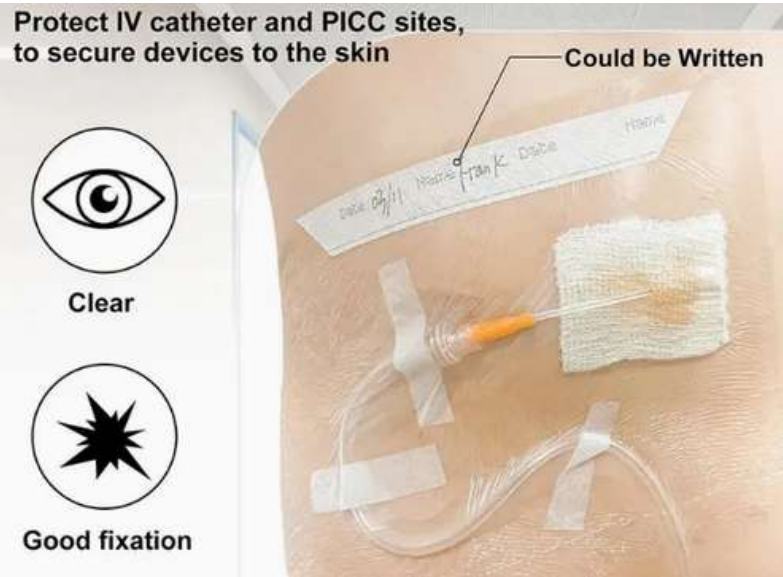

Arm sleeve

- Thickness: 0.02mm/0.018mm
- Color : blue, white, green
- Size: 20*40cm, 22*40cm, 22*46cm
- Packing : 100pcs/bag, 2000pcs/carton



Non-woven



PE



CPE



SF

Shoes cover

- weight : 3gsm/4gsm/5gsm etc
- Color : blue, white, pink
- Size: 25-45.
- Packing : 100pcs/bag, 2000pcs/carton



Non-woven



Non-slip



PE



cpe



PP+CPE



SF



PE

Sheet cover


- Material : SS/SMS/PP+PE
- Color : blue, white, pink, purple
- Size: 40*50, 50*60, 80*120, 80*150, 100*200, 120*200, etc



other



Pillow case

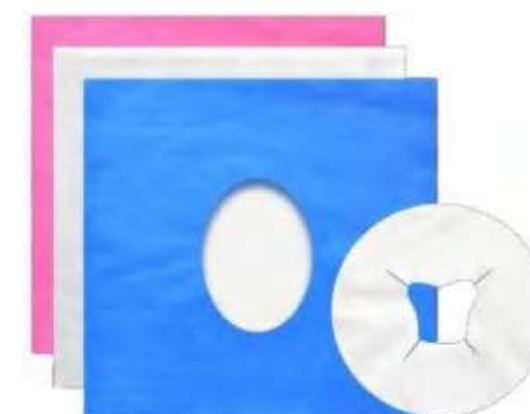

Drape




Quilt cover

■ Alcohol pad (70%)


Material : non woven & IPA

-
- Packaging: 100pcs/box 100boxes/ctn

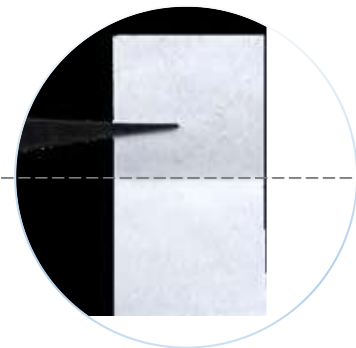

■ Alcohol pad (75%)

- Material : non woven & ethly alcohol
- Packaging: 100pcs/box 100boxes/ctn

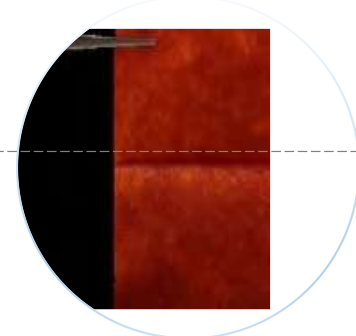

■ Povidone-iodine pad

- Material : non woven & Povidone-iodine
- Packaging: 100pcs/box 100boxes/ctn



Packing size	5*5cm	6.2*7cm	6.2*7cm	7.5*10cm
Tissue size	6*3cm 2ply	6*6cm 4ply	9*4.2cm 2ply	15*20cm 8ply



Alcohol+CHG pad



BZK pad



Alcohol pad



Soap pad



Adhesive remover pad



Saline pad



Sting relief pad



Make-up remover pad



Lens cleaning pad



Skin Barrier pad



Nail polish remover pad

Vinyl Gloves (Powdered / Powder Free)



- Size:xs(palm width 75+/-5mm)
S(palm width 85+/-5mm),
m(palm width 95+/-5mm),
l(palm width 105+/-5mm),
xl(palm width 115+/-5mm);
- Length:230mm(9inches);
- Standard: AQL4.0, aql2.5, aql1.5;
- Features: ambidextrous, beaded cuff;
- Color: natural white, blue, green, black;

Stretchy Vinyl Gloves (Powdered / Powder Free)



- Size:xs(palm width 75+/-5mm)
S(palm width 85+/-5mm),
m(palm width 95+/-5mm),
l(palm width 105+/-5mm),
xl(palm width 115+/-5mm);
- Length:230mm(9inches);
- Standard: AQL4.0, aql2.5, aql1.5;
- Elongation at break: ≥300%;
- Color: natural white, blue;

Nitrile Gloves (Powdered / Powder Free)



- Size:s(palm Width 85+/-5mm),
m(palm Width 95+/-5mm),
l(palm Width 105+/-5mm),
xl(palm Width 115+/-5mm);
- Length: 230mm(9inches),
240mm(9.5inches);
- Standard: AQL4.0, Aql2.5, Aql1.5;
- Features: Ambidextrous, Beaded Cuff,
- Textured Palm And Fingers;
- Color: Blue, Black, White;

Latex Examination Gloves (Powdered / Powder Free)



- Size:s(palm width 85+/-5mm),
m(palm width 95+/-5mm),
l(palm width 105+/-5mm),
xl(palm width 115+/-5mm);
- Length:>230mm(9inches);
- Standard: AQL2.5,
- Features: ambidextrous, beaded cuff;
- Color: natural white;

Latex Surgical Gloves (Powdered / Powder Free)



- Size: 6#, 6.5#, 7#, 7.5#, 8#, 8.5#, 9#;
- Length: 265-290mm(10.5-11.5inches);
- Standard: AQL1.5(medical grade);
- Sterilization by: gamma, ETO;
- Features: beaded cuff,
- Textured palm and fingers;
- Color: natural white;

PE Gloves (LDPE / HDPE)



- Size: S, M, L, XL;
- Thickness: 0.015-0.035mm;
- Features: ambidextrous, embossed;
- Color: clear, blue;



Anesthesia Circuits



Coaxial Circuits



Duo Limbo Circuits



Breathing Circuits




Non-invasive Circuits



Circuit Accessories


■ Corrugated Circuits

- Good elasticity, flexibility and air tightness
- Can be sold as kit with anesthesia mask, breathing bag, HMEF, catheter mount, extra limb
- ISO standard interface

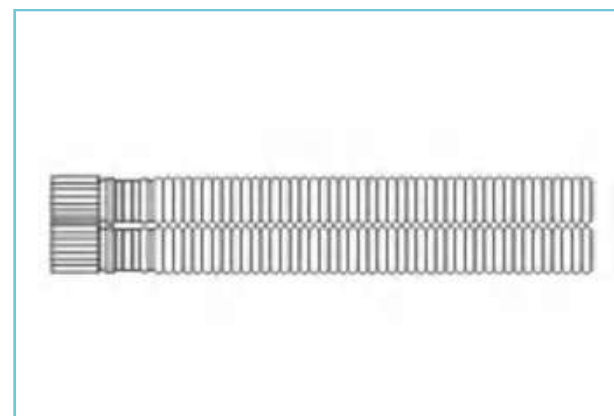


■ Extendable Circuits

- Lightweight, save storage space
- Low airflow resistance, good compliance
- High compression rate, adjustable length
- Can be sold as kit with anesthesia mask, breathing bag, HMEF, catheter mount, extra limb
- ISO standard interface

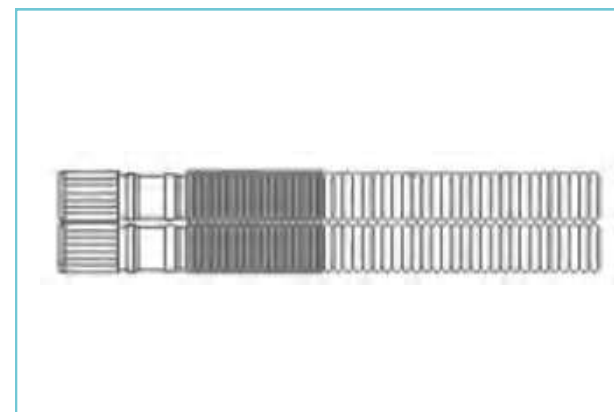


■ Smoothbore Circuits

- Smooth inner wall, water is not easy to accumulate, improve safety
- Unique spiral tube body design to prevent occlusion due to twisting
- Can be sold as kit with anesthesia mask, breathing bag, HMEF, catheter mount, extra limb
- ISO standard interface

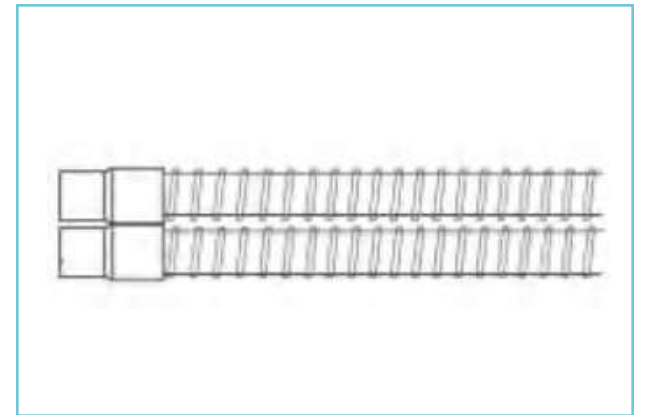


■ Anesthesia Circuit

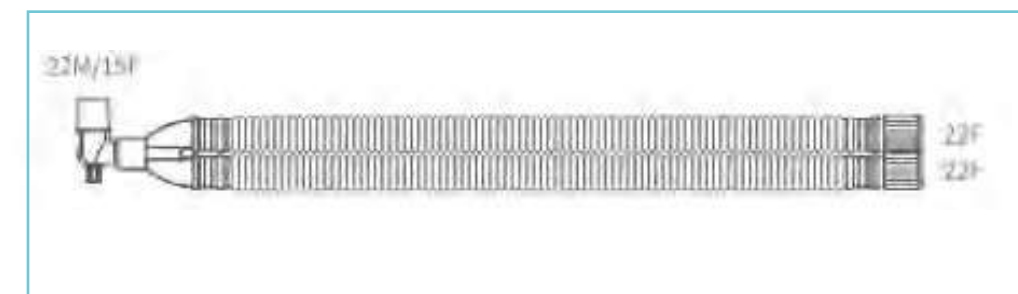


Corrugated	
Length	NO.
1.2m	B0001
1.5m	B0002
1.8m	B0003
2.0m	B0823

■ Anesthesia Circuit, Anesthesia mask

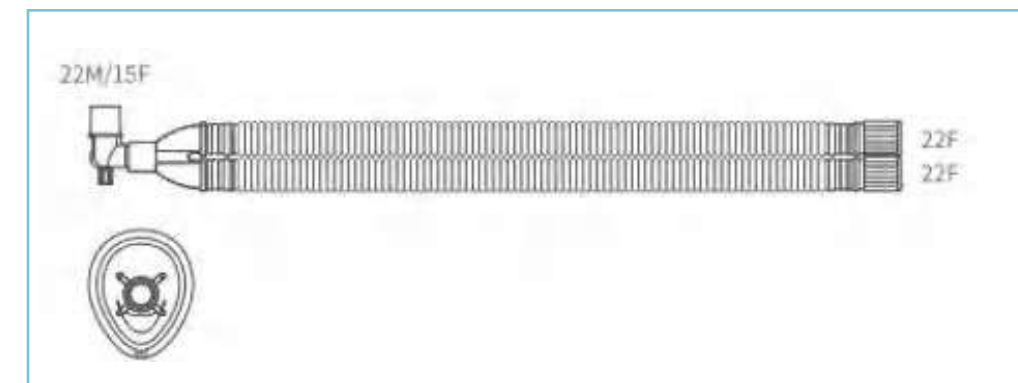


Corrugated	
Length	NO.
1.2m	B0041
1.5m	B0042
1.8m	B0043

■ Anesthesia Circuit, Anesthesia mask, Breathing bag

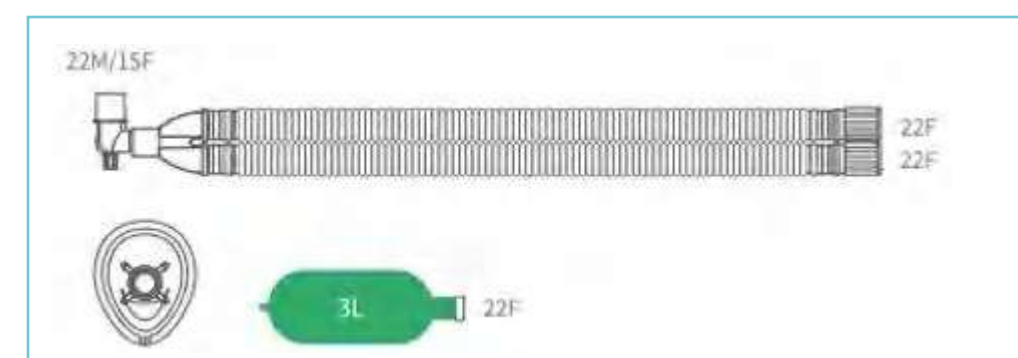


Corrugated	
Length	NO.
1.2m	B0041
1.5m	B0042
1.8m	B0043

Anesthesia circuit, Breathing bag

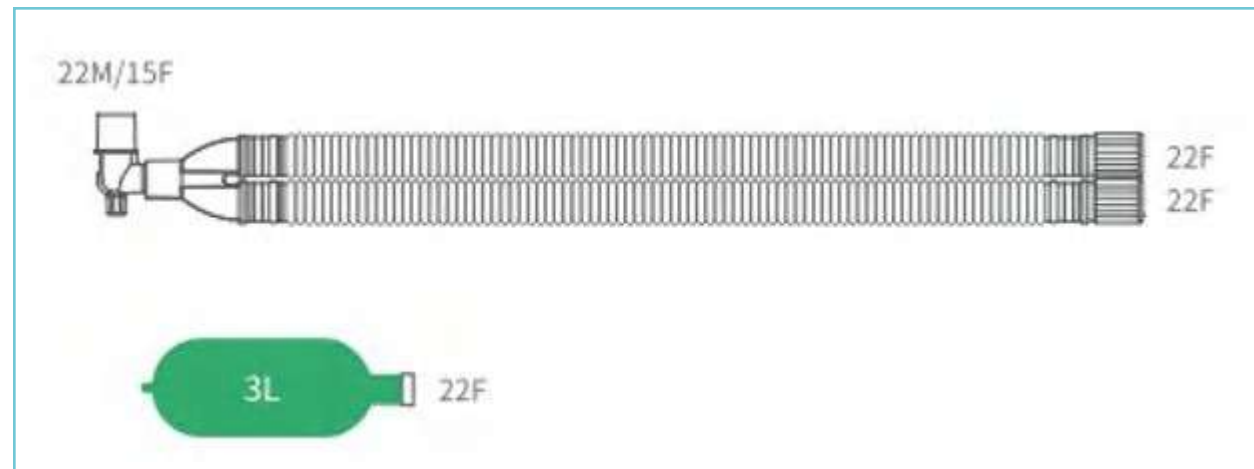


Corrugated	
Length	NO.
1.2m	B0017
1.5m	B0018
1.8m	B0019
2.0m	B0020

Anesthesia Circuit (Extendible)

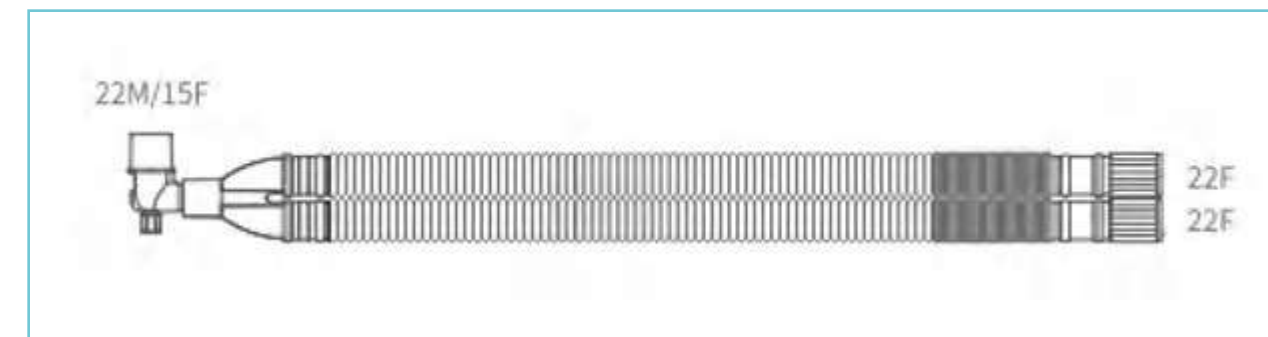


Extendible	
Length	NO.
1.2m	B0275
1.5m	B0276
1.8m	B0277
2.0m	B0278

Anesthesia circuit, Breathing bag, HMEF

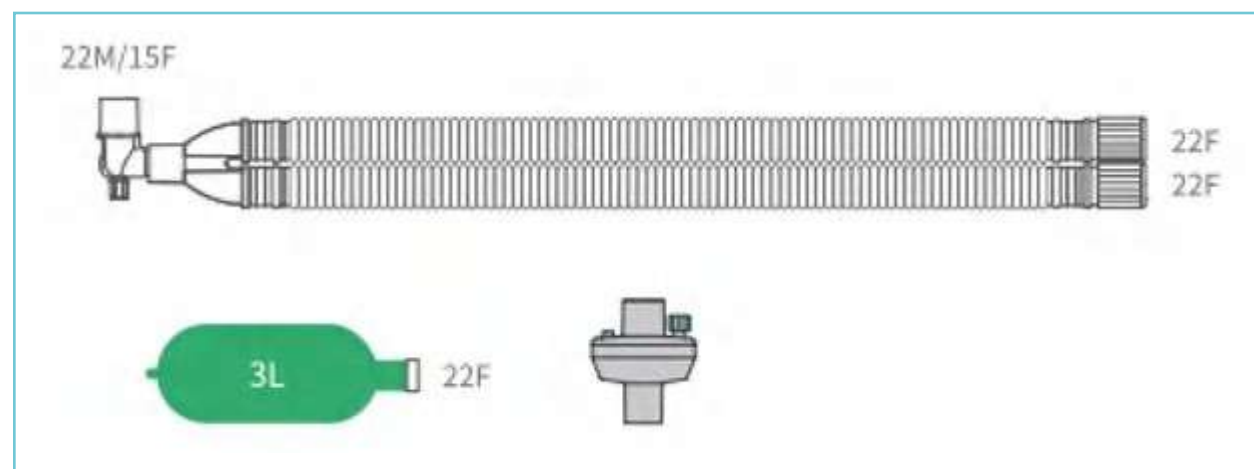


Corrugated	
Length	NO.
1.2m	B0021
1.5m	B0022
1.8m	B0023

Anesthesia Circuit, Anesthesia mask

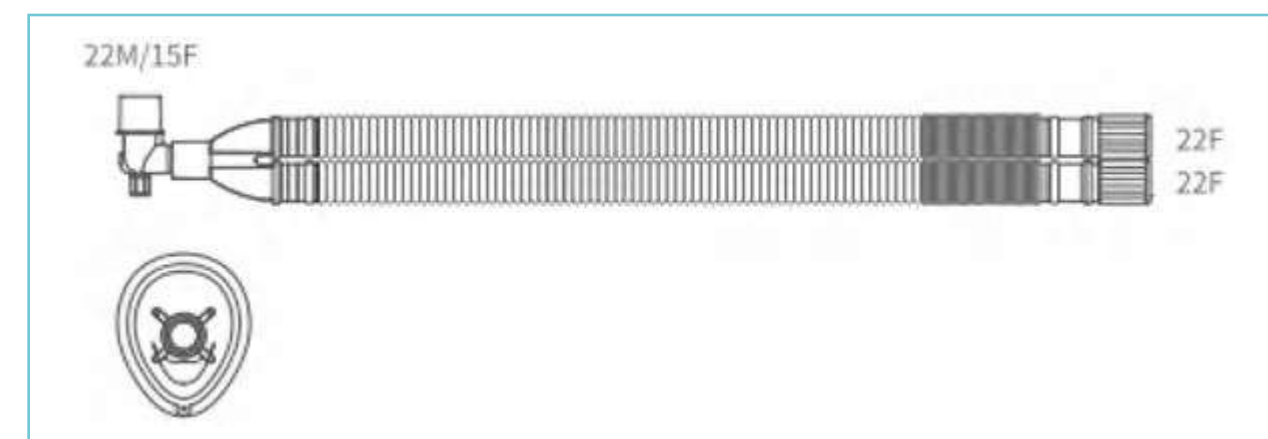


Extendible	
Length	NO.
1.2m	B0315
1.5m	B0316
1.8m	B0317

Anesthesia Circuit, Breathing bag HMEF, Anesthesia mask

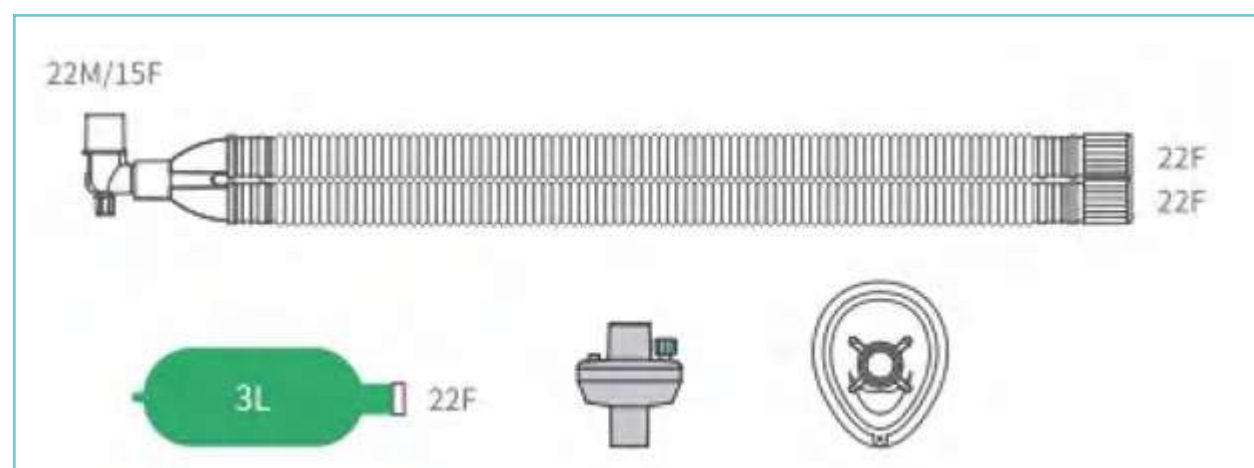


Corrugated	
Length	NO.
1.2m	B0188
1.5m	B0189
1.8m	B0190

Anesthesia Circuit, Anesthesia mask, Breathing bag

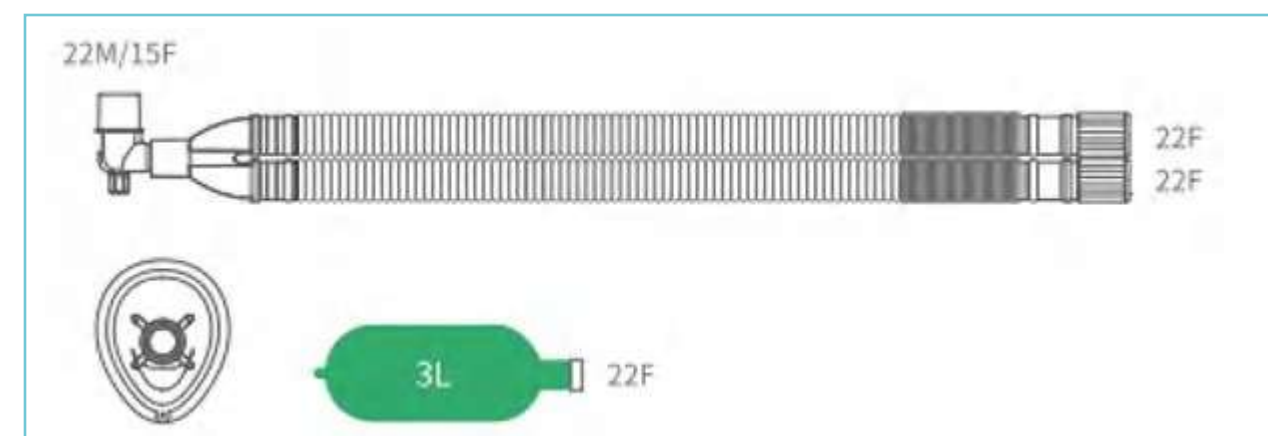


Extendible	
Length	NO.
1.2m	B0366
1.5m	B0367
1.8m	B0368

■ Anesthesia Circuit (Smoothbore)

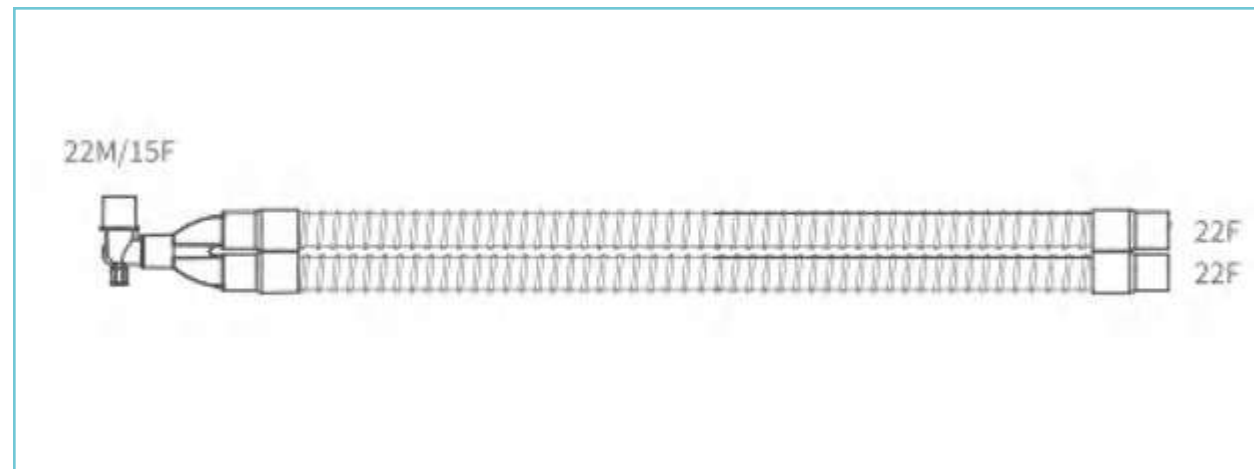


Smoothbore	
Length	NO.
1.2m	B0549
1.5m	B0550
1.8m	B0551
2.0m	B0552

■ Anesthesia circuit, Breathing bag

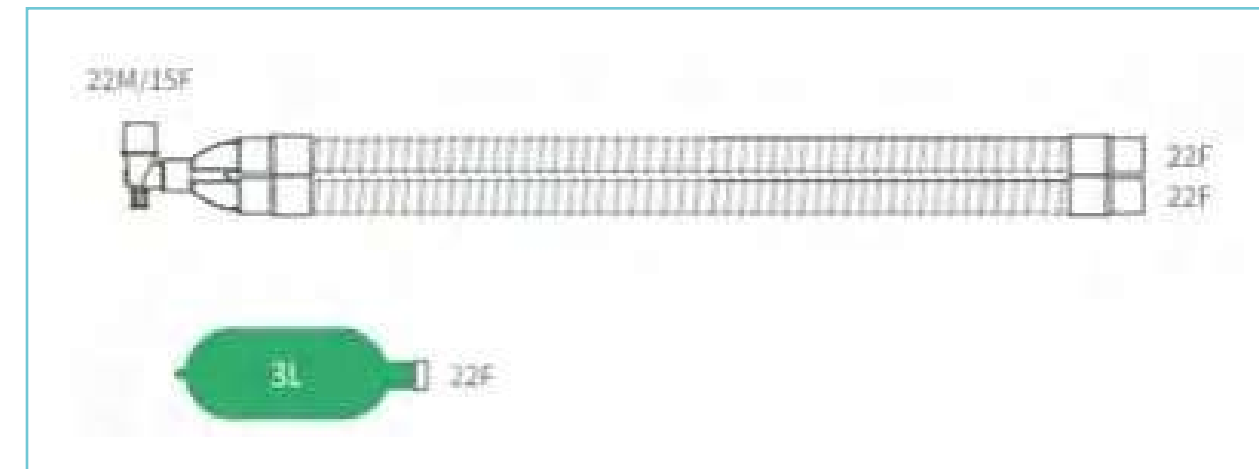


Smoothbore	
Length	NO.
1.2m	B0549
1.5m	B0550
1.8m	B0551
2.0m	B0552

■ Anesthesia Circuit, Anesthesia mask

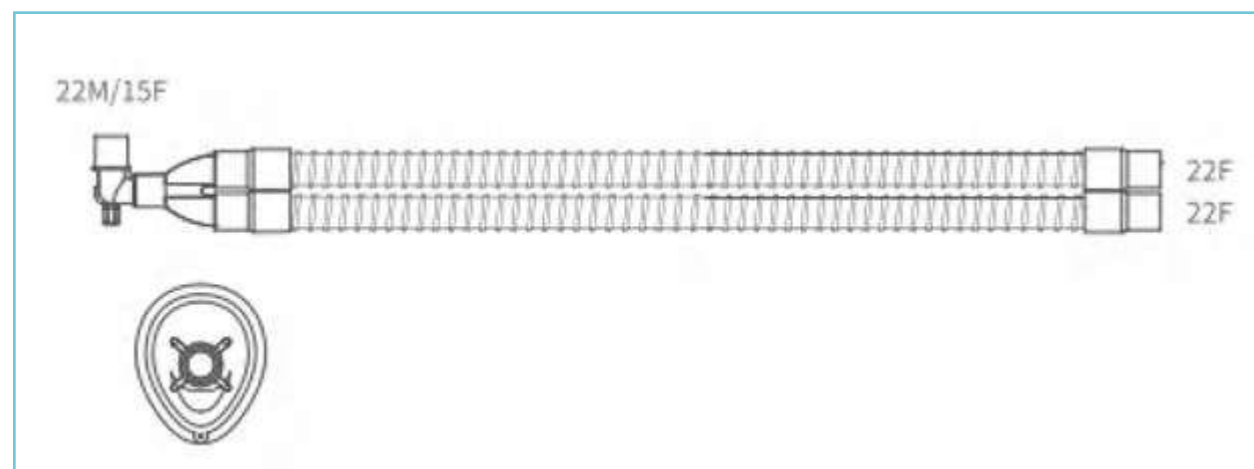


Smoothbore	
Length	NO.
1.2m	B0589
1.5m	B0590
1.8m	B0591

■ Anesthesia circuit, Breathing bag, HMEF

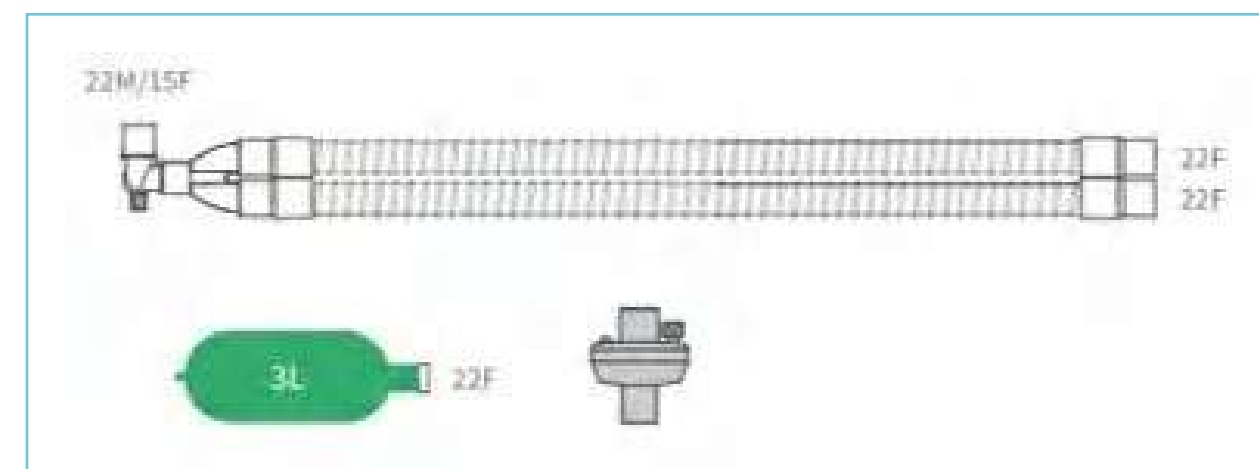


Smoothbore	
Length	NO.
1.2m	B0688
1.5m	B0689
1.8m	B0690

■ Anesthesia Circuit, Anesthesia mask, Breathing bag

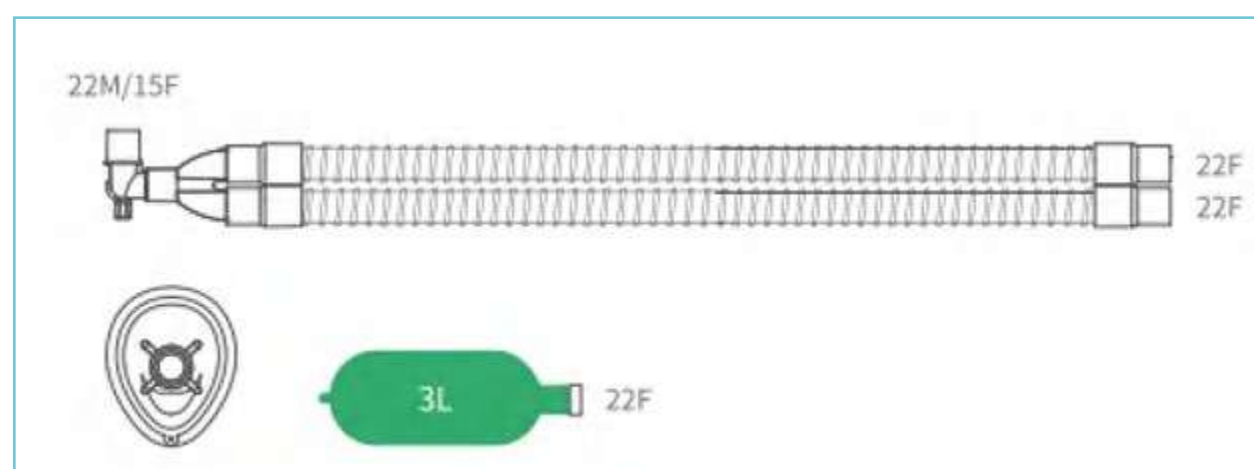

Smoothbore	
Length	NO.
1.2m	B0640
1.5m	B0641
1.8m	B0642

■ Anesthesia Circuit, Breathing bag HMEF, Anesthesia mask

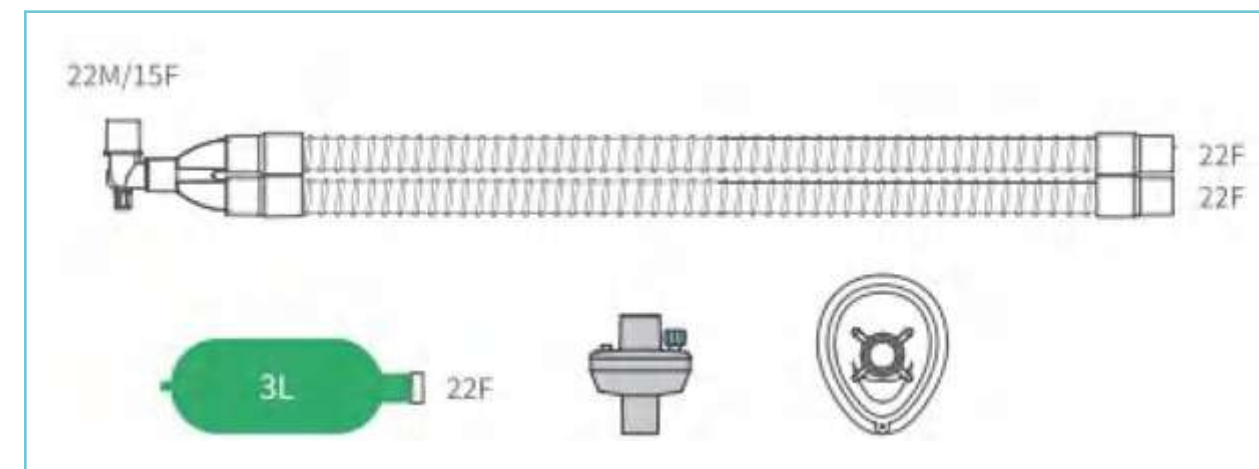


Smoothbore	
Length	NO.
1.2m	B0736
1.5m	B0737
1.8m	B0738

Anesthesia circuit, Breathing bag




Corrugated	
Length	NO.
1.2m	B0236
1.5m	B0237
1.8m	B0238

Anesthesia Circuit (Extendible)

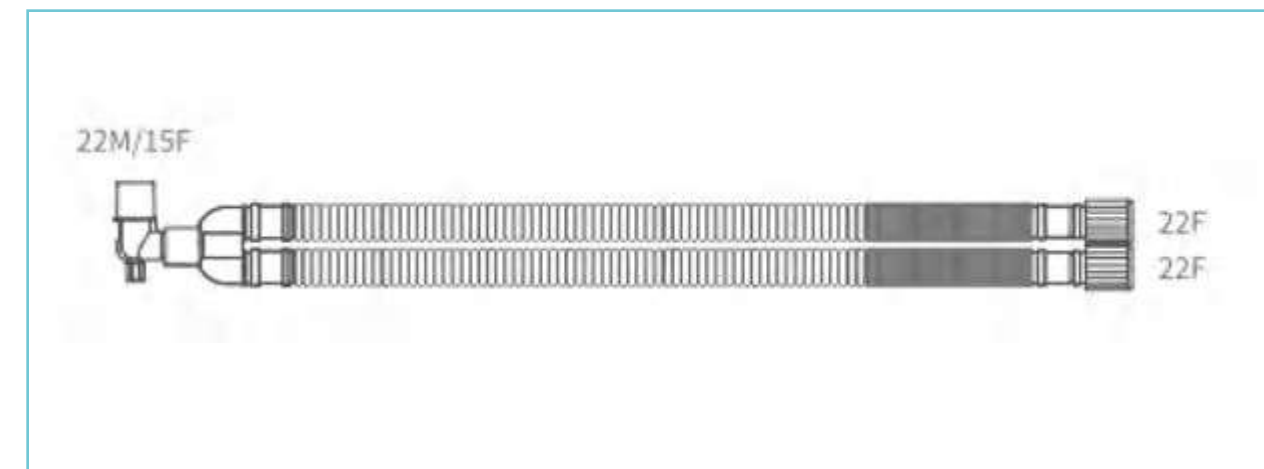

Extendible	
Length	NO.
1.2m	B0498
1.5m	B0499
1.8m	B0500

Anesthesia circuit, Breathing bag, HMEF

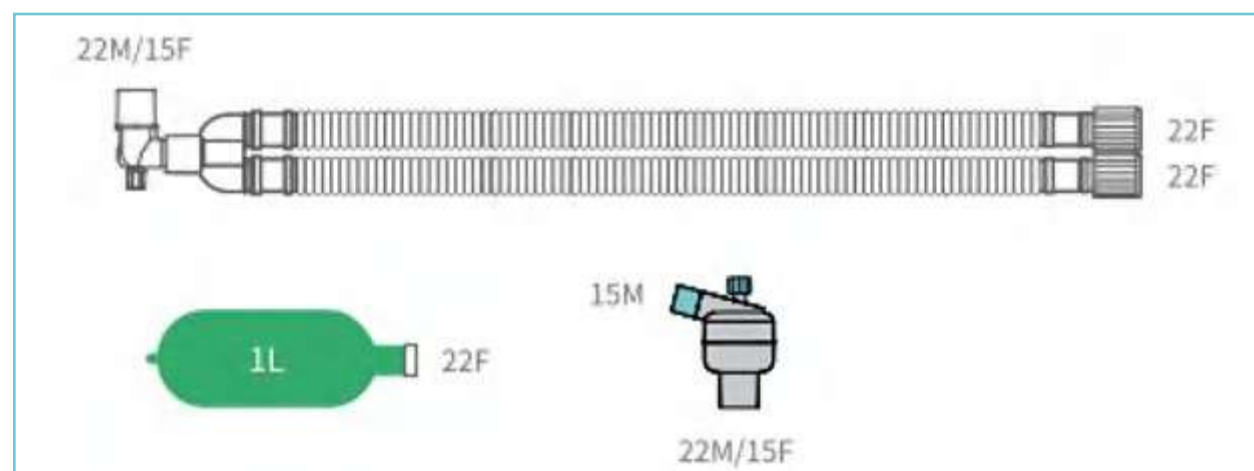


Corrugated	
Length	NO.
1.2m	B0248
1.5m	B0249
1.8m	B0250

Anesthesia Circuit, Anesthesia mask




Extendible	
Length	NO.
1.2m	B0525
1.5m	B0526
1.8m	B0527

Anesthesia Circuit, Breathing bag HMEF, Anesthesia mask

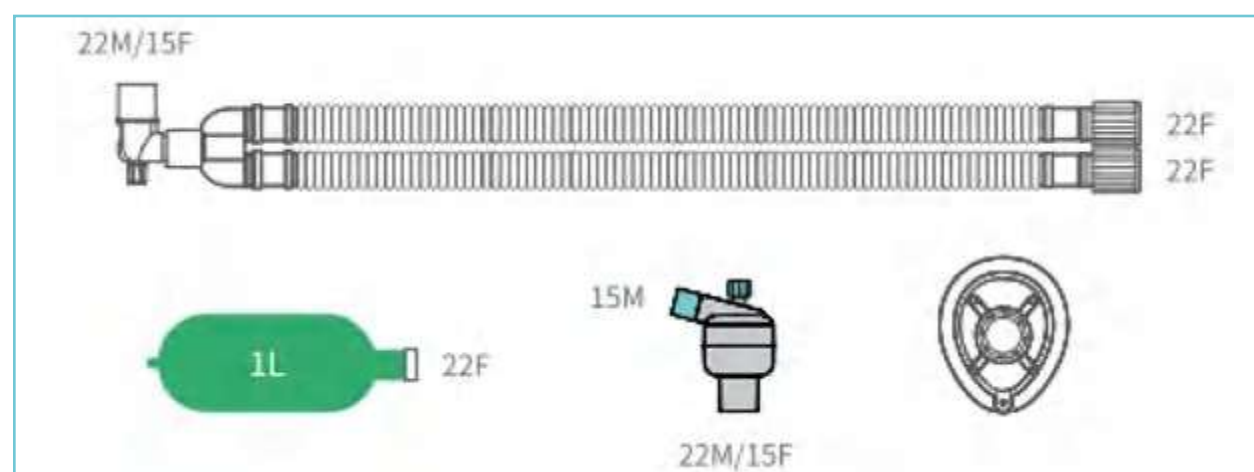


Corrugated	
Length	NO.
1.2m	B0269
1.5m	B0270
1.8m	B0271

Anesthesia Circuit, Anesthesia mask, Breathing bag

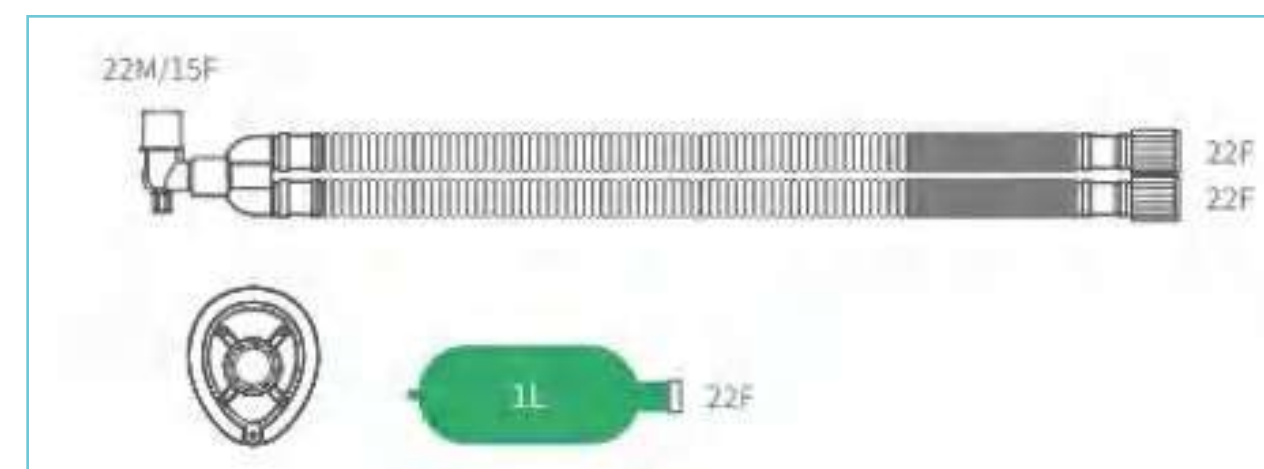


Extendible	
Length	NO.
1.2m	B0537
1.5m	B0538
1.8m	B0539

Anesthesia circuit, Breathing bag

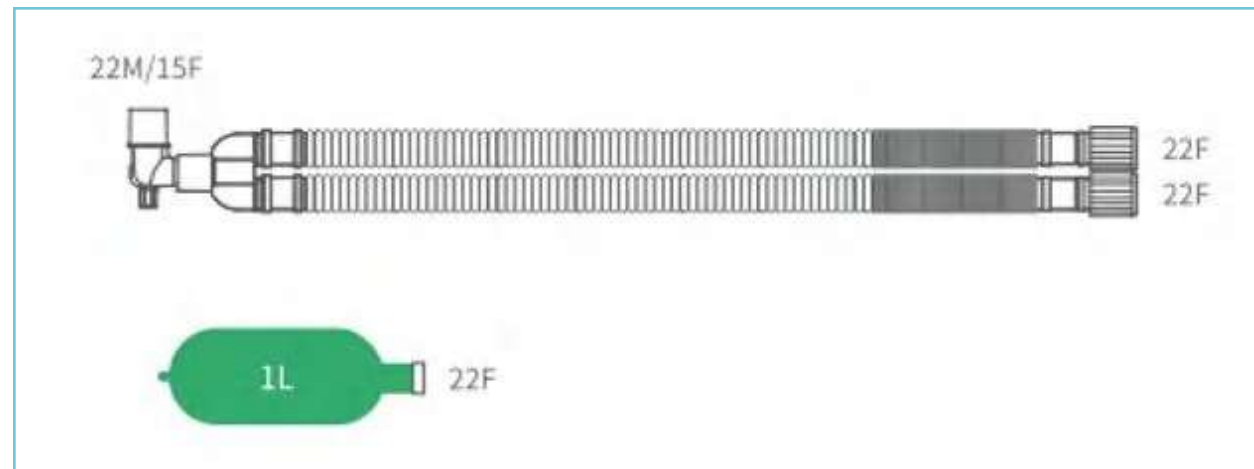


Extendible	
Length	NO.
1.2m	B0510
1.5m	B0511
1.8m	B0512

Anesthesia circuit, Breathing bag, HMEF

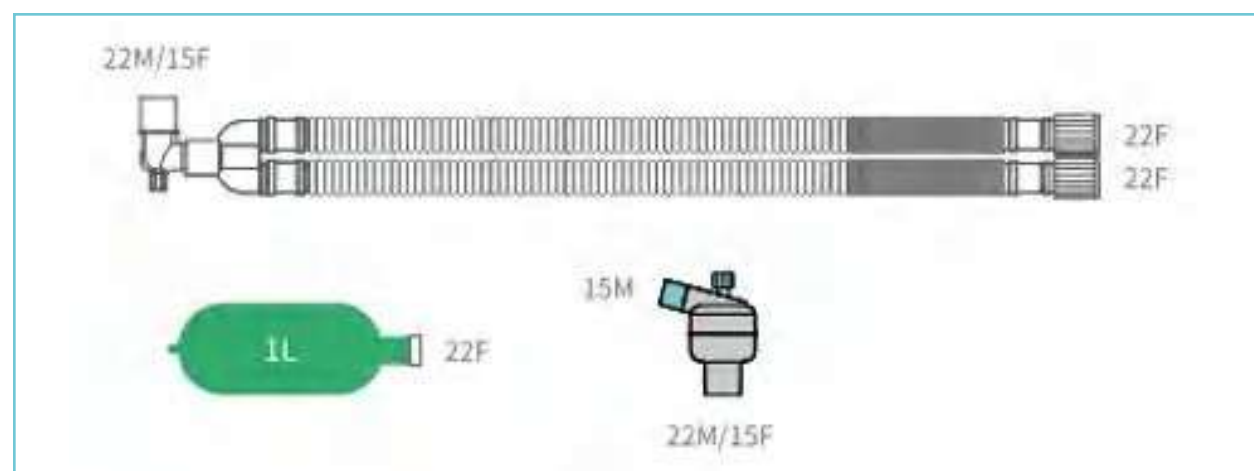


Extendible	
Length	NO.
1.2m	B0522
1.5m	B0523
1.8m	B0524

Anesthesia Circuit, Breathing bag HMEF,Anesthesia mask

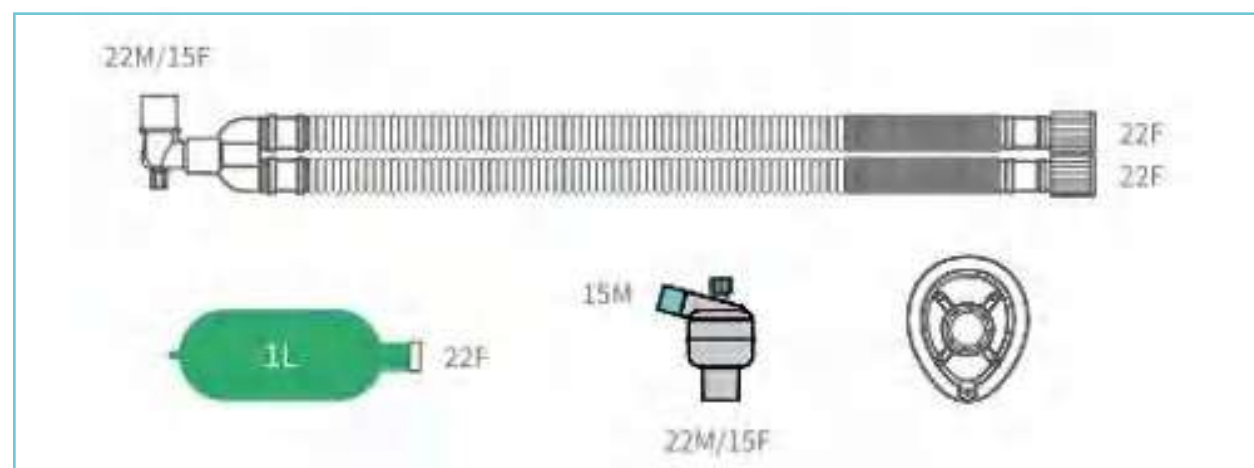


Extendible	
Length	NO.
1.2m	B0543
1.5m	B0544
1.8m	B0545

Anesthesia Circuit (Smoothbore)

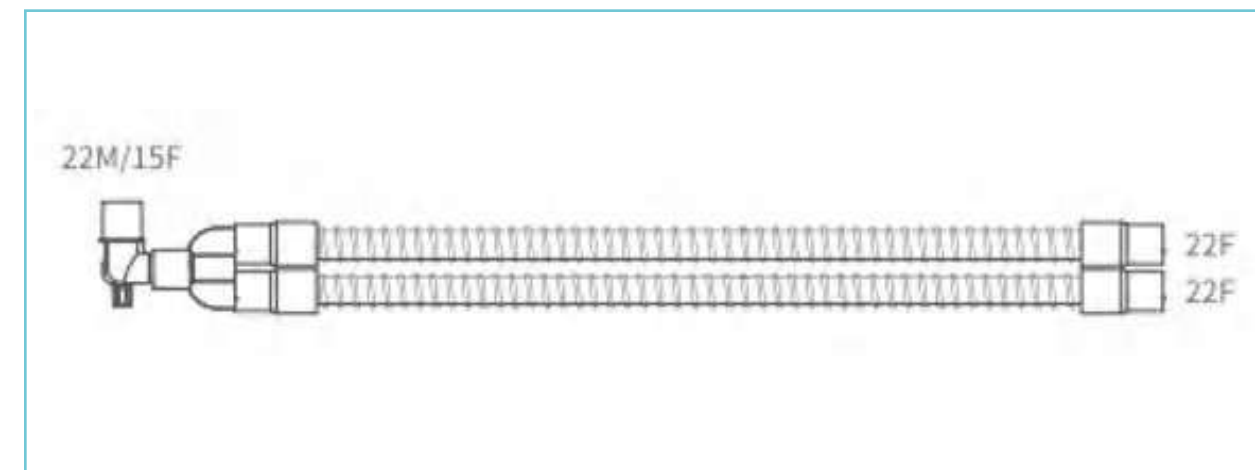


Smoothbore	
Length	NO.
1.2m	B0772
1.5m	B0773
1.8m	B0774

Anesthesia Circuit, Anesthesia mask

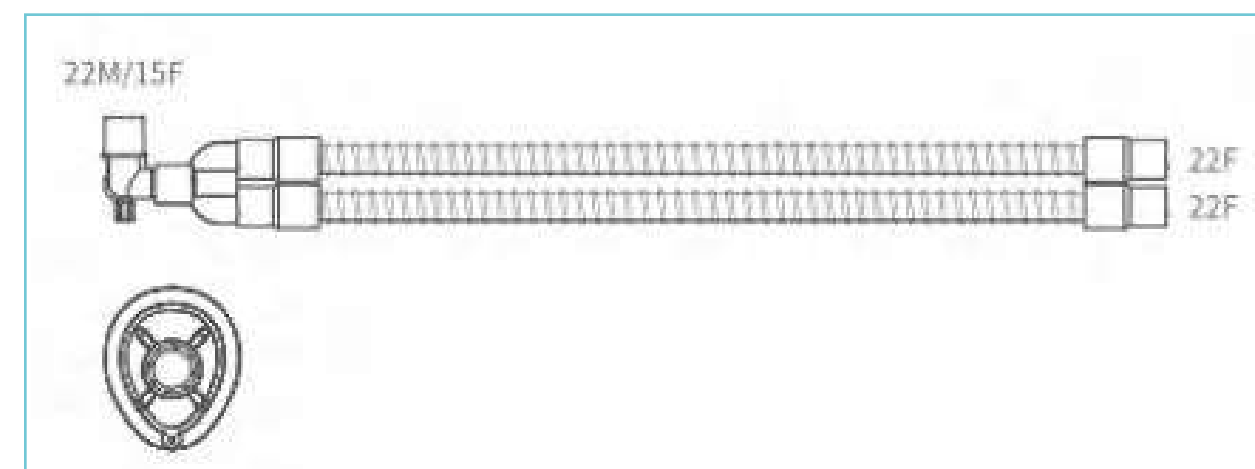


Extendible	
Length	NO.
1.2m	B0522
1.5m	B0523
1.8m	B0524

Anesthesia Circuit, Breathing bag HMEF,Anesthesia mask

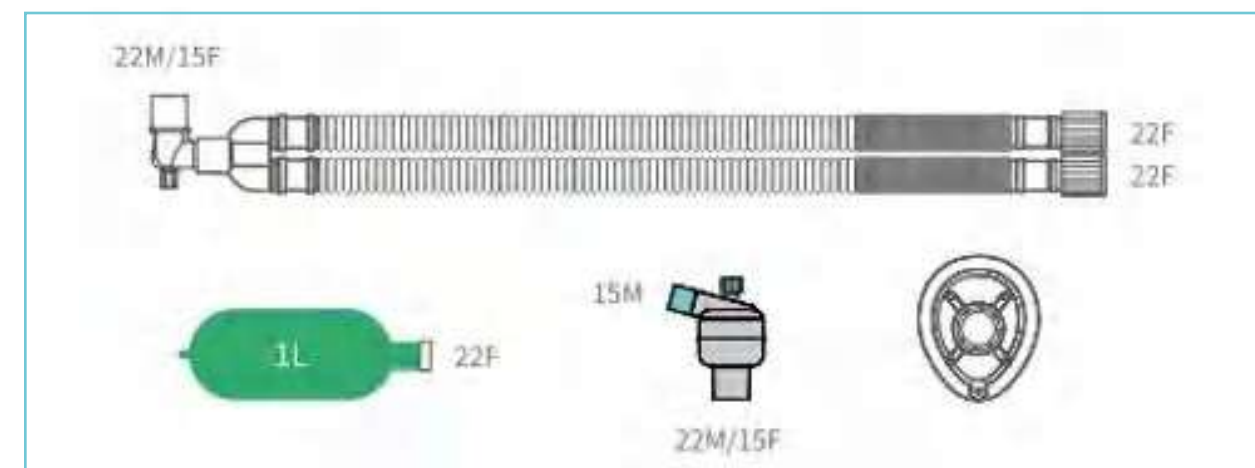


Extendible	
Length	NO.
1.2m	B0543
1.5m	B0544
1.8m	B0545

Anesthesia circuit, Breathing bag

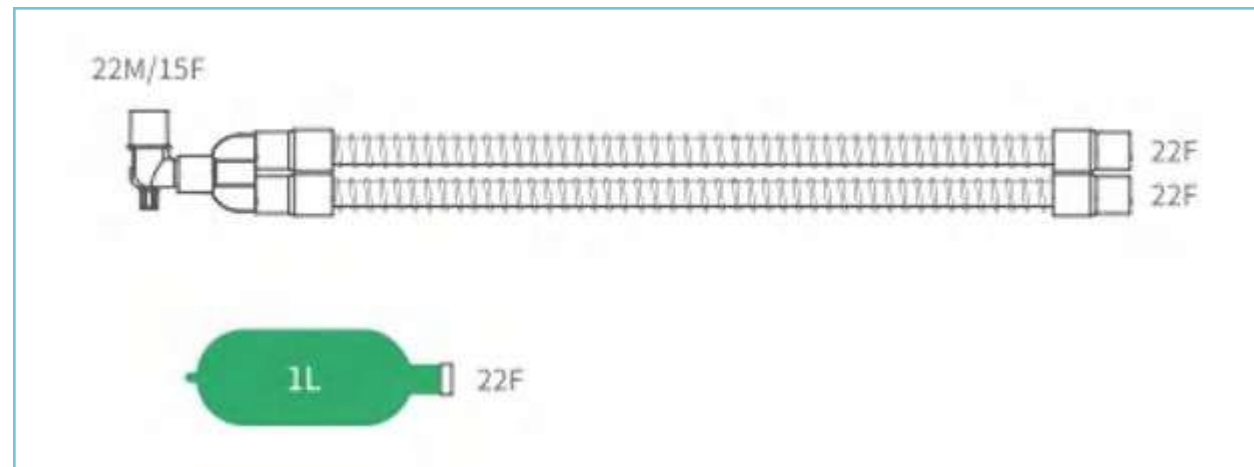


Smoothbore	
Length	NO.
1.2m	B0784
1.5m	B0785
1.8m	B0786

Anesthesia circuit, Breathing bag, HMEF

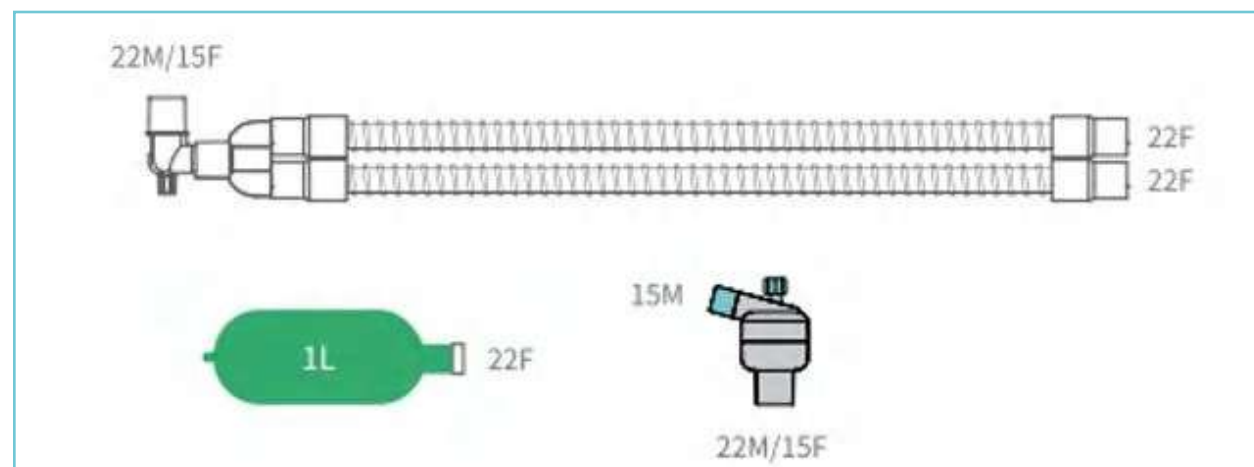


Smoothbore	
Length	NO.
1.2m	B0796
1.5m	B0797
1.8m	B0798

Anesthesia Circuit, Breathing bag HMEF, Anesthesia mask

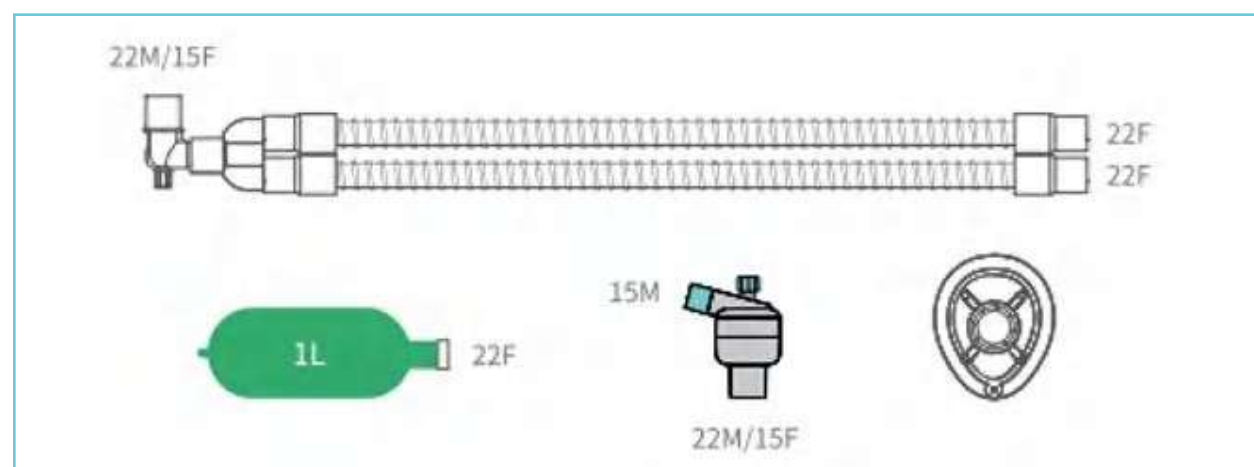


Smoothbore	
Length	NO.
1.2m	B0817
1.5m	B0818
1.8m	B0819

Coaxial Circuit

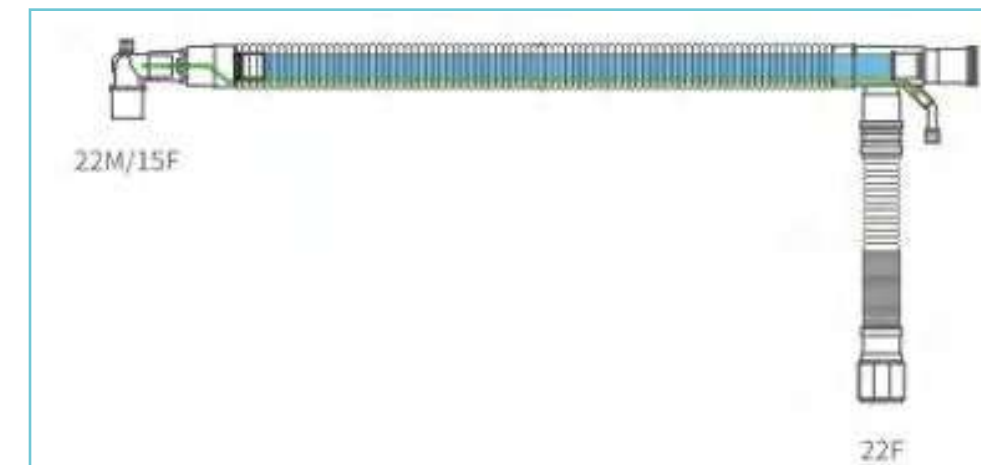

Coaxial Circuit	
Description	NO.
1.5m Coaxial Circuit	A20001-1
1.8m Coaxial Circuit	A20003-1


Adult Corrugated/Extendable Limb, Coaxial Circuit

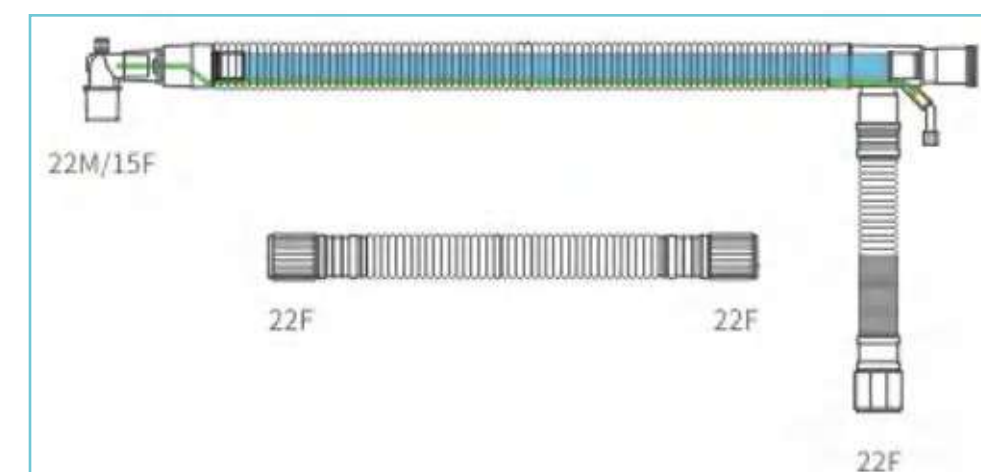

Corrugated Limb	
Description	NO.
1.5m circuit, 0.4m corrugated limb	A20001
1.8m circuit, 0.4m corrugated limb	A20003

Extendable Limb	
Description	NO.
1.5m circuit, 0.4m extendable limb	A20002
1.8m circuit, 0.4m extendable limb	A20004


Coaxial Circuit, 2L/3L Breathing bag, Adult Corrugated/Extendable Limb

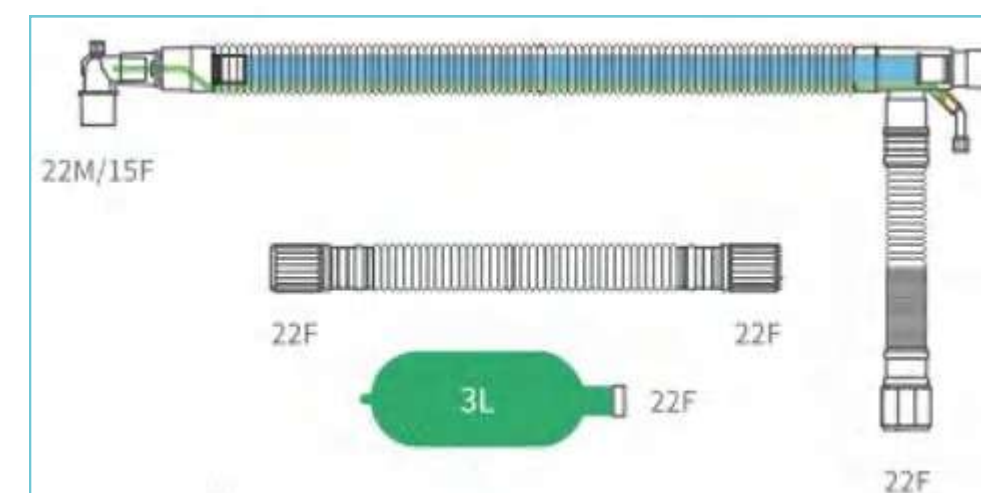

Corrugated Limb	
Description	NO.
1.5m Circuit, 2L Breathing bag, 0.4m Corrugated Limb	A20009
1.8m Circuit, 2L Breathing bag, 0.4m Corrugated Limb	A20011
1.5m Circuit, 3L Breathing bag, 0.4m Corrugated Limb	A20005
1.8m Circuit, 3L Breathing bag, 0.4m Corrugated Limb	A20007


Extendable Limb	
Description	NO.
1.5m Circuit, 2L Breathing bag, 0.4m Extendable Limb	A20010
1.8m Circuit, 2L Breathing bag, 0.4m Extendable Limb	A20012
1.5m Circuit, 3L Breathing bag, 0.4m Extendable Limb	A20006
1.8m Circuit, 3L Breathing bag, 0.4m Extendable Limb	A20008

Anesthesia circuit, Breathing bag

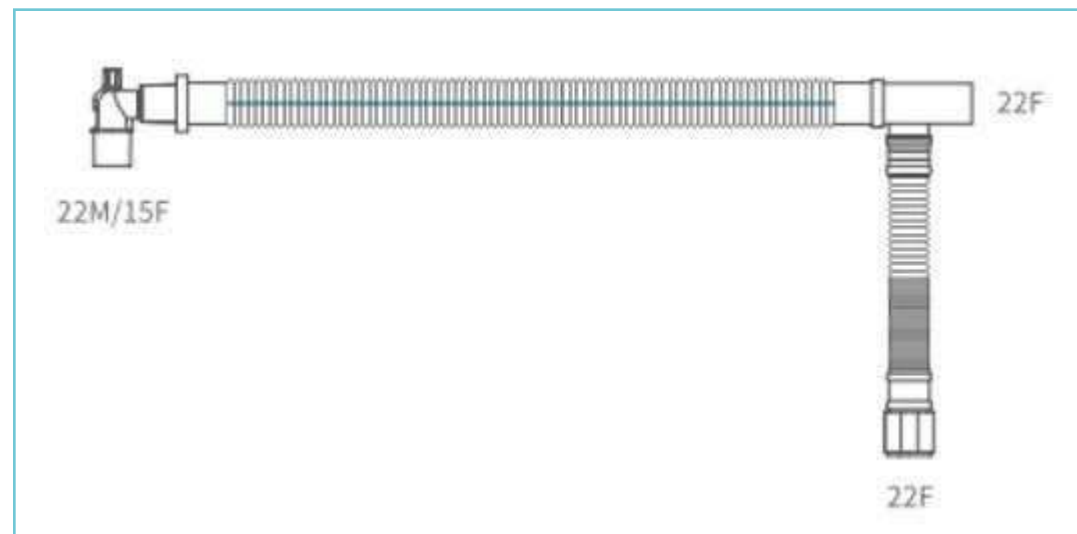

Duo Limbo Circuits	
Description	NO.
1.5m Duo Limbo Circuits	A30002-1
1.8m Duo Limbo Circuits	A30004-1


Adult Corrugated/Extendable Limb, Coaxial Circuit

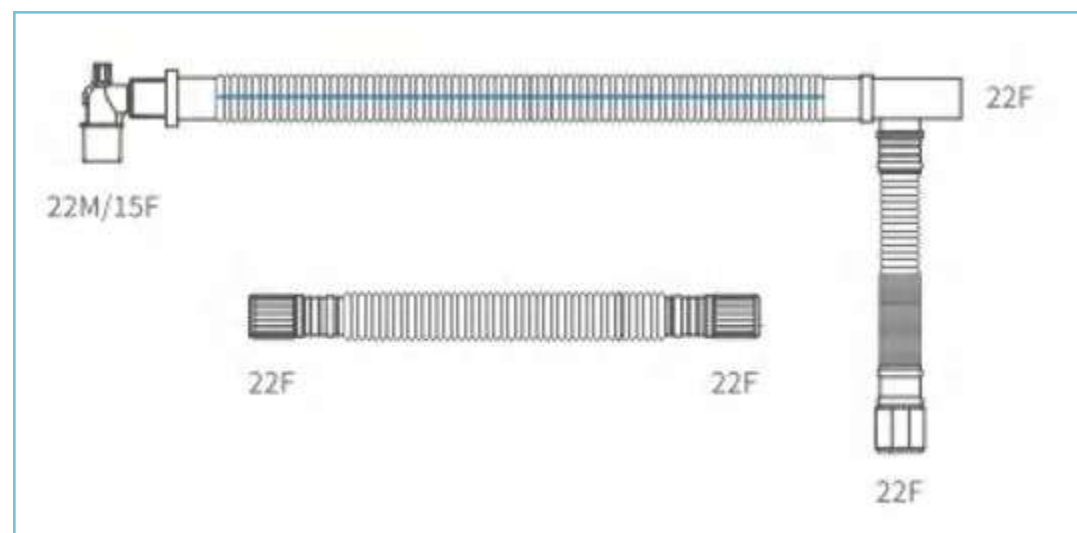

Corrugated Limb	
Description	NO.
1.5m circuit, 0.4m corrugated limb	A30002
1.8m circuit, 0.4m corrugated limb	A30004

Extendable Limb	
Description	NO.
1.5m circuit, 0.4m extendable limb	A30003
1.8m circuit, 0.4m extendable limb	A30005


Coaxial Circuit, 2L/3L Breathing bag, Adult Corrugated/Extendable Limb

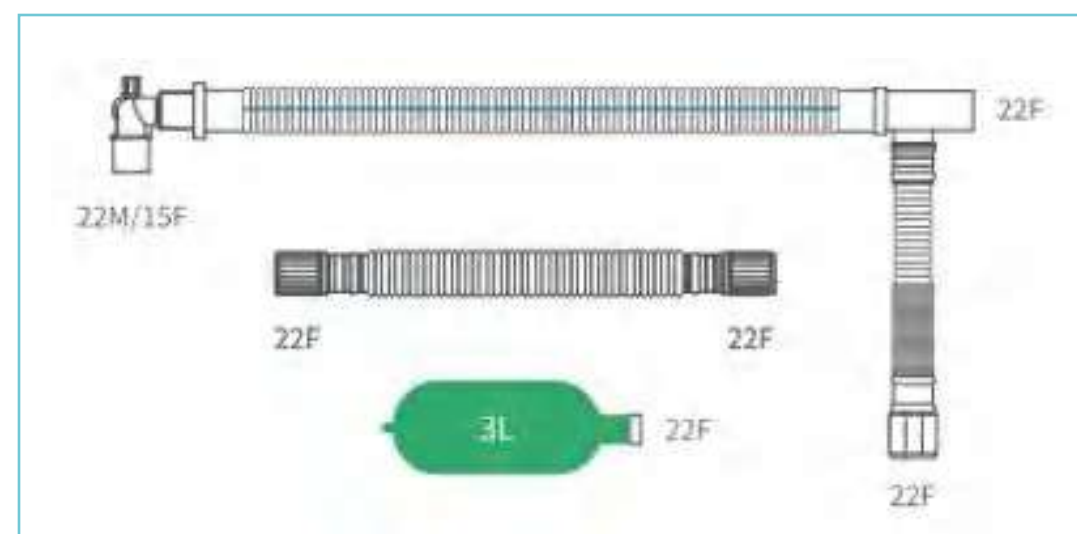

Corrugated Limb	
Description	NO.
1.5m circuit, 0.4m corrugated limb	A30002
1.8m circuit, 0.4m corrugated limb	A30004


Extendable Limb	
Description	NO.
1.5m circuit, 0.4m extendable limb	A30003
1.8m circuit, 0.4m extendable limb	A30005

Adult Breathing Circuit

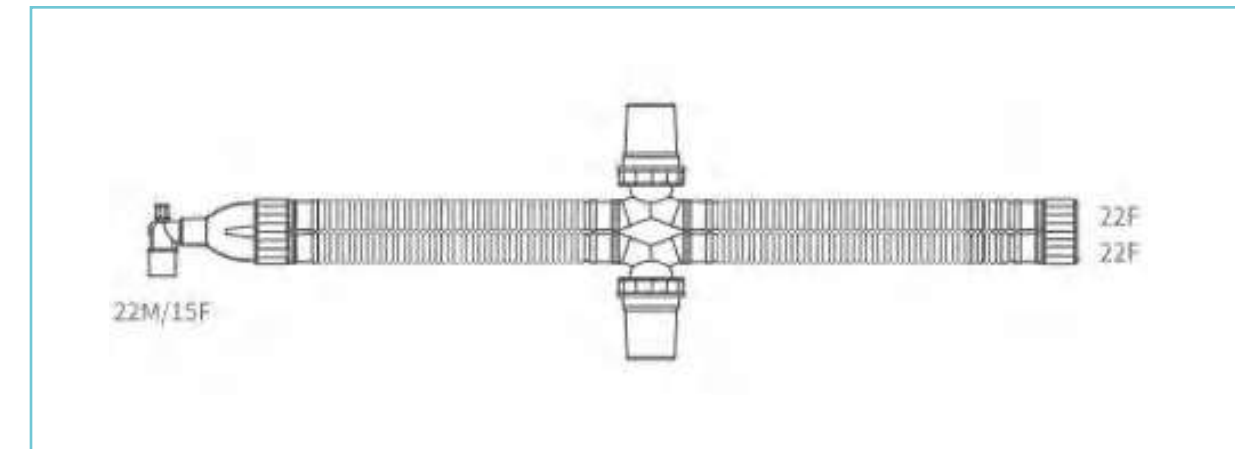


Corrugated	
Length	NO.
1.5m	A10001-1
1.8m	A10002-1

Adult Corrugated/Extendable Limb, Coaxial Circuit

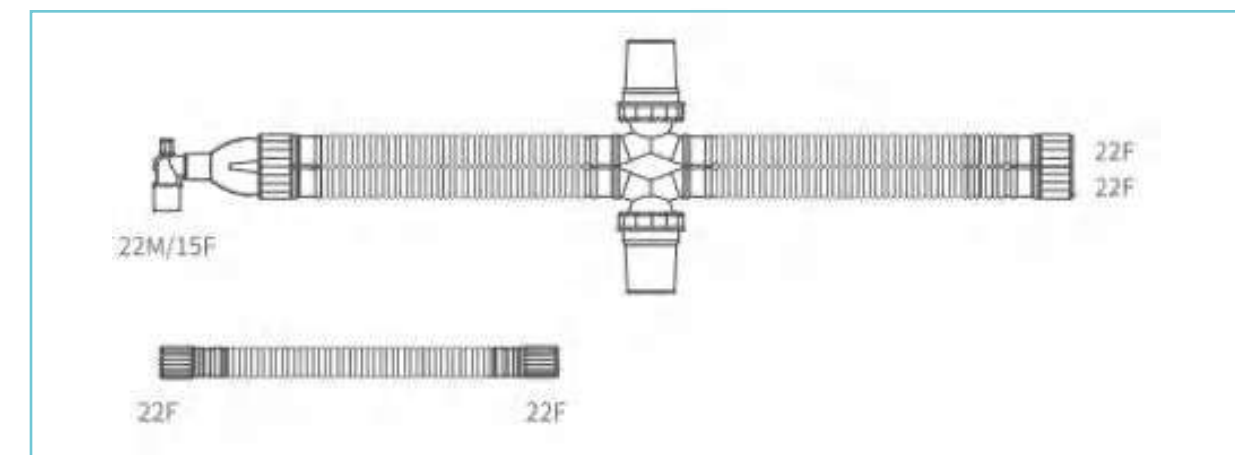


Corrugated	
Length	NO.
1.5m	A10001
1.8m	A10002

Adult Breathing Circuit 0.4m limb, GSL, clip, hook

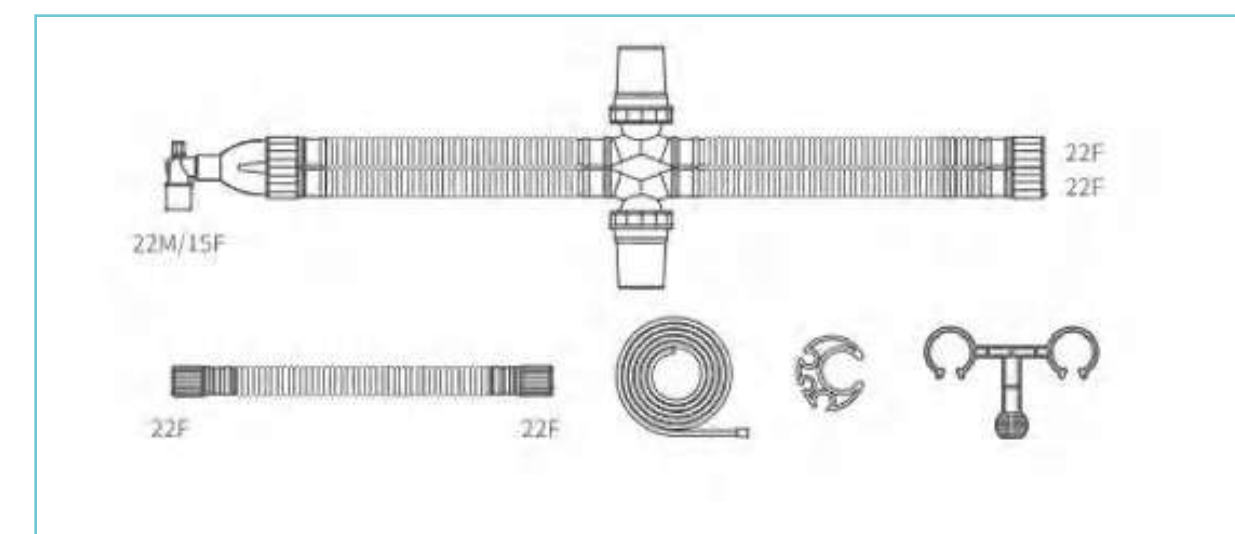


Corrugated	
Length	NO.
1.5m	A60001-1
1.8m	A60007-1

Pediatric Breathing Circuit

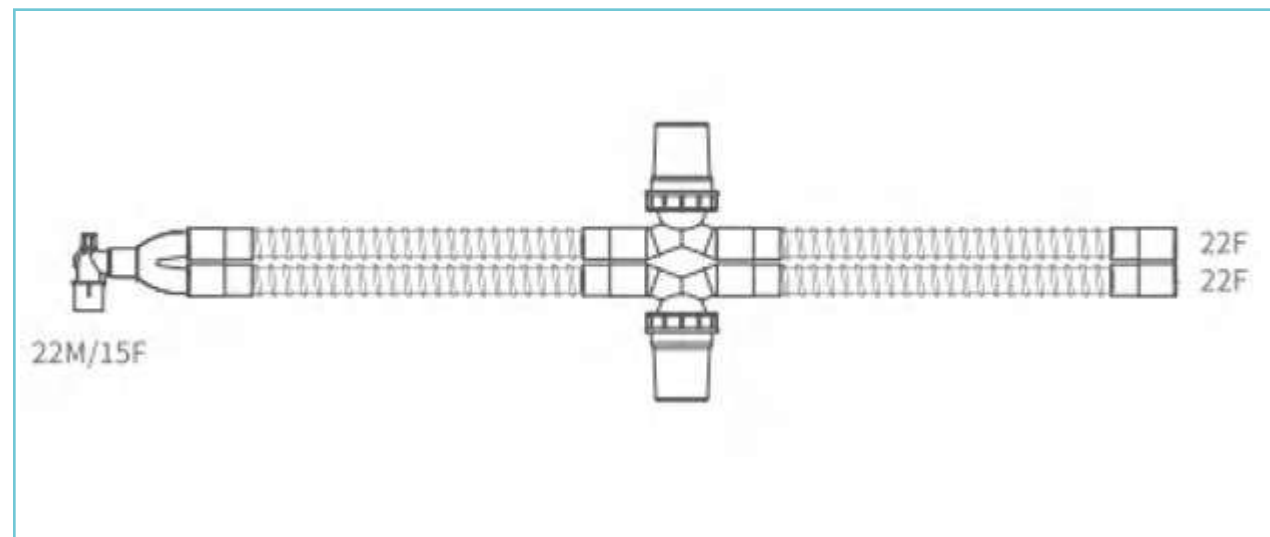


Smoothbore	
Length	NO.
1.5m	A10011-1
1.8m	A10012-1

Pediatric Breathing Circuit, 0.4m limb

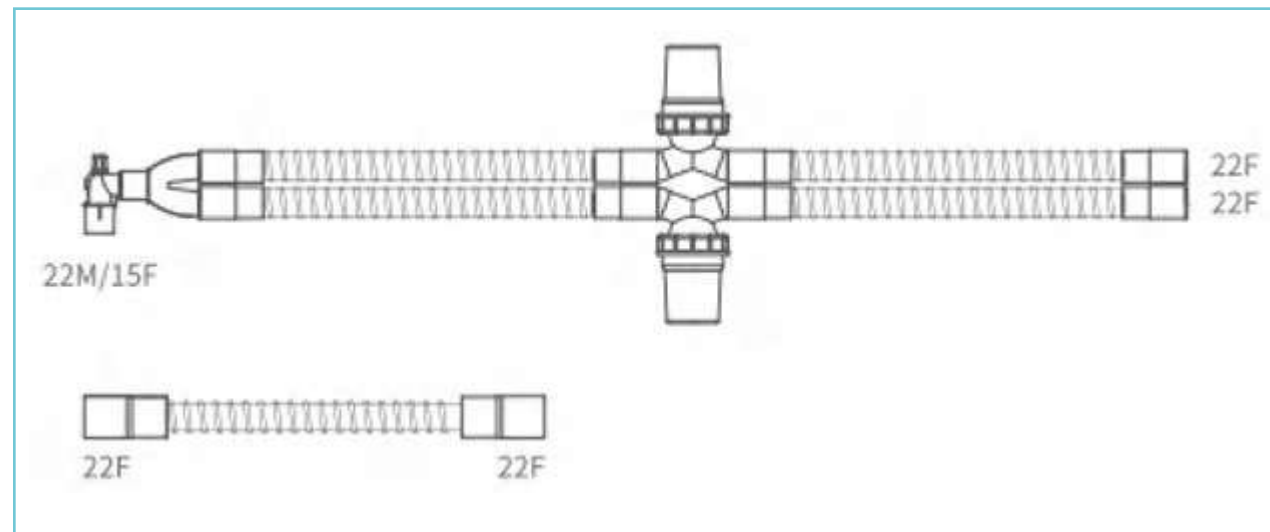


Smoothbore	
Length	NO.
1.5m	A10011
1.8m	A10012

Pediatric Breathing Circuit.0.4m limb, GSL, clip, hook

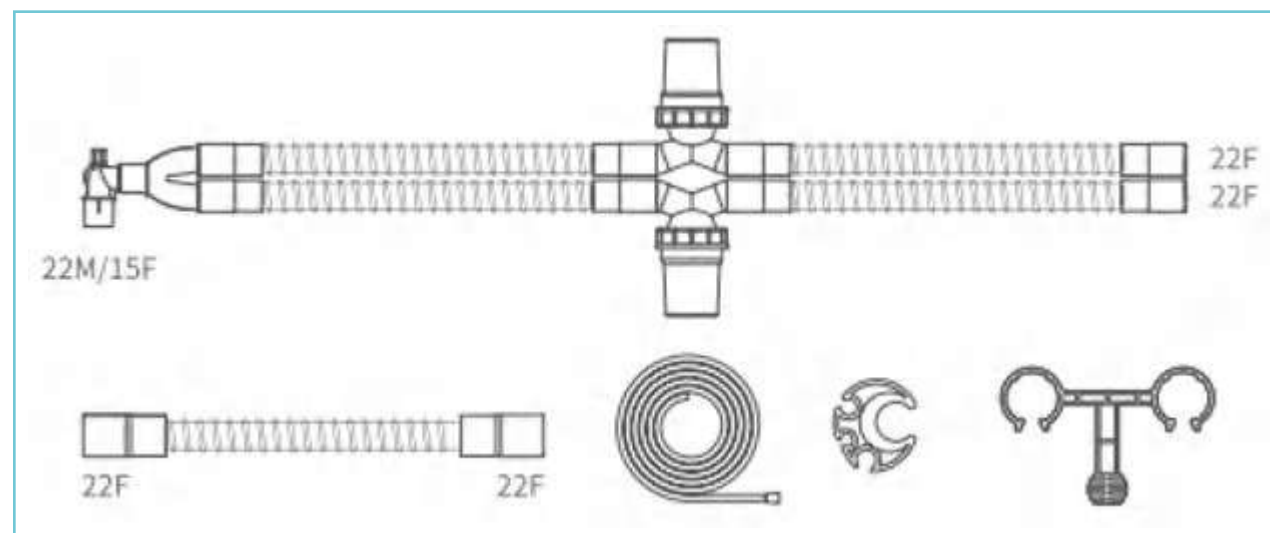


Smoothbore	
Length	NO.
1.5m	A70003-1
1.8m	A70010-1

Adult Breathing Circuit, Sampling Tube, Adult Water Traps, Clip, Adult HMEF, Catheter Mount, 0.4m Adult Limb

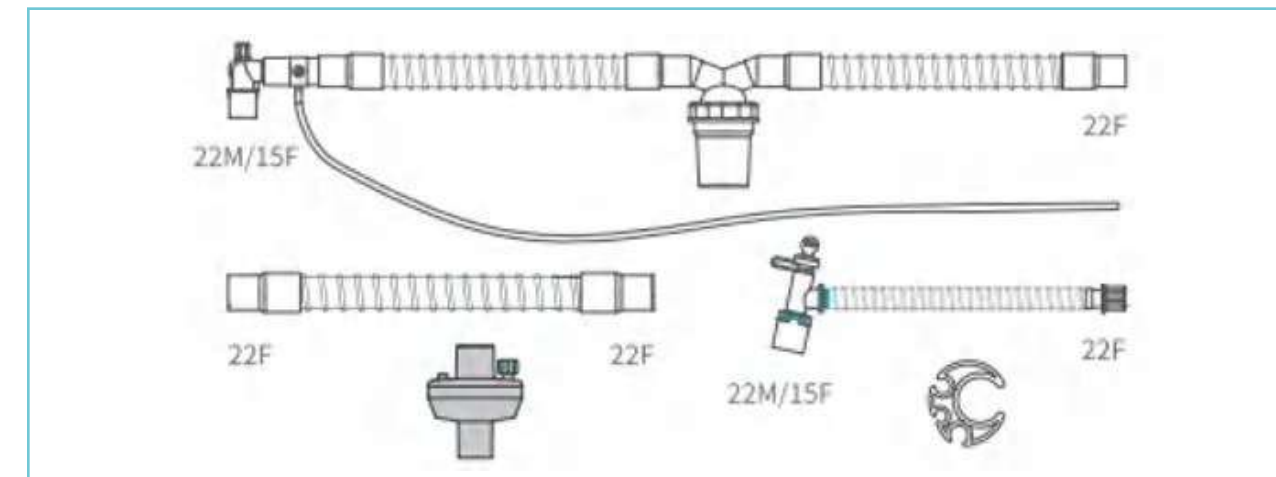

Smoothbore	
Length	NO.
1.2m	A40003


Adult Breathing Circuit, Sampling Tube, Adult Water Traps, Clip

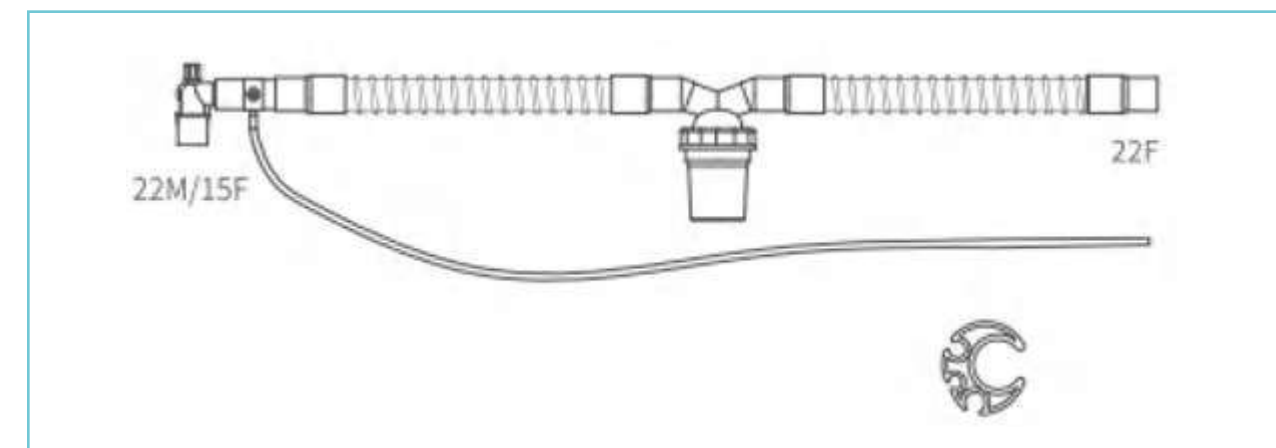

Corrugated	
Length	NO.
1.5m	A40013
1.8m	A40009

Smoothbore	
Length	NO.
1.5m	A40006
1.8m	A40012


Adult Breathing Circuit, Adult Water Traps, Sampling Tube, Clip, Adult Limb(0.4m/0.8m)

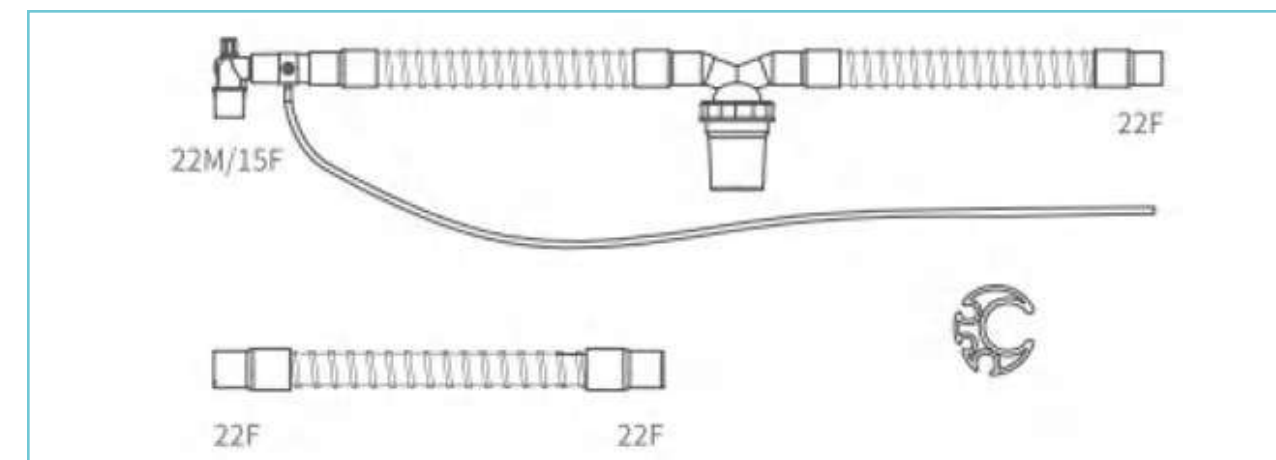

Corrugated	
Length	NO.
1.5m(0.4m Limb)	A40001
1.8m(0.4m Limb)	A40007
1.5m(0.8m Limb)	A40002
1.8m(0.8m Limb)	A40008


Smoothbore	
Length	NO.
1.5m(0.4m Limb)	A40004
1.8m(0.4m Limb)	A40010
1.5m(0.8m Limb)	A40005
1.8m(0.8m Limb)	A40011

Hyperbaric Oxygen Circuits

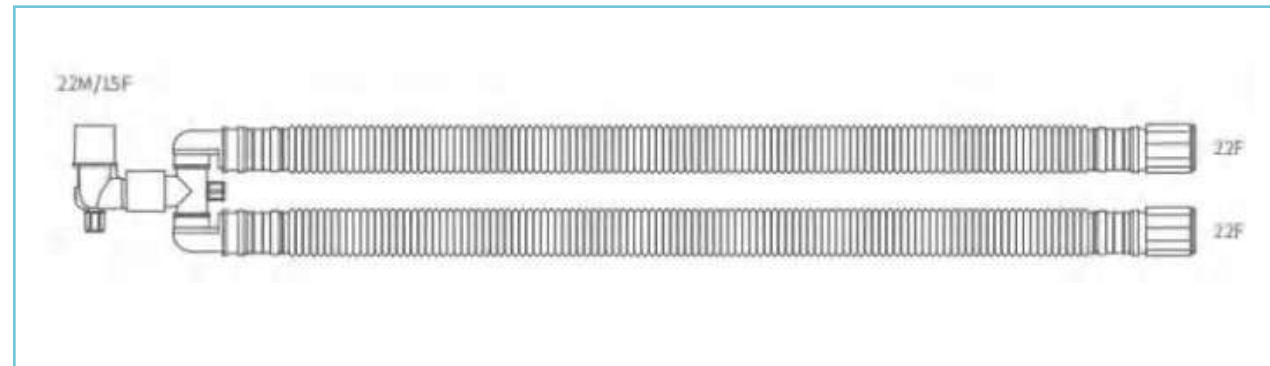

Corrugated	
Length	NO.
1.5m	1400005
1.8m	1400005


Circuit Rolls

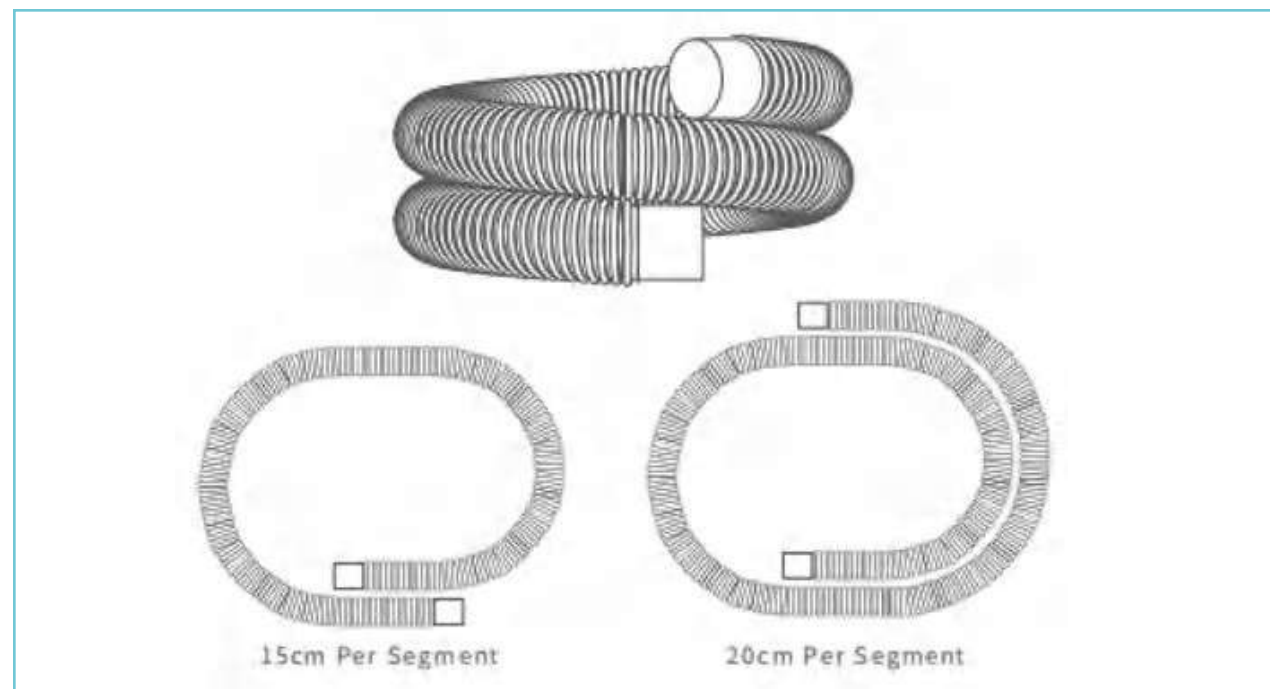

Corrugated (Adult)	
Specification	NO.
22mm, 15cm Per Segment	1800001
22mm, 20cm Per Segment	1800000

Corrugated (Pediatric)	
Specification	NO.
15mm, 15cm Per Segment	1810001
15mm, 20cm Per Segment	1810000

Anesthesia Catheter Mounts

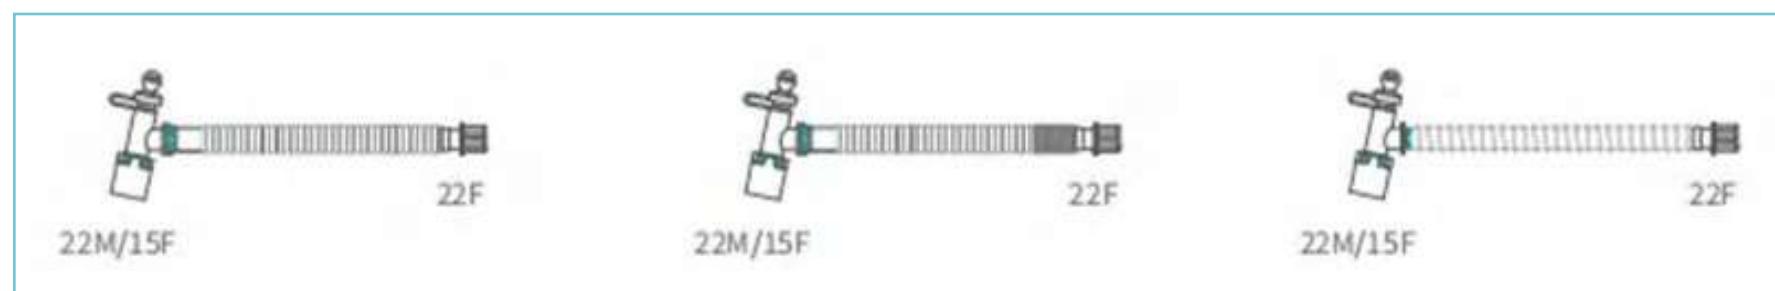

Corrugated		Extendable		Smoothbore	
Description	NO.	Description	NO.	Description	NO.
0.10m Corrugated Catheter Mount	A50031	0.10m Extendable Catheter Mount	A50034	0.10m Smoothbore Catheter Mount	A50037
0.15m Corrugated Catheter Mount	A50032	0.15m Extendable Catheter Mount	A50035	0.15m Smoothbore Catheter Mount	A50038
0.20m Corrugated Catheter Mount	A50033	0.20m Extendable Catheter Mount	A50036	0.20m Smoothbore Catheter Mount	A50039


Limbs



Adult		Pediatric	
Description	NO.	Description	NO.
0.4m Adult Corrugated Limb	A50001	0.4m Pediatric Corrugated Limb	A50016
0.8m Adult Corrugated Limb	A50002	0.8m Pediatric Corrugated Limb	A50017
1.2m Adult Corrugated Limb	A50003	1.2m Pediatric Corrugated Limb	A50018
1.5m Adult Corrugated Limb	A50004	1.5m Pediatric Corrugated Limb	A50019
1.8m Adult Corrugated Limb	A50005	1.8m Pediatric Corrugated Limb	A50020




Adult		Pediatric	
Description	NO.	Description	NO.
0.4m Adult Extendable Limb	A50006	0.4m Pediatric Extendable Limb	A50021
0.8m Adult Extendable Limb	A50007	0.8m Pediatric Extendable Limb	A50022
1.2m Adult Extendable Limb	A50008	1.2m Pediatric Extendable Limb	A50023
1.5m Adult Extendable Limb	A50009	1.5m Pediatric Extendable Limb	A50024
1.8m Adult Extendable Limb	A50010	1.8m Pediatric Extendable Limb	A50025




Adult		Pediatric	
Description	NO.	Description	NO.
0.4m Adult Smoothbore Limb	A50011	0.4m Pediatric Smoothbore Limb	A50026
0.8m Adult Smoothbore Limb	A50012	0.8m Pediatric Smoothbore Limb	A50027
1.2m Adult Smoothbore Limb	A50013	1.2m Pediatric Smoothbore Limb	A50028
1.5m Adult Smoothbore Limb	A50014	1.5m Pediatric Smoothbore Limb	A50029
1.8m Adult Smoothbore Limb	A50015	1.8m Pediatric Smoothbore Limb	A50030

Latex / Latex free Reservoir Bags

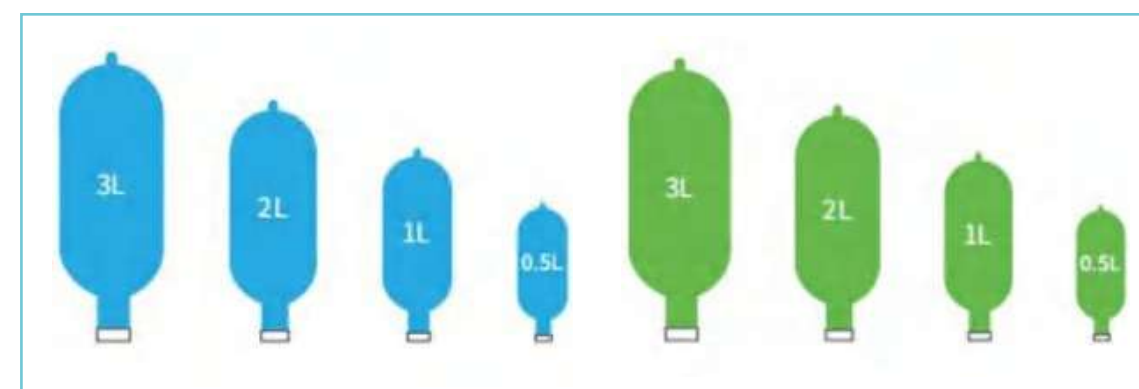


Latex Reservoir Bags	
Description	NO.
0.5L Latex Reservoir Bag	6100005
1L Latex Reservoir Bag	6100001
2L Latex Reservoir Bag	6100002
3L Latex Reservoir Bag	6100003

Anesthesia Mask A - Gas Valve Up

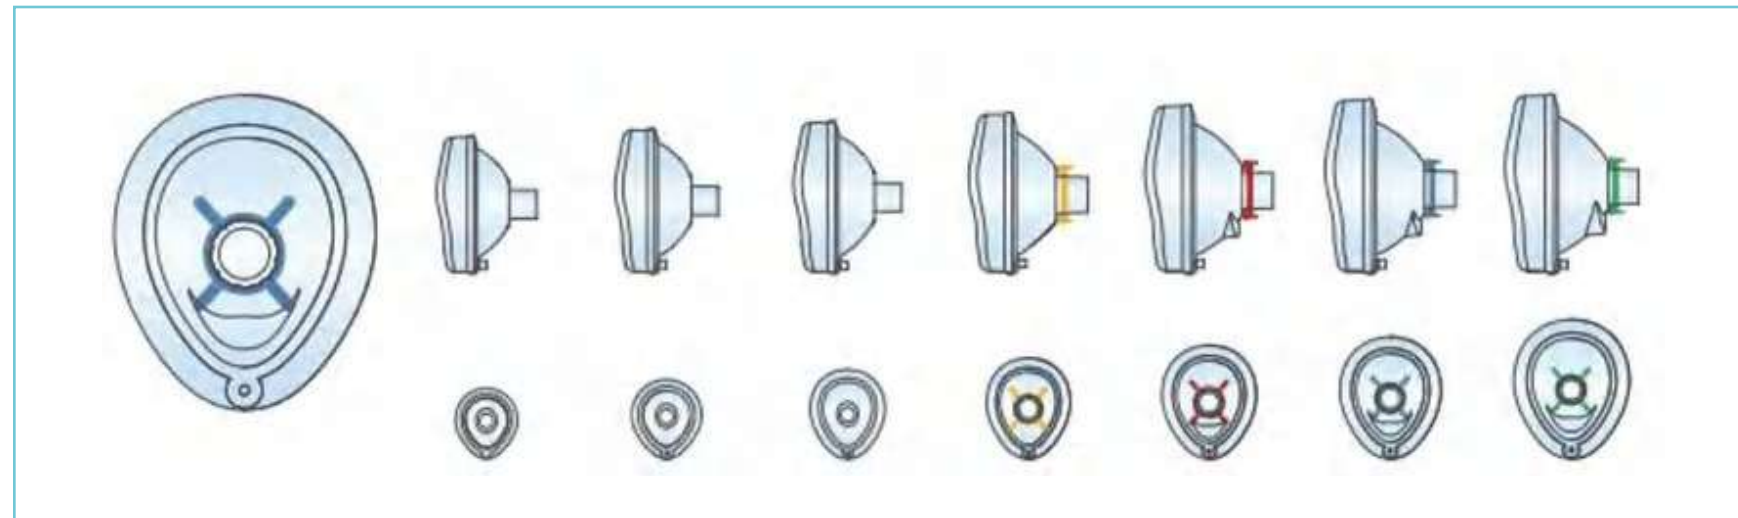

NO.	A2000	A2001	A2002	A2003	A2004	A2005	A2006
Model	0#	1#	2#	3#	4#	5#	6#
Connector Size	15M	15M	15M	22F	22F	22F	22F
Retainer Ring				✓	✓	✓	✓
Color				Yellow	Red	Blue	Green

Anesthesia Mask B - Gas Valve Horizontal

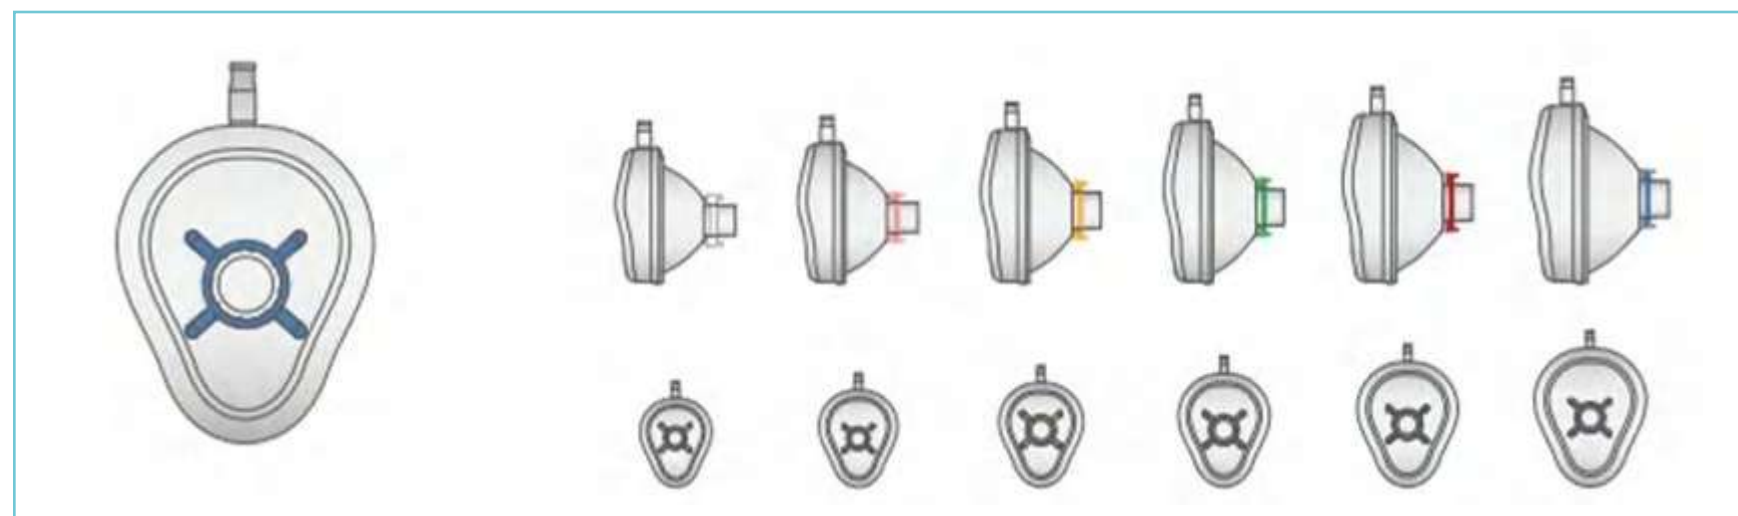

NO.	B2100	B2101	B2103	B2105	B2106	B2108
Model	0#	1#	2#	3#	4#	5#
Connector Size	15M	15M	22F	22F	22F	22F
Retainer Ring	✓	✓	✓	✓	✓	✓
Color	White	Red	Yellow	Green	Red	Blue

CPR Masks



CPR Mask	
Case Color	NO.
White	2300002
Yellow	2301002
Blue	2302002

Oxygen Masks



Oxygen Mask	
Description	NO.
S, Adult, Medium Concentration Oxygen Mask, with 2m O ₂ Tube	2110001
M, Adult, Medium Concentration Oxygen Mask, with 2m O ₂ Tube	2110002
L, Adult, Medium Concentration Oxygen Mask, with 2m O ₂ Tube	2110003
XL, Adult, Medium Concentration Oxygen Mask, with 2m O ₂ Tube	2110004

Hyperbaric Oxygen Masks



Hyperbaric Oxygen Mask	
Description	NO.
Hyperbaric Oxygen Mask	2400002

■ Non-Rebreathing Mask



- The anti-reflux design prevents the oxygen, flowing into the bag.
- Oxygen concentration up to 60%-80%.

■ Adjustable Concentration Mask



- Venturi principle provide accurate oxygen concentration .
- The green connector can set 24% 26% 28% and 30% oxygen concentration, the white connector can set 35% 40% and 50% oxygen concentration.

■ Venturi Mask



- Venturi principle provide accurate oxygen concentration.
- Oxygen concentration locker: seven color connectors can set seven different oxygen concentrations.

■ Nebulizer

- Universal connector is available.
- High potency with less drug , least side-effect.
- High volume and transparent design, convenient to observe.
- Various specification are available, convenient to operate.



■ Mask Type

TYPE	CAT.NO
Infant	NEM006
Child	NEM110
Adult	NEM220

■ Bite Type

Straight Bite		Curved Bite	
VOL	CAT.NO	VOL	CAT.NO
6	NEBS06	6	NEBC06
10	NEBS10	10	NEBC10
20	NEBS20	20	NEBC20




■ Adjustable Handholding Comprehensive Type

Child		Adult	
VOL	CAT.NO	VOL	CAT.NO
6	NEH106	6	NEH206
10	NEH110	10	NEH210
20	NEH120	20	NEH220



■ Cartoon Mask Type

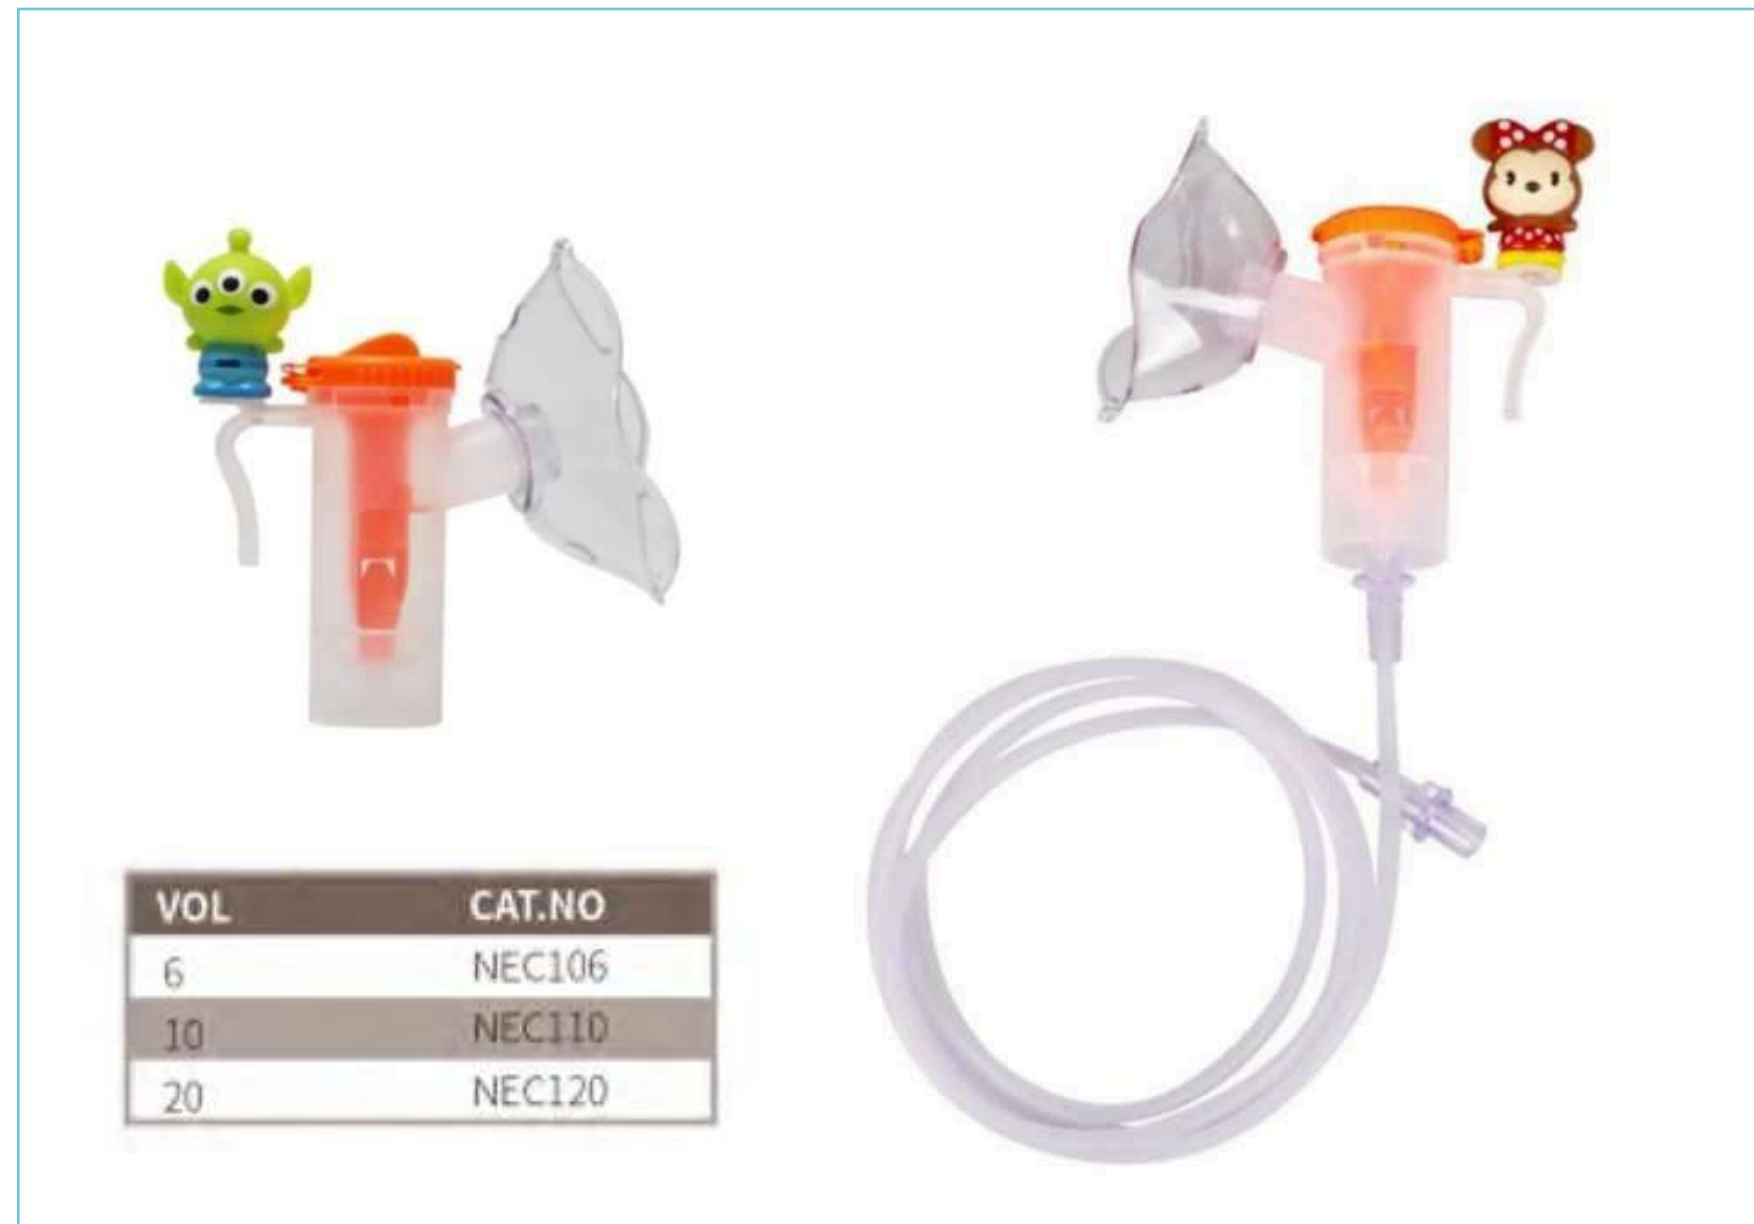

In china, we have worked with hospitals to set up many nebulizer rooms.



■ Disposable HMEFs

NO.	F1(3019)	F3(3136)
Luer port	✓	✓
Filtration efficiency	>99.99%	>99.99%
Resistance at 30L/min (kPa)	0.09	0.08
Resistance at 60L/min (kPa)	0.19	0.2
Compressible volume (mL)	17.4	19.9
Weight (g)	32.8	30.3
Minimum tidal volume (mL)	100	100

NO.	I1(3321)	G3(3308)
Luer port	✓	✓
Filtration efficiency	>99.99%	>99.99%
Resistance at 30L/min (kPa)	0.05	0.05
Resistance at 60L/min (kPa)	0.11	0.11
Compressible volume (mL)	29	48.6
Weight (g)	24.5	25.1
Minimum tidal volume (mL)	75	100

Airway assist device/Choking rescue device



Respiratory trainer



- **ADJUSTABLE RESISTANCE**
Independent adjustment of exhalation or inhalation resistance, wider adjustable range with with 6 inspiratory and 5 expiratory settings. It can perform exhalation training, inhalation training or a combination of both according to training needs, suitable for more people
- **COMFORTABLE & SAFE**
Medical-grade silicone mouthpiece, no odor, more comfortable

Airway assist device



Respiratory trainer



■ PVC Nasal Oxygen Cannula



- Available with different length to suit all patients' requirement
- Available with a wide selection of prong types
- The soft curved prong can offer the best possible comfort to patient

■ Tracheostomy Mask



- 360 degree swivel connector provides maximum patient comfort
- Offered with universal connector for suction and oxygen delivery

■ PVC Nebulizer with Mouth Piece Nebulizer Kit



- Atomization rate is about 0.3ml/min
- Drive gas flow is about 4 to 8 L/min
- Atomization particle $\leq 5\mu\text{m}$
- More choices of T piece and mouthpiece

■ PVC Nasal Oxygen Catheter with Fixed Compress or Plain Type




- Suitable for easy and efficient administration of oxygen
- Soft and smooth open distal end facilitates non-traumatic insertion

■ PVC O2 + CO2 Sampling Nasal Oxygen Cannula




- Available with two sizes
- Designed for oxygen supply and sampling of exhaled CO2 gas simultaneously
- Soft prongs minimize irritation

■ Disposable Laryngoscopes (LED)

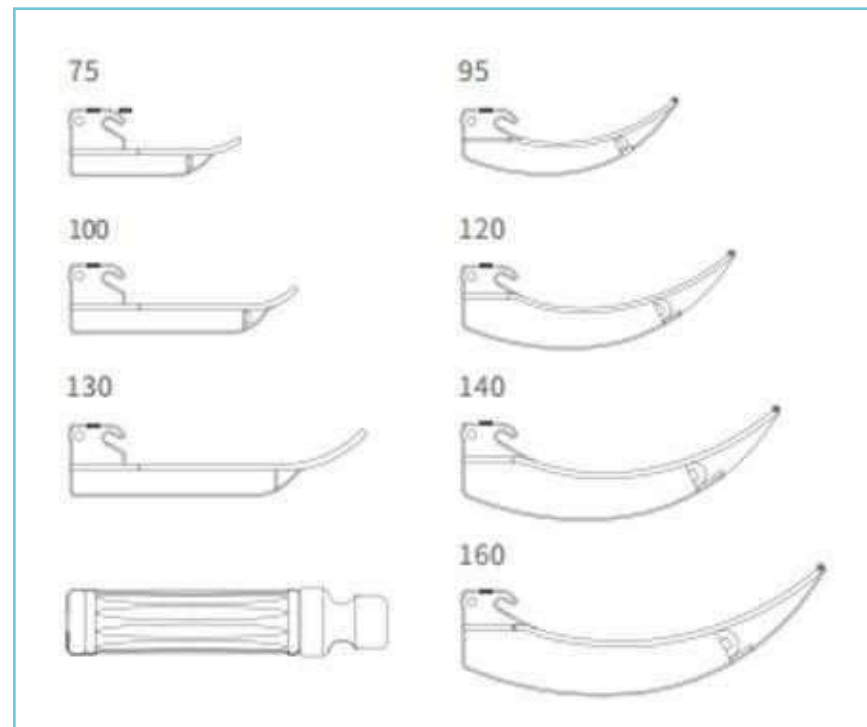

LED		
Description		NO.
LED	Curved 95mm	HJZA95
LED	Curved 120mm	HJZA120
LED	Curved 140mm	HJZA140
LED	Curved 160mm	HJZA160
LED	Straight 75mm	HJZB75
LED	Straight 100mm	HJZB100
LED	Straight 130mm	HJZB130
LED Handle		HJZ01

■ Disposable Laryngoscope (Fiber-optic)

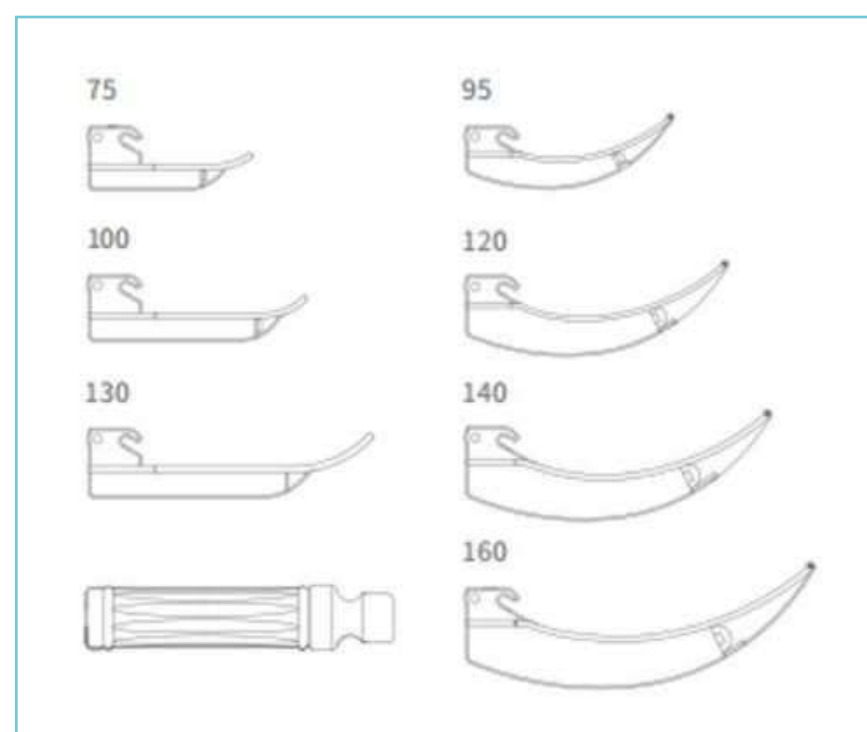

Fiber - optic		
Description		NO.
Fiber-optic	Curved 95mm	HJGA95
Fiber-optic	Curved 120mm	HJGA120
Fiber-optic	Curved 140mm	HJGA140
Fiber-optic	Curved 160mm	HJGA160
Fiber-optic	Straight 75mm	HJGB75
Fiber-optic	Straight 100mm	HJGB100
Fiber-optic	Straight 130mm	HJGBA130
Fiber-optic Handle		HJG01

■ Guedel Airways



Description		NO.	color
4#	40mm	5000004	
5#	50mm	5000005	
6#	60mm	5000006	
7#	70mm	5000007	
8#	80mm	5000008	
9#	90mm	5000009	
10#	100mm	5000010	
11#	110mm	5000011	
12#	120mm	5000012	

■ Nasopharyngeal Airway



- Slidable rings are designed to adjust depth of the tube for more comfort while also prevent tube from slipping into the nasal airway beyond the desired depth.
- Thickened flange and trumpet flange are designed to prevent tube slipping into the nasal airway.

■ Laryngeal Mask Airways



Silicone Laryngeal Mask Airways			PVC Laryngeal Mask Airways		
Description	Standard NO.	Reinforced NO.	Description	Standard NO.	Reinforced NO.
ID 1.0mm	5300010	5301010	ID 1.0mm	5310010	5311010
ID 1.5mm	5300015	5301015	ID 1.5mm	5310015	5311015
ID 2.0mm	5300020	5301020	ID 2.0mm	5310020	5311020
ID 2.5mm	5300025	5301025	ID 2.5mm	5310025	5311025
ID 3.0mm	5300030	5301030	ID 3.0mm	5310030	5311030
ID 4.0mm	5300040	5301040	ID 4.0mm	5310040	5311040
ID 5.0mm	5300050	5301050	ID 5.0mm	5310050	5311050

■ Endotracheal Tube Fixer



Description	NO.
4.0mm	5100040

Endotracheal Tube



- Available with cuff and without cuff.
- DEHP-free, high bio-safety.
- Cuffed tube with high volume and low pressure, less compression for airway.
- Standard outer conical joint.

Reinforced Endotracheal Tube



- Built-in stainless steel spring with the feature of anti-kinking.
- The tube body more flexible, easy to be reshaped. DEHP-free, higher bio-safety.
- Cuffed tube with high volume and low pressure, less compression for airway.
- Black mark easy to operate.



Oral Endotracheal tube CUFF						Oral Endotracheal tube UNCUFF					
SIZE	CAT. NO	CAT. NO (REINFORCED)	SIZE	CAT. NO	CAT. NO (REINFORCED)	SIZE	CAT. NO	CAT. NO (REINFORCED)	SIZE	CAT. NO	CAT. NO (REINFORCED)
2.0	-	-	6.5	OET0065	OET0065	2.0	-	-	6.5	OET1065	OET1065
2.5	OET0025	OET0025	7.0	OET0070	OET0070	2.5	OET1025	OET1025	7.0	OET1070	OET1070
3.0	OET0030	OET0030	7.5	OET0075	OET0075	3.0	OET1030	OET1030	7.5	OET1075	OET1075
3.5	OET0035	OET0035	8.0	OET0080	OET0080	3.5	OET1035	OET1035	8.0	OET1080	OET1080
4.0	OET0040	OET0040	8.5	OET0085	OET0085	4.0	OET1040	OET1040	8.5	OET1085	OET1085
4.5	OET0045	OET0045	9.0	OET0090	OET0090	4.5	OET1045	OET1045	9.0	OET1090	OET1090
5.0	OET0050	OET0050	9.5	-	-	5.0	OET1050	OET1050	9.5	-	-
5.5	OET0055	OET0055	10.0	-	-	5.5	OET1055	OET1055	10.0	-	-
6.0	OET0060	OET0060	10.5	-	-	6.0	OET1060	OET1060	10.5	-	-



Nasal Endotracheal tube CUFF						Nasal Endotracheal tube UNCUFF					
SIZE	CAT. NO	CAT. NO (REINFORCED)	SIZE	CAT. NO	CAT. NO (REINFORCED)	SIZE	CAT. NO	CAT. NO (REINFORCED)	SIZE	CAT. NO	CAT. NO (REINFORCED)
2.0	-	-	6.5	NET0065	NET0065	2.0	-	-	6.5	NET1065	NET1065
2.5	NET0025	NET0025	7.0	NET0070	NET0070	2.5	NET1025	NET1025	7.0	NET1070	NET1070
3.0	NET0030	NET0030	7.5	NET0075	NET0075	3.0	NET1030	NET1030	7.5	NET1075	NET1075
3.5	NET0035	NET0035	8.0	NET0080	NET0080	3.5	NET1035	NET1035	8.0	NET1080	NET1080
4.0	NET0040	NET0040	8.5	NET0085	NET0085	4.0	NET1040	NET1040	8.5	NET1085	NET1085
4.5	NET0045	NET0045	9.0	NET0090	NET0090	4.5	NET1045	NET1045	9.0	NET1090	NET1090
5.0	NET0050	NET0050	9.5	-	-	5.0	NET1050	NET1050	9.5	-	-
5.5	NET0055	NET0055	10.0	-	-	5.5	NET1055	NET1055	10.0	-	-
6.0	NET0060	NET0060	10.5	-	-	6.0	NET1060	NET1060	10.5	-	-

Injectable Endotracheal Tube



- Made of medical grade PVC and latex free.
- With injection port.


Injectable			
SIZE	CAT. NO	SIZE	CAT. NO
6.0	IET060	7.5	IET075
6.5	IET065	8.0	IET080
7.0	IET070		

Supraglottic & Subglottic Injectable Endotracheal Tube




- Two injectable devices on supraglottic and subglottic area. Different drugs could be injected and sprayed via four holes to reduce adverse reaction for patients.
- Unique designed injectable device makes the drug in the shape of mist to spray on the respiratory mucosa through the holes and makes the drug distribution wide, safe and effective.

■ Suction Endotracheal Tube

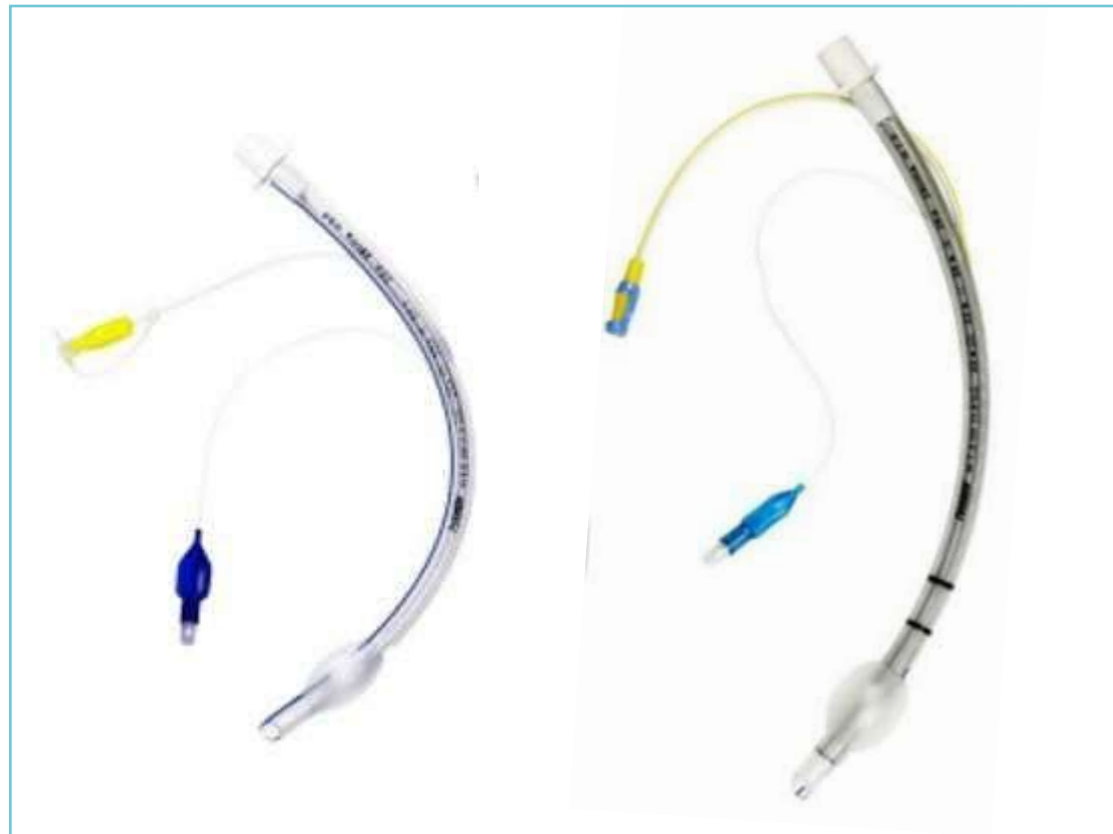

- Can do suction of subglottic secretions in the case of continuous ventilation, reducing the effect of exogenous infection and incidence of VAP

■ Suction Endotracheal Tube

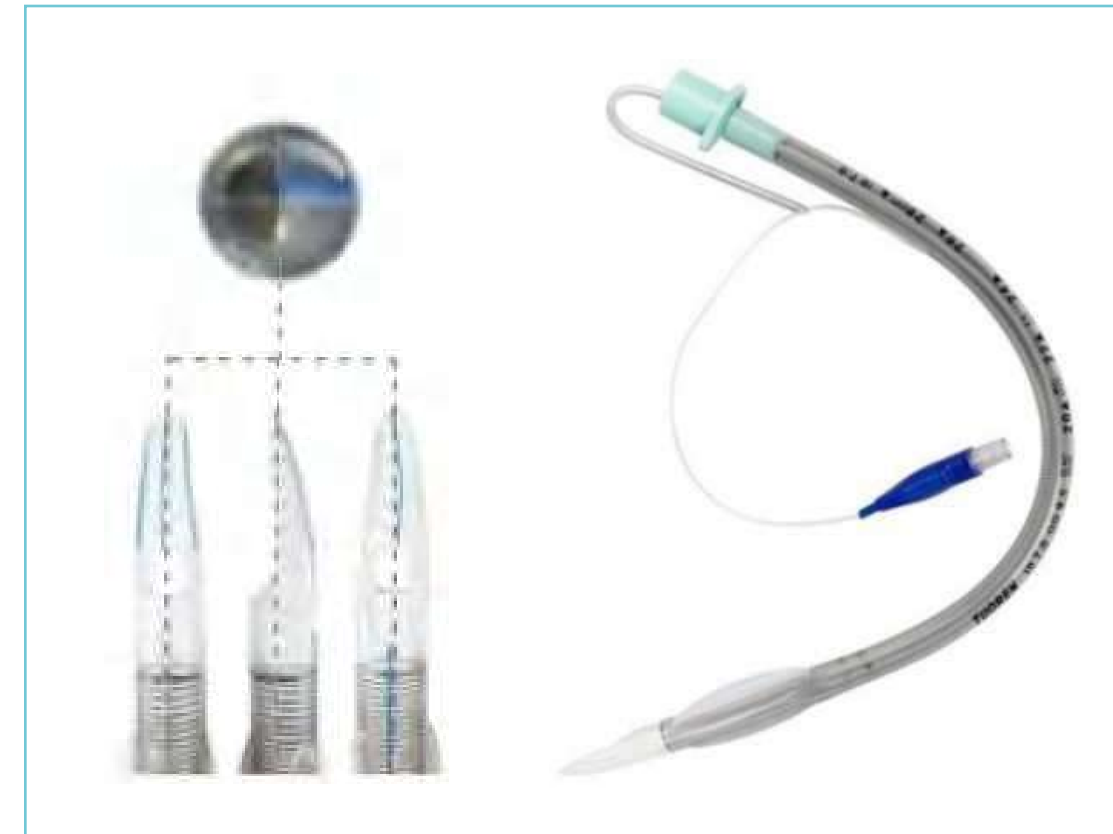

- High success rate for blind endotracheal intubation.
- Special soft flexible tip combined with tracheal tube stylet can reduced tracheal wall trauma and subglottic mucosal lesion.
- The olive-shape cuff can reduce the tracheal tube trauma.

■ Adaptive-cuff Endotracheal Tube



- The cuff can expand and shrink intermittently with the patient's respiratory frequency, avoiding damage caused by ischemia of airway mucosa.
- Eliminate complication caused by improper cuff pressure and solve the problem of air leakage.

■ Lubricious Coating Endotracheal Tube




- Lubricious coating technology are used to form a lubricating film.
- It can reduce the friction damage to the airway mucosa during intubation and extubation.
- DEHP-free, higher bio-safety.

■ Intubating Stylet



- Combined with endotracheal tube during operation.
- Endotracheal tube with stylet more easily to be shaped and aim at glottis accurately.

■ Bougie

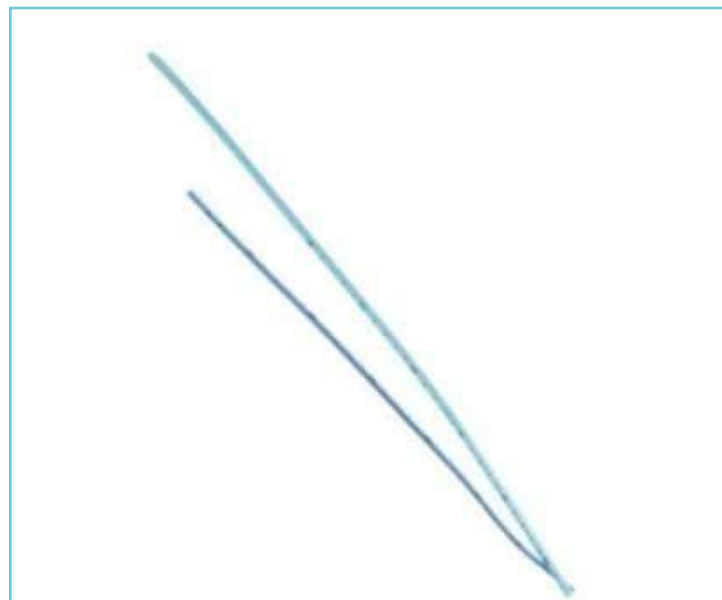

- Atraumatic tip to minimize damage.
- Used for the replacement between 2 endotracheal tubes and between endobronchial tube and endotracheal tube.

■ Endobronchial Tube - Double Lumen Endobronchial Tube



- Build unilateral or bilateral artificial airway.
- Equipped with multi-function connector, convenient to manage ventilation.
- T-joint special for connector fixed type instead of the multifunction connector, makes it more convenient to manage unilateral pulmonary ventilation.

■ Single Lumen Endobronchial Tube



- Its outside diameter is similar to ordinary ET tube, convenient to be placed, low damage.
- Adjust unilateral and bilateral pulmonary ventilation through cuff inflated and deflated.
- Drainage function can help the drainage, exhaust and restoration of the lung in the affected side.

■ Tracheotomy Tube



- Available with cuff and without cuff.
- To establish artificial respiration channel.
- The curve of the tube conforms to anatomy.
- The patient-end of the stylet is bullet-shape, convenient for inserting into the incision.
- Movable connecting ring embedded for good compliance.

■ Reinforced Tracheotomy Tube



- Available with cuff and without cuff.
- Built-in stainless steel spring with the feature of anti-kinking.
- To establish artificial respiration channel.
- The patient-end is soft and reduces the damage to the airway.

Double-cuff Tracheotomy Tube



- Two cuffs can be used alternatively reduce the damage to the airway.
- DEHP-free, higher bio-safety.
- Cuff with high volume and low pressure has less compression for the airway.

Extended-length Tracheotomy Tube



- Elongated tube body can be used in obese patient.
- It can be lengthened for 2-2.5cm longer tubes.

Tracheotomy Tube with Suction Lumen



- The radian of the tube is highly coincide with human anatomical structure.
- Suck secretions while ventilation, which is simple, convenient and safe.
- Sustained by stainless spring to reduce the twist risk and resist kinking.

Percutaneous Dilation Tracheotomy Tube



- Soft and transparent wings are comfortable to wear and easy to clean.
- Cuff with high volume and low pressure reduces the damage to airway mucosa.
- Hollow channel can match with guide wire, reducing the damage to airway and easy for insertion.

Tracheotomy Tube with Inner Cannula

- Made of medical thermal sensitive material. Soften when meeting heat, so patient has small foreign body sensation.
- Convenient to exchange and disinfect, reducing infection risk.
- Bullet-like patient end of the stylet makes it convenient to guide the tube into airway and avoid foreign body obstructing tube body.



■ Blockbuster Laryngeal Mask & ETT & Exchanger



- Two cuffs can be used alternatively reduce the damage to the airway.
- DEHP-free, higher bio-safety.
- Cuff with high volume and low pressure has less compression for the airway.

■ Laryngeal Mask



- Muscle relaxant is not required.
- Reduce the complications during perioperative period.
- Silicone material has the feature of good biocompatibility and protects the airway.
- Aperture bars designed in case of the poor ventilation caused by epiglottis folding.
- Good compliance and special manufacturing process make it soft, smooth and flexible.
- Good sealability.

■ Reinforced Type



- Reinforced tube body with the features of flexibility and antikinking.
- Eliminate the risk of airway tube occlusion.
- Reduce the complications during perioperative period.
- Silicone material has good biocompatibility and protects the airway.
- Good sealability.

■ Esophagus Drainage Type



- Independent esophageal drainage cavity to reduce the risk of aspiration.
- Reinforced tube body with good flexibility and anti-kinking.
- Bite block prevents the tube from being bitten and keeps the ventilation of airway.
- Silicone material has good biocompatibility and protects the airway.

■ PVC Type Laryngeal Mask



■ PVC/ Silicone Manual Resuscitator



- Suitable for cardiopulmonary resuscitation and first aid of artificial respiration.
- The pressure relief valve can reduce the damage of gas shock to the pulmonary of the patient.
- Complete configuration, the connector can be reused after high temperature or immersion disinfection.

Nasopharyngeal airway



- Insert through nasal cavity and the insertion depth is adjustable.
- Relieve the obstruction of pharynx tissue or organs to glottis and assist in supplying oxygen.
- Assist in attracting the pharyngeal secretions and ensure the upper airway open.

Bite Block



- Prevent the patient from biting the catheter in the mouth.
- Assist in attracting oropharyngeal secretions.
- Assist in inserting oropharyngeal or gastric catheter.
- Made of ABS material.

Catheter Mount



NASOGASTRIC FEEDING TUBE



- Disposable nasogastric feeding tube is a special tube that carries nutrition and medicine to the stomach through the nose.
- It is made of medical grade PU with excellent biocompatibility.



Prevention of Aspiration Type



Stylet Type



Disposable Three Cavities Stomach Tube



- It is very soft and has a good biocompatibility.
- It can solve problem of blocking and reduce labor intensity of medical staffs.
- It can prevent the gastric mucosa from injuring.
- The X-ray can't penetrate the three-cavity stomach tube, and the side of the gravity type can develop under the B-mode ultrasound.

Silicone Gastrostomy Tube



- Made of 100% medical grade silicone, the tube is soft and clear, as well as good biocompatibility.
- Ultra-short catheter design, the balloon can be close to the stomach wall, good elasticity, good flexibility, and reduce stomach trauma.
- The multi-function connector can be used with a variety of connecting tubes to inject nutrients such as nutrient solution and diet, making the clinical treatment more easily and quickly.

Closed suction system



- Available for 24Hour and 72Hours for all sizes Patent control switch, a "click" sound when fully turn on and turn off the switch.
- Catheter with soft tip and side holes.
- Color depth indicator.
- Dual swivel connector.

Disposable Rotatable Biopsy Forceps



直径(mm) Diameter	长度(mm) Length	特征 Features
1.8	1000	不包塑 uncoated
1.8	1200	不包塑 uncoated
1.8	1200	包塑 coated
1.8	1600	包塑 coated
2.3	1600	不包塑 uncoated
2.3	1800	不包塑 uncoated
2.3	1800	包塑 coated
2.3	2300	包塑 coated


Hemoclips



Intended use

The product is used to placing the clip in digestive tract with endoscope ,for the treatment of upper and down gastrointestinal bleeding which is caused by various reasons .

Synchronous rotation,
accurately focus of the infection

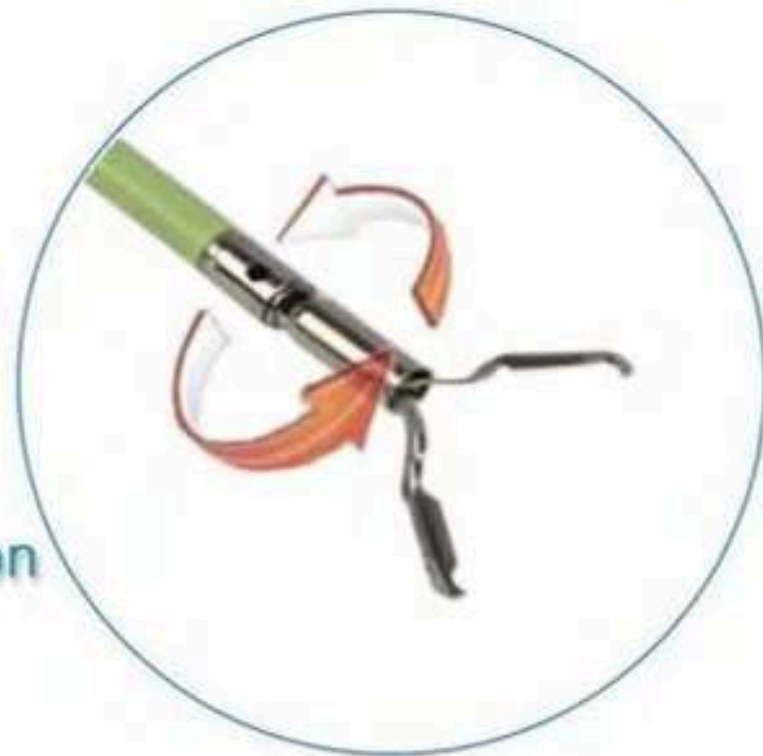

旋转 Rotate	长度(mm) Length	间距(mm) Span	夹角(°) Class angle
可旋转 Rotatable	1650	9	90
	1950	11	90
	2300	13	135
	2700	16	135
不可旋转 Non Rotatable	1650	9	90
	1950	11	90
	2300	13	135
	2700	16	135

Disposable endoscopic injection needle



Intended use

The product is used in combination with endoscope for the injection of submucosa in digestive tract

Product features

Unique cutting surface design of the needle, sharp point, easy to puncture.




外径(mm) Diameter of outer tube	针管直径(mm) Diameter of needle tube	针管有效长度(mm) Length of needle tube	外管有效长度 (mm) Length of outer tube
2.3	0.8	4	1200
2.3	0.6	5	1600
2.3	0.5	6	1800
1.8	0.8	7	2000
1.8	0.6	7	2300
1.8	0.5	8	2500

■ Disposable hot polyp snare



圈套形状	外径直径 (mm)	内径直径 (mm)	套圈长度 (mm)
椭圆形	2.4	400	10
	2.4	700	15
	2.4	1000	20
	2.4	1200	25
六角形	2.4	1400	30
	1.8	1400	35
	1.8	2000	35
	1.8	2500	35
	1.8	3000	45

■ Hot biopsy forceps

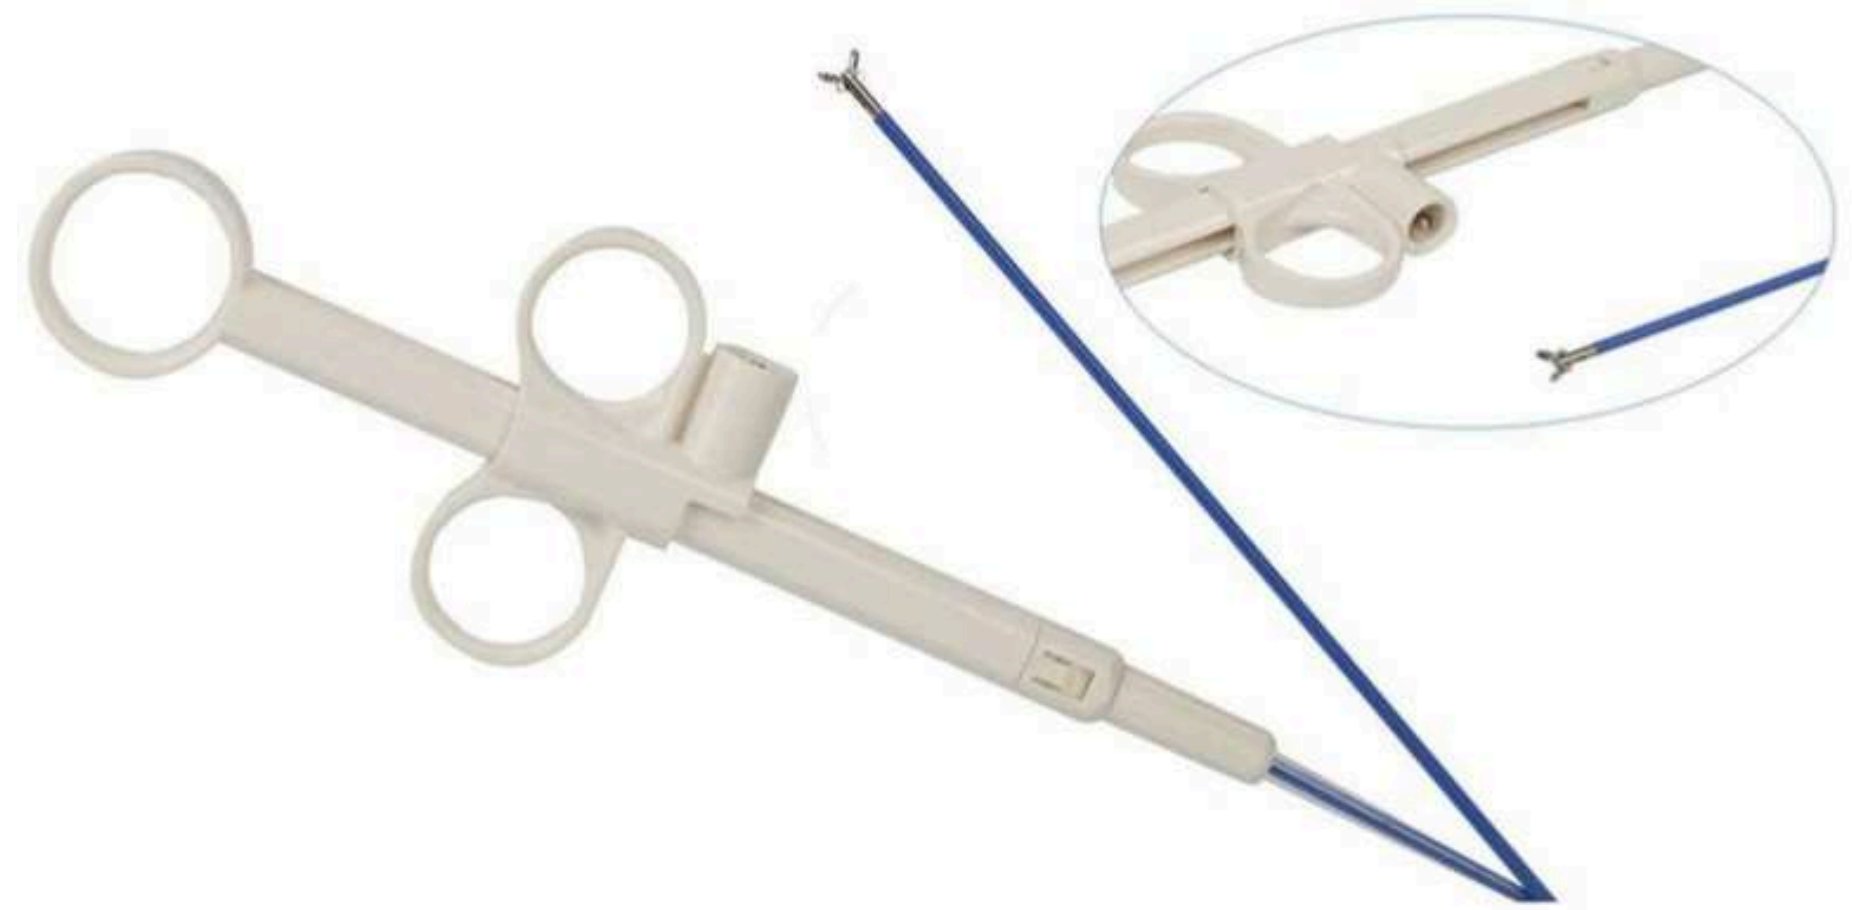

Intended use

- Used in endoscopic surgery for routine cutting of human tissues and blood coagulation.

Produce features

- Coated with insulating material ,easy and smooth to pass through the endoscope channel.
- Can pass through a curved endoscope channel by the internal flexible connection.
- The bite of the jaws is firm and not easy to fall off.
- Good cutting performance

■ Stomach Tube



- Made of soft and flexible PVC, resistant to bending and twist;
- Atraumatic, slightly rounded, open tip;
- Tip with four alternating side holes with soft rounded edges;
- Integrated stopper allows the tube to be closed tightly;
- Color coding system for size, X-ray line optional; Single-use, E.O. sterilized;
- Individual packaging: PE, Blister, Paper-foil;

■ Feeding Tube



- Made of soft and flexible PVC, resistant to bending and twist;
- Atraumatic, slightly rounded, open tip;
- Tip with two alternating side holes with soft rounded edges;
- Integrated stopper allows the tube to be closed tightly;
- Color coding system for size, X-ray line optional;
- Single-use, E.O. sterilized; Individual packaging: PE, Blister, Paper-foil;

■ Rectal Tube



- Made of soft and flexible PVC, resistant to bending and twist;
- Atraumatic, slightly rounded, open tip;
- Tip with two alternating side holes with soft rounded edges;
- Color coding system for size, X-ray line optional;
- Single-use, E.O. sterilized; Individual packaging: PE, Blister, Paper-foil;

■ Stomach Tube with Guide Wire



- Made of medical grade polyurethane
- X-ray opaque line throughout the length
- With straight guide wire
- Open distal end with 2 side holes
- Closed distal end is available
- Available with different length

■ Silicone Stomach Tube



- Made of 100% medical grade silicone
- X-ray opaque line throughout the length
- Open distal end with 4 side holes
- Markings from the distal end every 5 cm
- Available with different length
- Transparent cap-cone connector

■ Suction Toothbrush for oral Hygiene




- is mainly designed for sputum suctioning and oral hygiene aid to the patients who are bed-ridden, in coma, abrosia, or suffering mechanical ventilation
- can lower the pulmonary infection and prevent ventilator-associated pneumonia (VAP) through effective oral hygiene and suction

Biliary and Pancreatic Plastic Stent



- Used for endoscopic retrograde biliary drainage.

Endoscopic Gastrointestinal Polypectomy Snares

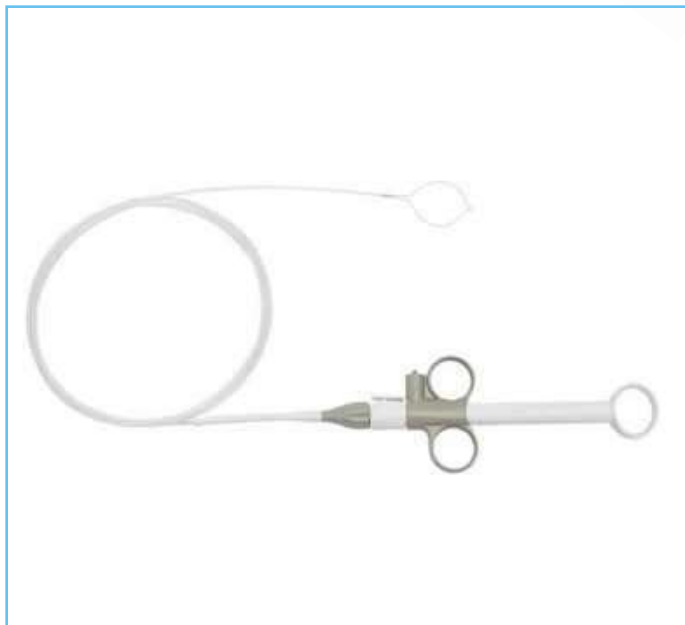


- Removal of polyps or other excess tissues in the digestive tract used with diathermic energy.
- Handle supports synchronous rotation with the snares, high synchronization rate, good control performance.
- Product model diversification, meet different clinical needs.
- The head snares are made of imported special stainless steel wire, which has good toughness and high strength

Gastrointestinal Nutrition Bag Infusion Set



A full range of enteral feeding sets designed to cover all healthcare professionals' requirements and to improve patient safety and comfort. The range includes feeding sets with or without bag, three types of bagged or bottled nutrient solution adapters.

Endoscopic Accessories Injection Sclerotherapy Needle

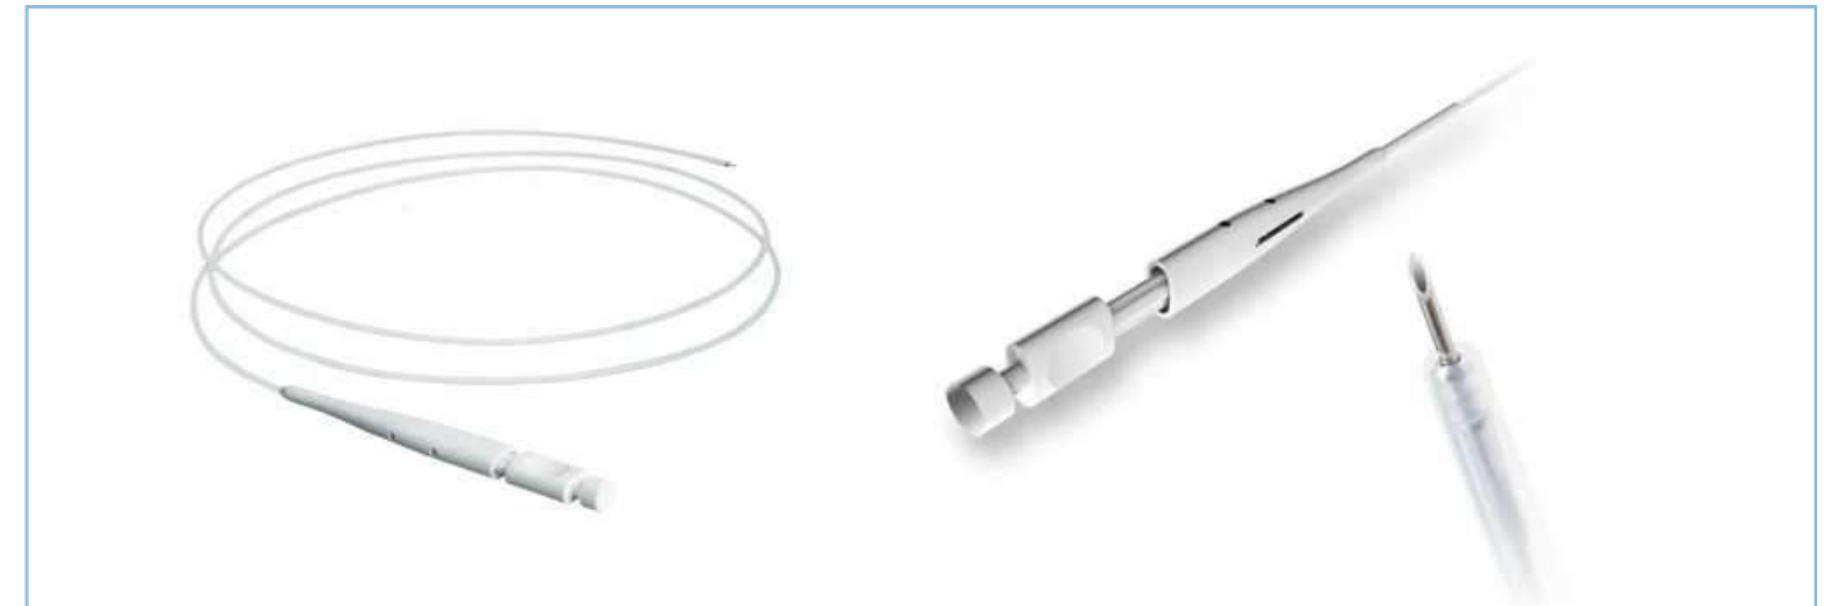

PVC Tube Professional Feeding Bag



- Bag type, with built-in hangers and a large top fill opening with leak-proof cap.
- With medical grade PVC
- With adapter with ENPlus spike or with universal bottled adapter available

Rubber Mouth Prop Bite Block



- Comfortable and flexible plastic, resistant to high temperature 134 degree.
- Ideal for opening the upper and lower arch, convenient for operating.
- L, M, S type for different patients.

■ Biliary and Pancreatic Plastic Stent



- Accurate and consistent real-time invasive blood pressure measurement
- Compatible with wide range of monitors
- Clear fluid pathway enables priming during monitoring
- Versatile and easy to use Snap-Tab flush device

■ Coronary Stent System For Cardiac Surgery



- Sirolimus-Eluting Coronary Stent System
- 100% biodegradable PLGA Coating
- Controlled drug release for continuous effect
- A Value - Added DES

■ Coronary PTCA Balloon Dilatation Catheter



- "Seamless" force conduction technology ensures enough push ability.
- Delicate "M-advance" tip design makes the catheter the catheter softer and more flexible to protect the blood vessels

■ Medical Protective Full-Face Mask

- Better Clearance Rate and Safer High-flux Dialyzer, PC series and PP series are available, Provide high efficient and full-spectrum solution to filter all types of molecules in dialysis therapy



■ Hemostasis Valve Sets

- Various types to meet the clinician's habits .
- Pressure resistance and good sealing valve to reduce the blood loss.



■ Medical Protective Full-Face Mask

- Large inner diameter for high flow rate of contrast media.
- Flexible material have excellent support and shape memory.
- Braided catheter construction allows for good torqueability and excellent kink resistant capacity.
- Soft tip will protect vessel from damage.



■ Blood Bag (Single)

- Bag capacity: 250ml, 350ml, 450ml, 500ml;
- Anticoagulant: CPDA-1;
- PVC bag: roll-welded / blow-extruded;
- Donor needle: 16G / 17G;
- Sampling device (optional);
- Leukocyte filter (optional);



■ Blood Bag (Double)



- Anticoagulant: CPDA-1;
- PVC bag: roll-welded / blow-extruded;
- Donor needle: 16G / 17G;
- Sampling device (optional);
- Leukocyte filter (optional);

- 250ml(primary, with cpda-1)+100-200ml(satellite, empty);
- 350ml(primary, with cpda-1)+200-300ml(satellite, empty);
- 450ml(primary, with cpda-1)+300-400ml(satellite, empty);
- 500ml(primary, with cpda-1)+300-400ml(satellite, empty);

■ Blood Bag (Triple)



- Anticoagulant: CPDA-1 / CPD&SAGM;
- PVC bag: roll-welded / blow-extruded;
- Donor needle: 16G / 17G;
- Sampling device (optional);
- Leukocyte filter (optional);

- 250ml(primary, with cpda-1)+2x100-200ml(satellite, empty);
- 350ml(primary, with cpda-1)+2x200-300ml(satellite, empty);
- 450ml(primary, with cpda-1)+2x300-400ml(satellite, empty);
- 500ml(primary, with cpda-1)+2x300-400ml(satellite, empty);
- 250ml(primary, with cpd)+100-200ml(satellite, with sagm)+100-200ml(satellite, empty);
- 350ml(primary, with cpd)+200-300ml(satellite, with sagm)+200-300ml(satellite, empty);
- 450ml(primary, with cpd)+300-400ml(satellite, with sagm)+300-400ml(satellite, empty);
- 500ml(primary, with cpd)+300-400ml(satellite, with sagm)+300-400ml(satellite, empty);

■ Blood Bag (Quadruple)



- Anticoagulant: CPDA-1 / CPD&SAGM;
- PVC bag: roll-welded / blow-extruded;
- Donor needle: 16G / 17G;
- Sampling device (optional);
- Leukocyte filter (optional);

- 250ml(primary, with CPDA-1)+3x100-200ml(satellite, empty);
- 350ml(primary, with CPDA-1)+3x200-300ml(satellite, empty);
- 450ml(primary, with CPDA-1)+3x300-400ml(satellite, empty);
- 500ml(primary, with CPDA-1)+3x300-400ml(satellite, empty);
- 250ml(primary, with CPD)+100-200ml(satellite, with SAGM)+2x100-200ml(satellite, empty);
- 350ml(primary, with CPD)+200-300ml(satellite, with SAGM)+ 2x200-300ml(satellite, empty);
- 450ml(primary, with CPD)+300-400ml(satellite, with SAGM)+2x300-400ml(satellite, empty);
- 500ml(primary, with CPD)+300-400ml(satellite, with SAGM)+ 2x300-400ml(satellite, empty);

■ Transradial Introducer Sets



- Perform diagnostic and interventional procedures without upsizing to a larger sheath
- Optimal radial access, especially in women with smaller radial arteries
- Less penetration resistance than conventional sheaths

■ Pressure Bandage



- Easy to fix without displacement
- Ensuring normal venous blood circulation
- Easy for observation and adjust the pressure

■ Peelable Introducer Sets



- Lower insertion forces during placement into vasculature;
- Reduced drug on catheter during placement during the sheath;
- Convenient diator to sheath interlock
- We can supply kink resistance nitinol guide wire to increase clinician confidence

■ Percutaneous Access Set



- Used for single-puncture percutaneous access to facilitate placement of a working wire guide for drainage procedures.
- The transitionless tip is design requires less insertion force and virtually eliminates hang-ups during entries.
- The entire shaft and distal tip are radiopaque to maximize visibility during placement.

■ Haemodialyser



- High capability of toxic clearance.
- Excellent Biocompatibility.
- Higher performance of small and medium size removal.
- Lower loss of Albumin.

■ Long Term Hemodialysis Catheter



- The Catheter is made from premium silicone, which has excellent biocompatibility.
- The dacron cuff can protect immigration of catheter and reduce the chance of CRBI (Catheter Related Bloodstream Infections).
- The silicone material makes catheter more floppy, hence it can minimize the trauma to the vein and reduce the incident of clot.

■ Haemodialysis Catheter



- The latex-free material provides excellent safety;
- Catheters made of high quality TPU and transparent silicone extension tube;
- Single/double/triple lumen are all available;
- Precurved catheter, straight catheter and curved extension tube are all available;

■ Latex Foley Catheter




- Made of medical-grade latex.
- Perfectly finished side eyes and closed distal for efficient drainage while with less hurt to mucous membrane.
- Smooth hydrophilic coating greatly facilitates patients use.

■ PVC Foley Catheter



- Made of medical-grade pvc.
- Perfectly finished side eyes and closed distal for efficient drainage while with less hurt to mucous membrane.
- Smooth hydrophilic coating greatly facilitates patients use.

■ Red Rubber Foley Catheter

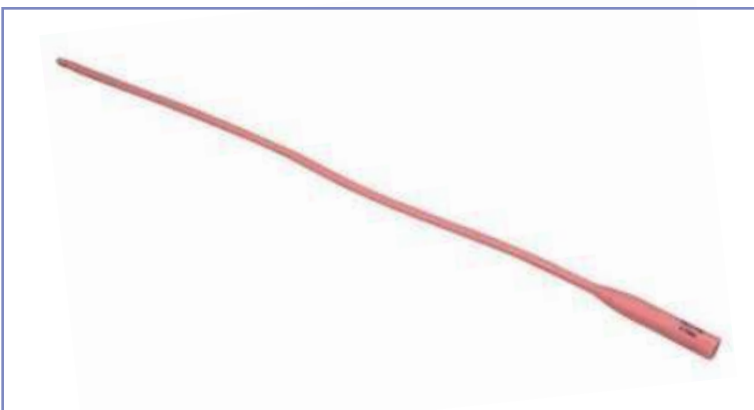

- Made of medical grade red latex.
- One-way design for temporary urine drainage.
- Silicone coating for less irritation.

■ Latex Foley Catheter with mushroom head



- Made of medical grade siliconized latex.
- Be used for temporary drainage of bladder or kidney.
- With funnel end.
- Mushroom shaped tips for catheter retention.
- Special designed distal holes for better drainage of liquid or blood clots.

■ Silicone Foley Catheter



- Made of 100% silicone.
- Prevent urine reflux from irrigation lumen, minimize cross contamination.
- Better connection with syringe when doing bladder irrigation/flushing.

■ Sky blue color silicone foley catheter



- Made of 100% silicone.
- Better biocompatibility and less irritation.
- Special "anti-blockage" technology enables barrier-free catheterization.
- Special sky blue design, outstanding & elegant.
- Central positioned high performance balloon.
- X-ray detectable line throughout the tube body.

■ Silicone foley catheter with temperature sensor



- Made of 100% medical grade silicone.
- For patient body temperature monitoring and recording.
- Available with long term placement.
- Temperature extension cable available for different indication.

■ Hydrophilic nelaton catheter with water sachet



- The hydrophilic intermittent nelaton catheter come with an in-pack water sachet which provides smooth insertion and removal for obtaining a more comfortable.
- catheterization experience and causing less hurt to mucous membrane and improving safety.

■ Silicone /Latex Male External Catheter



- Position over tip of penis then unroll the latex sleeve over entire length.
- affix distal end to drainage.
- Sterilized by ethylene oxide gas.
- Use adhesive strap around top of sleeve to secure to penis avoiding constriction.
- Material: medical grade latex or silicone.

■ Foley catheter holder



- Be suitable for both silicone foley catheter and latex foley catheter.
- Fix foley catheter to patient's leg to enable moving freely.
- With velcro to fix tightly.
- Less skin irritation and hurt, be made of comfortable material for skin friendly design.
- Prevent moving or dislocation by velcro to fix tightly.

■ Urine bag



Push-pull Valve



T-Valve Urine Bag



Precision Urine Bag



Multifunctional Urine Bag



Spiral Valve Urine Bag



Paediatric Urine Bag



Spiral Valve Leg Urine Bag



T-Valve Leg Urine Bag



Injection Precision Urine Bag



Urine Bag with streamers

Other Bag



stool bag



Self-standing Collection Bag



Waste liquid bag type Y



Waste liquid bag type L

Silicone Foley Catheter



One-system Colostomy Bag (Open)



One-system Colostomy Bag (Closed)



One-system Colostomy Bag
(Closed, Mini)



Two-system Colostomy Bag
(Open, Clip-in Type)



Two-system Colostomy Bag
(Open, Adhesive Type)



Two-system Colostomy Bag
(Closed, Clip-in Type)



Two-system Colostomy Bag
(Closed, Adhesive Type)



Adhesive Pan/Skin Barrier
(Hydrocolloid, Clip-in Type)



Adhesive Pan / Skin Barrier
(Hydrocolloid, Adhesive Type)



Adhesive Pan / Skin Barrier
(Hydrocolloid with Non-woven Boarder,



One-piece Urostomy Bag



Two-piece Urostomy Bag
(Clip-in Type)

Under Pads



Specifications

Name	Disposable Underpads
Size	40cmx60cm, 60x90cm, 100x80cm etc.
Certification	ISO 13485, CE, FDA
Material	tissue + PE + PP+ Wood pulp + SAP



■ Disposable Chest Drainage Catheter



- There are three cavities with this type of catheter. They are main cavity, irrigation cavity and air cavity or medicine cavity.
- The catheter can't pass through the X ray and can be seen under the B-ultrasound.
- The head of the catheter is sealed. There are many small drainage holes around the connecting catheter to prevent the regenerated tissue get in and make sure the smooth drainage and security of extubation.

■ Disposable Chest Drainage Catheter (Pig Tail)



- There is a lateral cavity with this type of catheter. It can make irrigation and draining conveniently.
- The catheter can't pass through the X ray and can be seen under the B-ultrasound.
- The design of pigtail head can prevent adhering the catheter and blocking, and there are many drainage holes inside the pigtail so that it can drain the liquid smoothly.
- The fixed device helps the fixing of the catheter and the puncture site.



- There is a lateral cavity with this type of catheter. It can make swelling and draining conveniently.
- The catheter can't pass through the X ray and can be seen under the B-ultrasound.
- The design of pigtail head can prevent adhering the catheter and blocking, and there are many drainage holes inside the pigtail so that it can drain the liquid smoothly.
- The catheter is made of harder material. It helps the puncture needle to get in and out conveniently.

■ Disposable Chest Drainage Catheter (Pig Tail)



- There is a string to strengthen the pigtail.
- The catheter can't pass through the X ray and can be seen under the B-ultrasound.
- The pigtail catheter can prevent adhering the catheter and blocking, and there are many drainage holes inside the pigtail so that it can drain the liquid smoothly.
- The catheter is made of harder material. It helps the puncture needle to get in and out conveniently.

Wound Drainage System/Reservoir



- Superior biocompatibility, flexibility and great comfort to patient, which delivers extremely low tissue response to patient, which delivers extremely low tissue response to wound, which minimize possible tissue adhesion.
- Universal stepped adapter allows connecting to kinds of suction tube
- Embedded X-ray thread enables easy detection and position of suction tube
- Autoraumatic tip less pain of patient

Silicone Closed Wound Drainage Kit



- Made of 100% imported medical grade silicone;
- The kit contains different sizes reservoir, drainage tube and stainless steel trocar.
- Used to remove blood and excess fluid from wound, so as to prevent or minimize hematomas and eliminate dead space.
- Connectors can be equipped with drains if required.

Negative Pessure Drainager



- It is used to drain and gather the liquid in vivo.
- It is made up of Negative pressure drainager main body,connector cap,connector,connecting tube,one-way valve and spring.
- Negative pressure drainager main body and one-way valve are made of medical silicone or PVC.
- Connecting tube is made of medical silicone or PVC.
- Connector cap and connector are made of PP, PVC or ABS.
- Spring made of stainless steel.

High Negative Pressure Drainage Bottle



■ Disposable Water Seal Chest Drainage System



- During the clinical use, the negative pressure source (not included in this device) produce negative pressure and transfer the pressure into suction chamber through pressure control valve (fixed pressure) to suck the waste liquid into waste liquid chamber from patient chest via drainage catheter (not included in this device).
- The water seal (sterile water or sterile saline injected into water seal chamber by medical institutions) is used to prevent air into patient chest after drainage procedure is over.

■ Disposable Dry Seal Chest Drainage System



- The device is intended use for the drainage of traumatic pneumothorax, spontaneous pneumothorax and pleural effusion caused by various causes.
- It is more practical to use pneumatic floating ball to observe pulmonary gas leakage
- Waterless negative pressure status indicator is easy to observe

■ Disposable 3-Parts syringe



- Usage: It is used to extract the liquid and mixed medicine liquid and it is for human body injection use
- Material: High transparent medical grade PP, synthetic rubber(latex free)or natural rubber.

■ Disposable 2-Parts syringe



- Usage: It is used to extract the liquid and mixed medicine liquid and it is for human body injection use
- Material: High transparent medical grade PP(barrel),PE(plunger)

■ Disposable Hypodermic Needle



- individualpacking:Blister packing.
1,Sterilized by EO gas,non-toxic,non-pyrogenic,for single use
- Material for needles:strainless steel;
- The needles are sprayed by the silicone oil;
- Adhesive:Epoxy resin is used to fix the needle and hub; Blister pack:Medical grade gelatinized paper and plastic film;

■ Disposable Insulin Syringes



- Usage: Used in injecting insulin medicine to diabetes patients.
- Material: High transparent medical grade PP, synthetic rubber(latex free)or natural rubber.
- Features: Transparent ,bright appearance
Non-toxic, non-pyrogenic
High level sealing, smooth sliding
High-quality silicide process

■ Disposable Hypodermic Insulin Injection



- Usage: Used in hypodermic injection insulin from insulin pen.
- Material: Medical grade stainless steel SUS304, medical grade silicon
- Features: Ultra-thin needles is fixed permanently.
- Sharp tip to reduce the puncture pain
- High-quality silicide process
- Safe

■ SPINAL NEEDLE



- Unique design,type:quincke,pencil- point .
- Color coded hub by size for clear recognition.
- Used in subarachnoid puncture for spinal anesthesia .
- Completely transparent needles stand provides convenience to observe the outflow of the cerebrospinal fluid.
- The needle core with pin allows a good joint of needle edge.

■ Beauty Needle



- These bevels are designed specially shaped for enabling easy tissue penetration and minimizing trauma.
- Ultra thin wall
- Three bevels lancet point made by AISI 304 stainless steel
- Bur-free and sharp point for painless penetration
- Hard silicon coating

■ Disposable Dental Irrigation Syringe W/O Needle



- Usage: Used in cleanacertainpart in the dental operation.
- Material: High transparent medical grade PP, synthetic rubber(latex free)or natural rubber. medical grade stainless steel SUS304, medical grade silicon
- Features: Transparent ,bright appearance
Non-toxic, non-pyrogenic
High level sealing, smooth sliding
Accurate calibration

■ Disposable Dental Lightproof Syringe



- Usage: It is used to inject liquid medicine during dental surgery
- Material: High transparent medical grade PP, synthetic rubber(latex free)or natural rubber.
- Features: Lightproof
Non-toxic, non-pyrogenic
High level sealing, smooth sliding
Accuracy calibration

■ Disposable Dental Irrigation Needle & Pre-Bent Tips



- Usage: Used in cleaning the wound in dental treatment.
- Material: Medical grade stainless steel SUS304
- Features: There are three kinds of tip design the Notched, Side-vented & Double-vented. Side-vented is designed to reduce the spraying pressure to the root of tooth from the tip. Double-vented can irrigate roundly by spinning.
- Hard stiffness, anti-corrosion and stain resistance
- Accurate angle (Another folding flush needle can be bent at any angle)

■ Disposable Dental Anesthesia Needle



- Usage: Used in injecting dental anesthesia.
- Material: Medical grade stainless steel SUS304, medical grade silicon
- Hard stiffness, corrosion and stain resistance
- Accurate angle and sharp tip, painless
- High-quality silicone process Safe

■ Disposable Dental Anesthesia Needle



- Usage: Used in injecting dental anesthesia.
- Material: Medical grade stainless steel SUS304, medical grade silicon
- Hard stiffness, corrosion and stain resistance
- Accurate angle and sharp tip, painless
- High-quality silicone process Safe

■ Disposable Enteral Feeding Syringe



- Designed specifically for enteral processes.
- These processes include initial tube placement, flushing, irrigation and more.
- The connector reduces the risk of misconnections to the tubing.
- Also, the body is clear for easy measuring against the clearly marked graduated length markings.
- The clear body also permits you to visually check for air gaps.

■ Disposable Irrigation Syringe

The Feeding and Irrigation Syringe is used for Industrial Dispensing, Perfumes and Liquid Dispensing, Pet Livestock Feeding, Irrigation, Enteral Feeding and Suction use, it doesn't have needle, needleless type.



■ Disposable Beauty Embedding Threads



- The needle body uses Korean imported medical stainless steel to ensure the puncture strength of clinical use
 - With needle tip electrolysis, the needle is fast, convenient and easy to operate, and it can effectively relieve the pain of the needle.
- Accurate injection, flexible single hand operation and good safety

■ Disposable Beauty Crystal Multi 9 Pins Needles



- 100% brand new and high quality
- Convenient for use and storage
- Safe and clean
- Atrophic scar improvement
- Cheek and lip augmentation
- Mesotherapy gun beauty machine

■ Disposable Beauty Skin Rejuvenation Microneedle



- Microneedle is an innovative single use medical device, which enables a nearly painless and accurate injection into the dermis. The microneedle is made up of 3 silicone micro-cones of 0.6 mm-1.5mm, making the needle three times smaller than a normal injection needle.
- Furthermore, the needle improves patient comfort and minimizes the risk of bruising.

■ Disposable Beauty Meso Nano Needle



- The needle body uses Korean imported medical stainless steel to ensure the puncture strength of clinical use
 - With needle tip electrolysis, the needle is fast, convenient and easy to operate, and it can effectively relieve the pain of the needle.
- Accurate injection, flexible single hand operation and good safety

■ Disposable Golden Water-Soluble Needle



- Deeply hydrates and oxygenates dermis and epidermis
- Brings instant relief by reducing skin trauma post-sun exposure
- Reduces discomfort of overdried skin (roughness, itching)
- Restores the mineral and ionic balance of the skin
- Improves skin hydration from the inside out

■ Disposable Medication Can Prefilled Glass Syringe



- Borosilicate Glass Can Take the Heat
- Plastic plunger rod/ Stainless Steel Plunger
- Triple Ring Seal
- Colored Plunger (Any colors as your requests)
- Customized logo on the glass syringe

■ Disposable Spinal Needle Pencil Point Type



- Specially designed needlepoint shape causes no trauma of spinal dura mater, and automatically closes the puncture port after withdrawal of the needle to reduce the leak of cerebrospinal fluid, with the occurrence of PDPH evidently declined.
- Proper shape and position of the side hole maintains adequate flow and reduces imperfect retardations as well.

■ Disposable Epidural Needle




- Bend and round head helps to reduce largely the risk of piercing spinal dura mater and to ensure the smooth pass of the canula.
- The needle tube is scaled for the purpose of depth control.
- The needle stand with wings is easy to hold and to perform needle insertion.

■ Disposable Biopay Needle - Aspiration Type



- The needle edge is firm and sharp.
- The positioning body may adjust the length of the needle tube.
- The needle tube is scaled for the purpose of puncture depth control.
- The optional sample tube reduces the waste of sampling.

■ Disposable Biopsy Needle - Biopsy Type

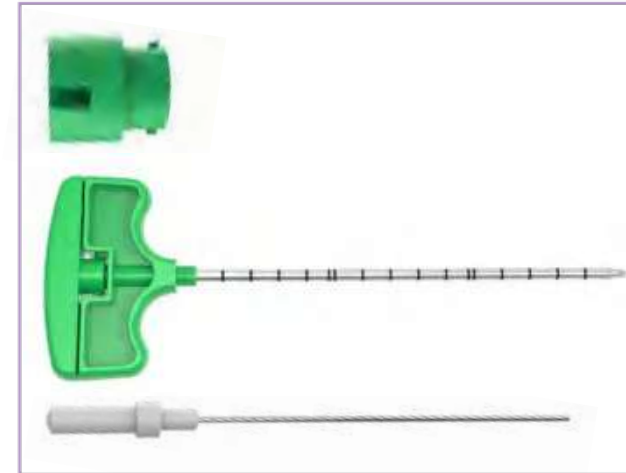

- Variety edge of the needle meets the different clinical demand.
- The optional connector of convertible may get 10mm or 15mm length of tissue biopsy.

■ Disposable RF Needle



- It is applied to clinical departments such as pain department, interventional department, oncology department, orthopedics department, rehabilitation department, spine surgery department, neurosurgery department, stomatology department, etc.
- Radiofrequency ablation is used for the treatment of pain.

■ Disposable Chiba Needle



- It is used in interventional, ultrasound, oncology, gynecology and obstetrics, prenatal diagnosis, anesthesiology, imaging, breast surgery, thyroid, liver, pancreas and spleen surgery, thoracic surgery, Urology, Radiology, minimally invasive surgery, brain surgery and other departments.
- It is used for human percutaneous puncture, sampling, cell biopsy, drainage and implantation of radioactive particles.

■ Intraosseous Access Needle



- It is used in emergency room, emergency room, intensive care room, ambulance, field first aid and other emergency environments.
- It can be used for intraosseous injection or establishment of blood vessel pathway in marrow cavity.

■ Ultrasound Needle



- It is suitable for clinical departments such as pain department, interventional department, oncology department, gynecology and obstetrics department, neurosurgery department, ultrasound department, rehabilitation department, spine surgery department, etc
- It is used for precise positioning and channel establishment in interventional and minimally invasive surgery.

■ Metal Puncture Needle



■ Ultrasound Needle




- It is suitable for clinical departments such as pain department, interventional department, oncology department, gynecology and obstetrics department, neurosurgery department, ultrasound department, rehabilitation department, spine surgery department, etc
- It is used for precise positioning and channel establishment in interventional and minimally invasive surgery.

■ Butterfly Blood Collection Needle



- Used to collect blood for testing, usually used together with vacuum tube.
- It provides fast and convenient blood multiple sampling by single puncture.
- High quality ultra-sharp needle assures atraumatic insertion and painless penetration.
- Color-coded cap and hub assure accurate and convenient gauge size identification.
- Safety sleeve for this model is available to protect sampling person from accidental hurt or crossinfection.

■ Safety syringe

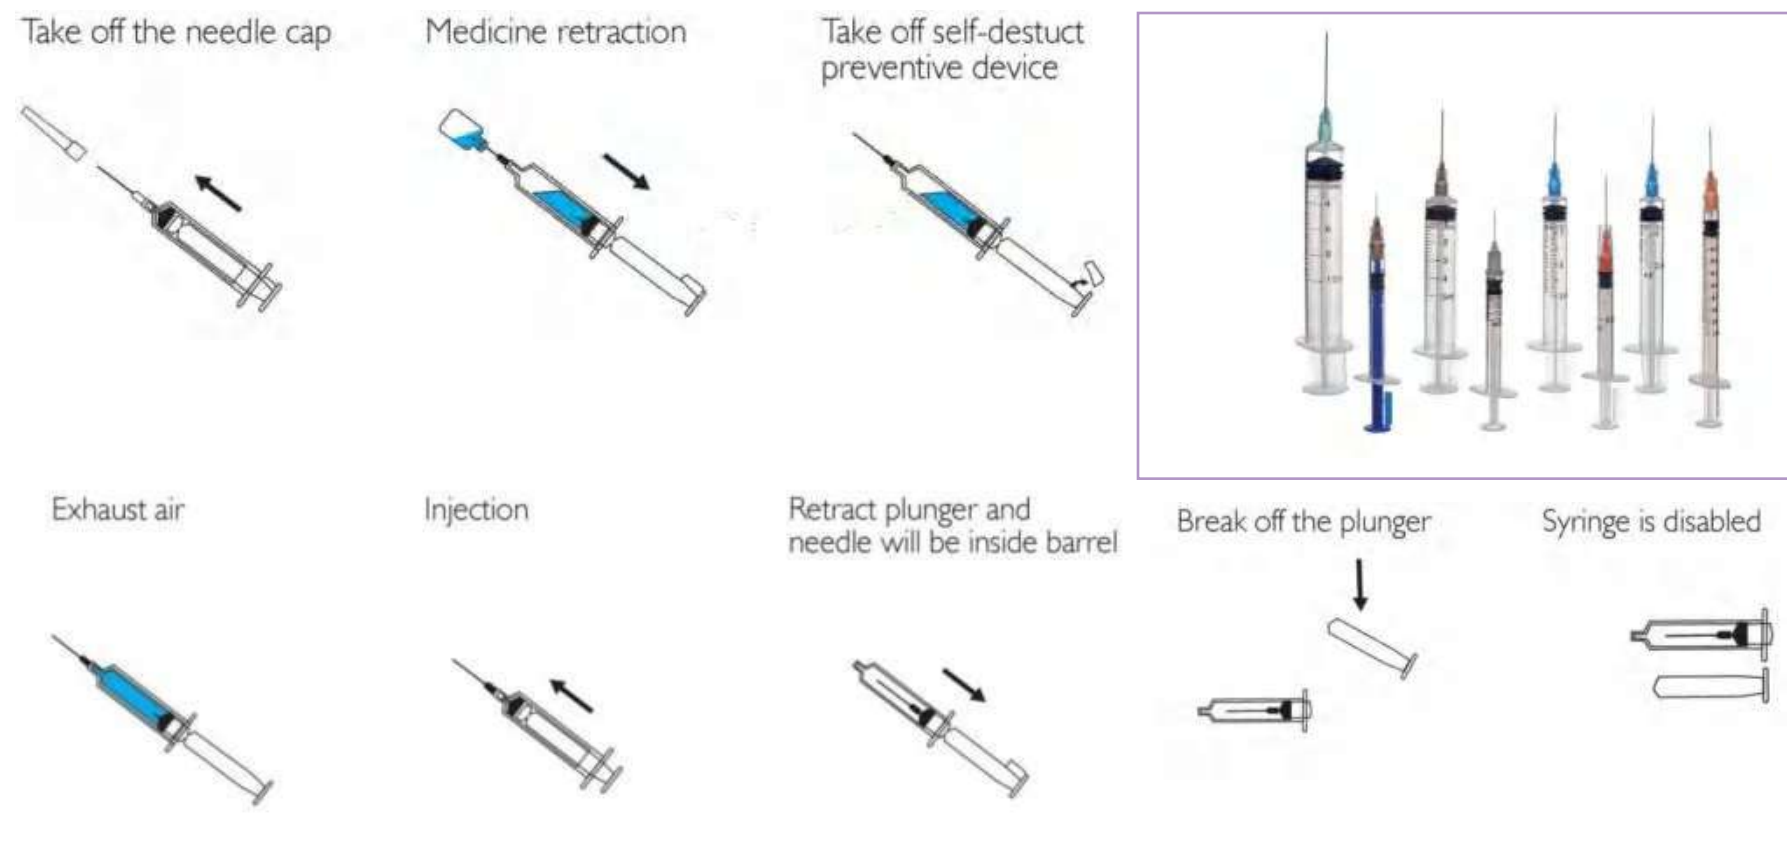

■ Dispensing syringe for single use



■ I.V. Catheter



Pen I type



Pen II type



Butterfly I type



Butterfly injection port type



Closed Y type



Butterfly II type

■ Scalp Vein Set



Pen Type Blood Collection Needle




- Made by Medical grade
- high polymer material, Sterilized by E.O, Non-toxic, aseptic and Non-Pyrogen.

Safety series



Safety Scalp Vein Set

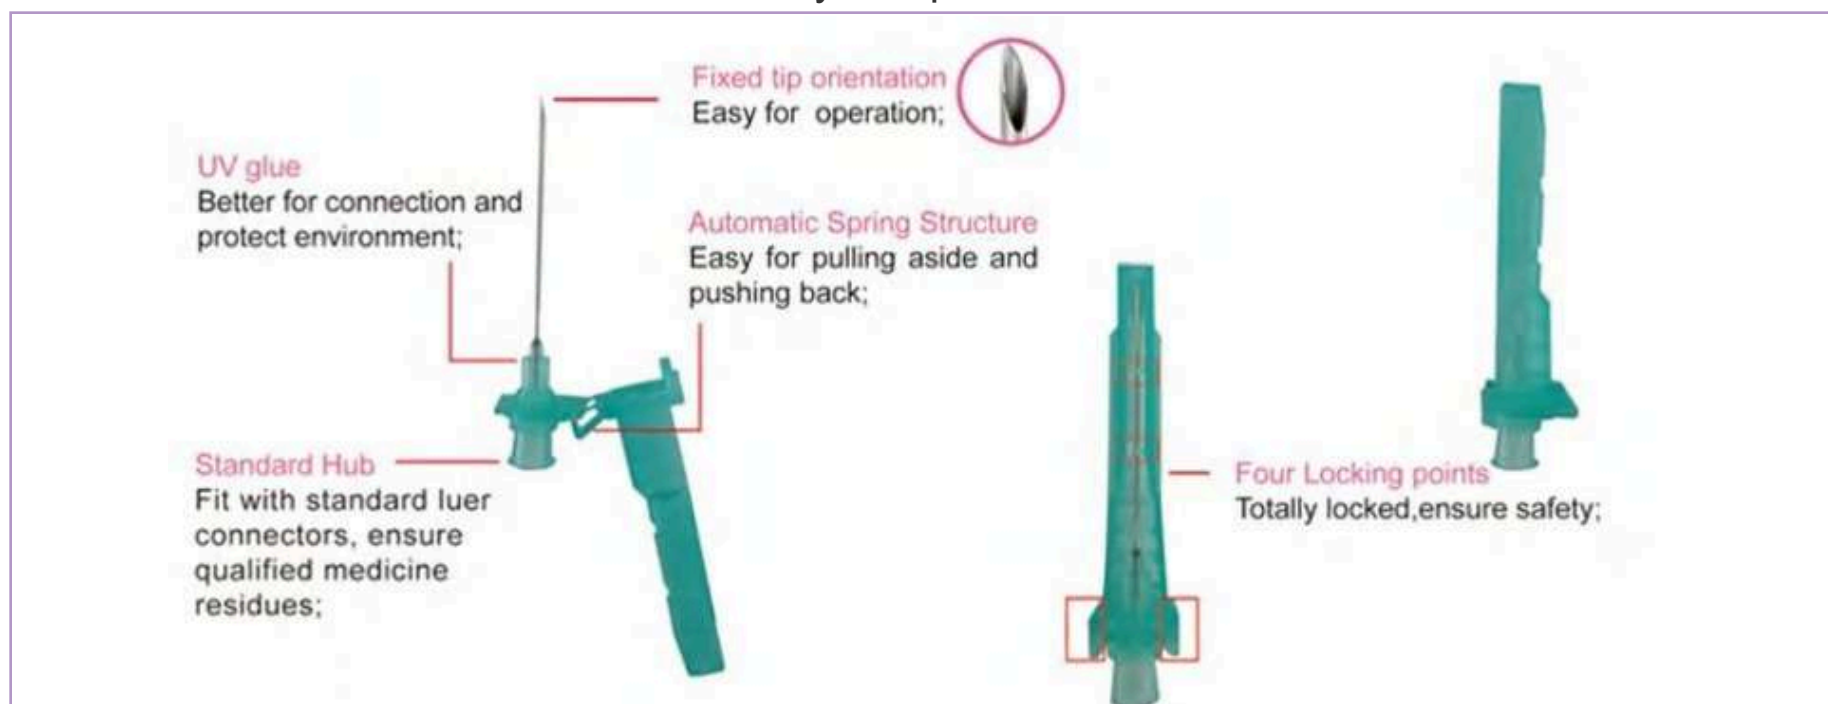


Safety Hypodermic Needle



Safety Insulin Syringe - Safety Clip Type




Safety Insulin Syringe - Retractable Type

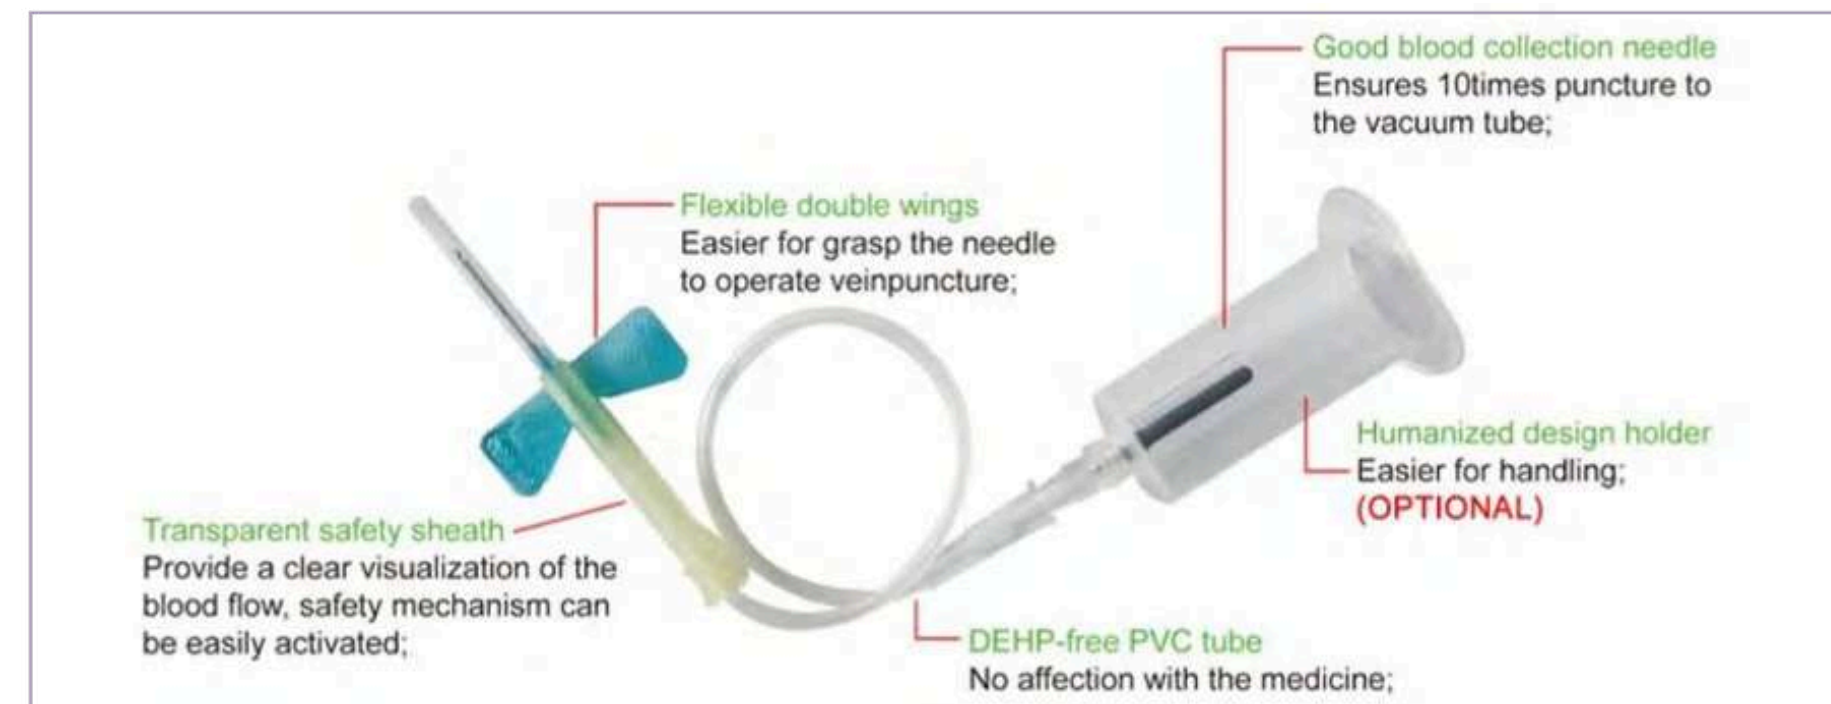


Safety Blood Collection Needle - Butterfly Type



Vacuum Holder

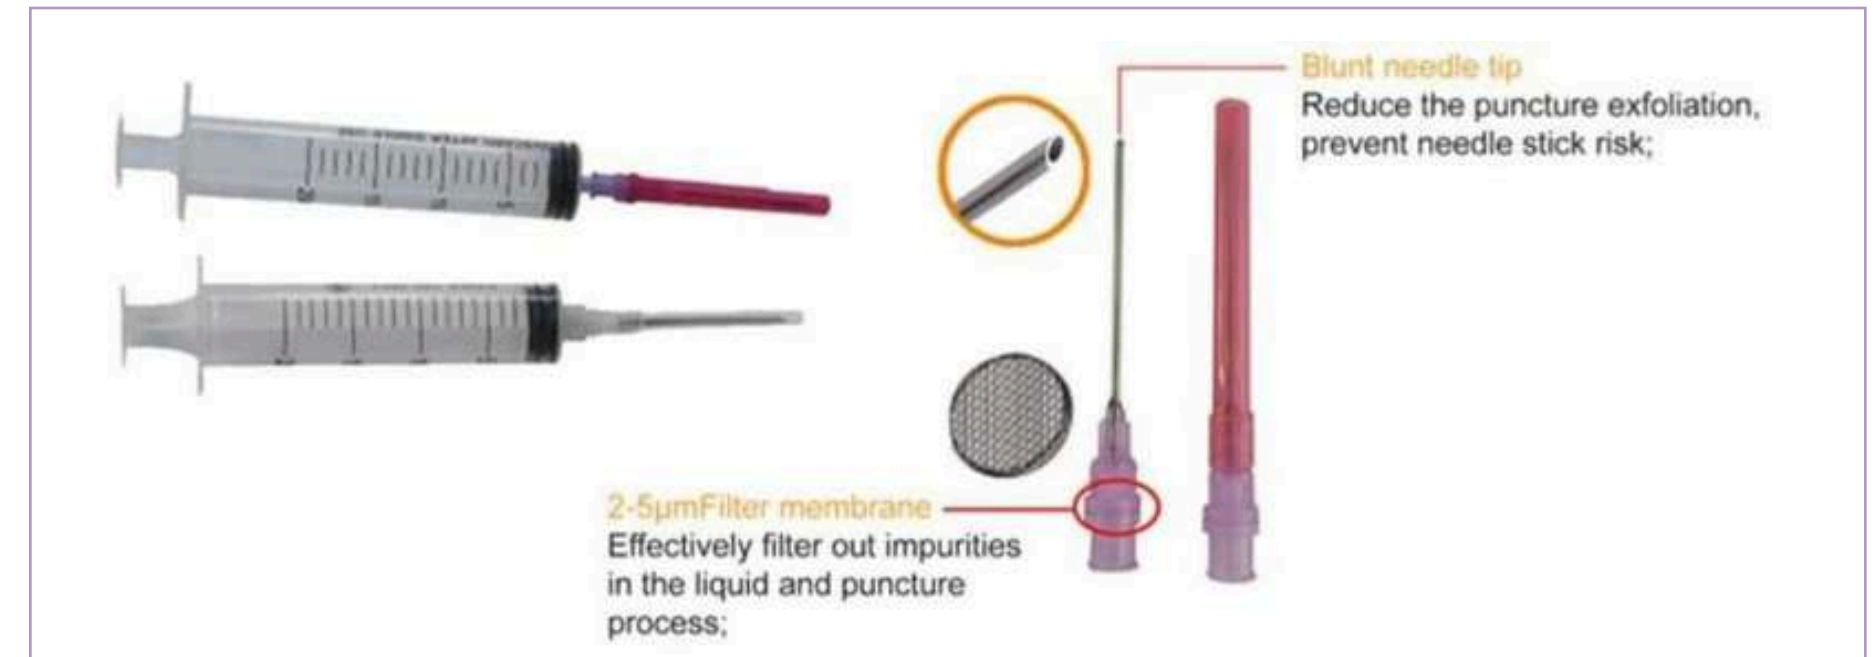


Blunt Filter Syringe

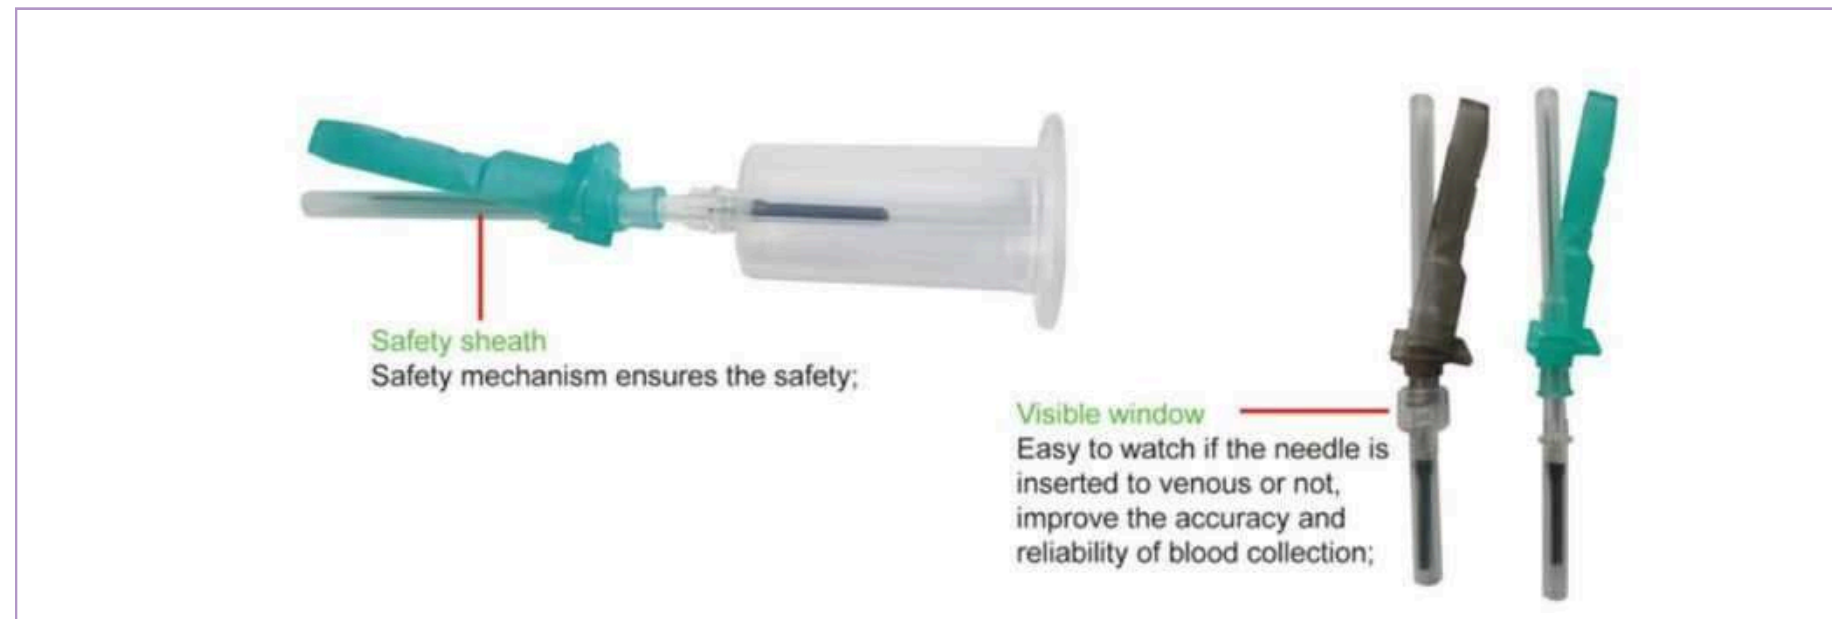


Safety Blood Collection Needle - Safety Needle Type



Safety Blood Collection Needle

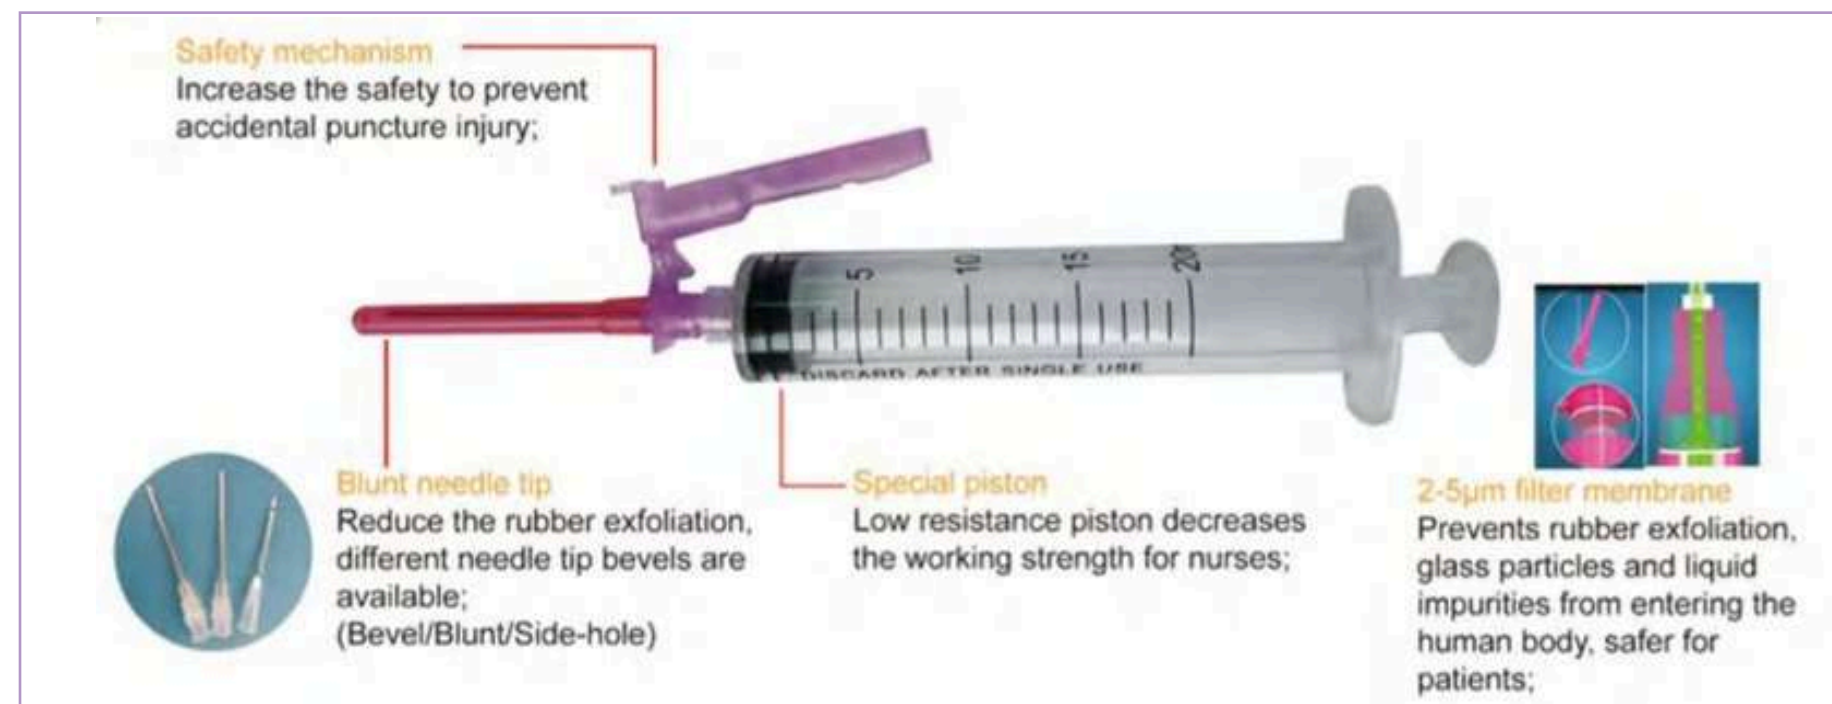


Safety Filter Syringe

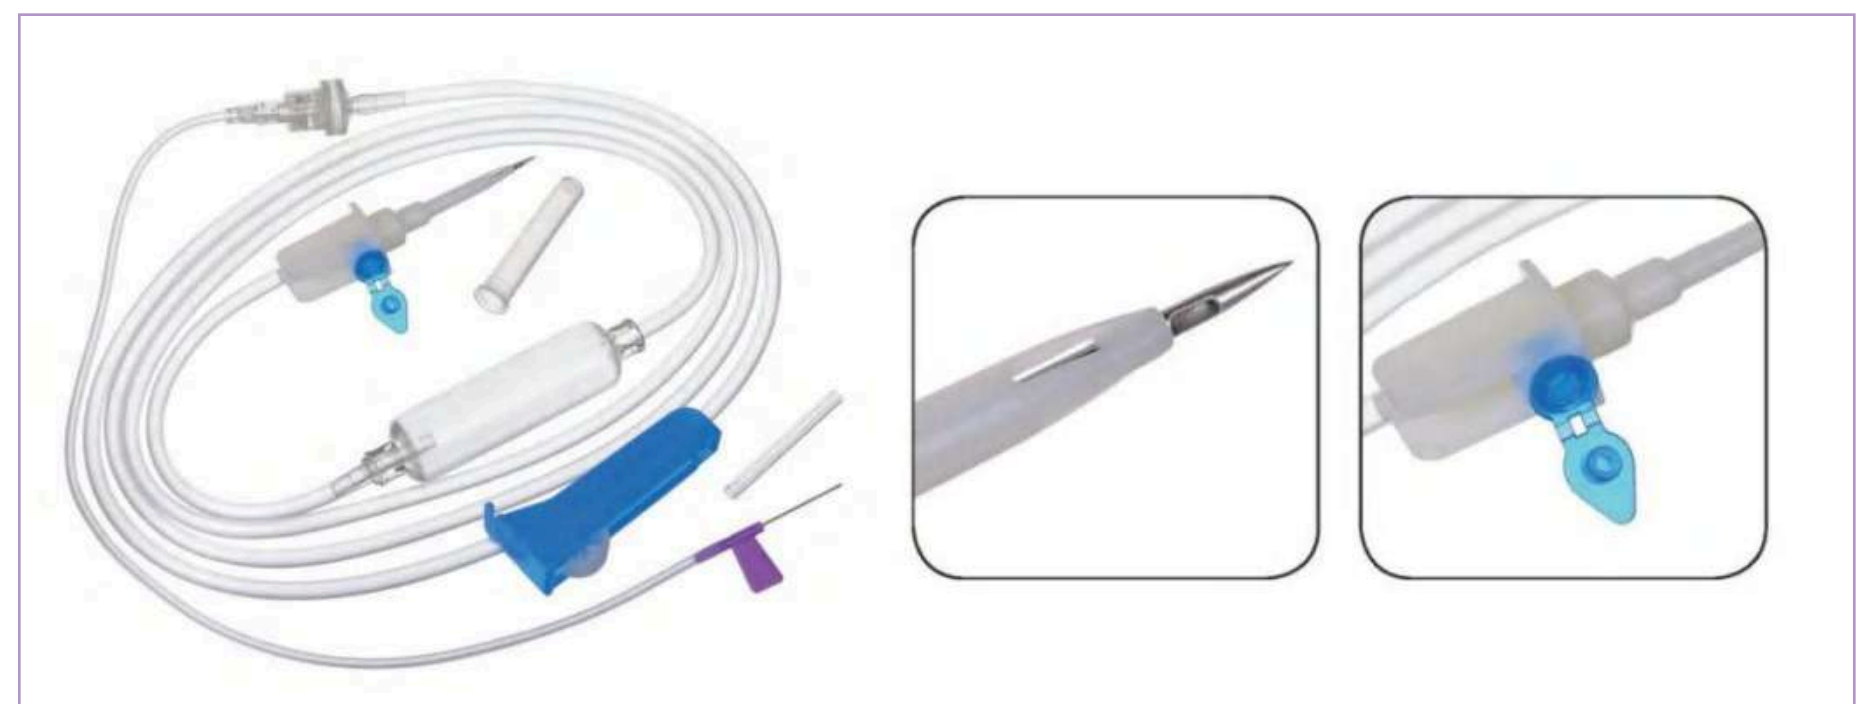

Safety Infusion Set With Needle

Disposable infusion set series

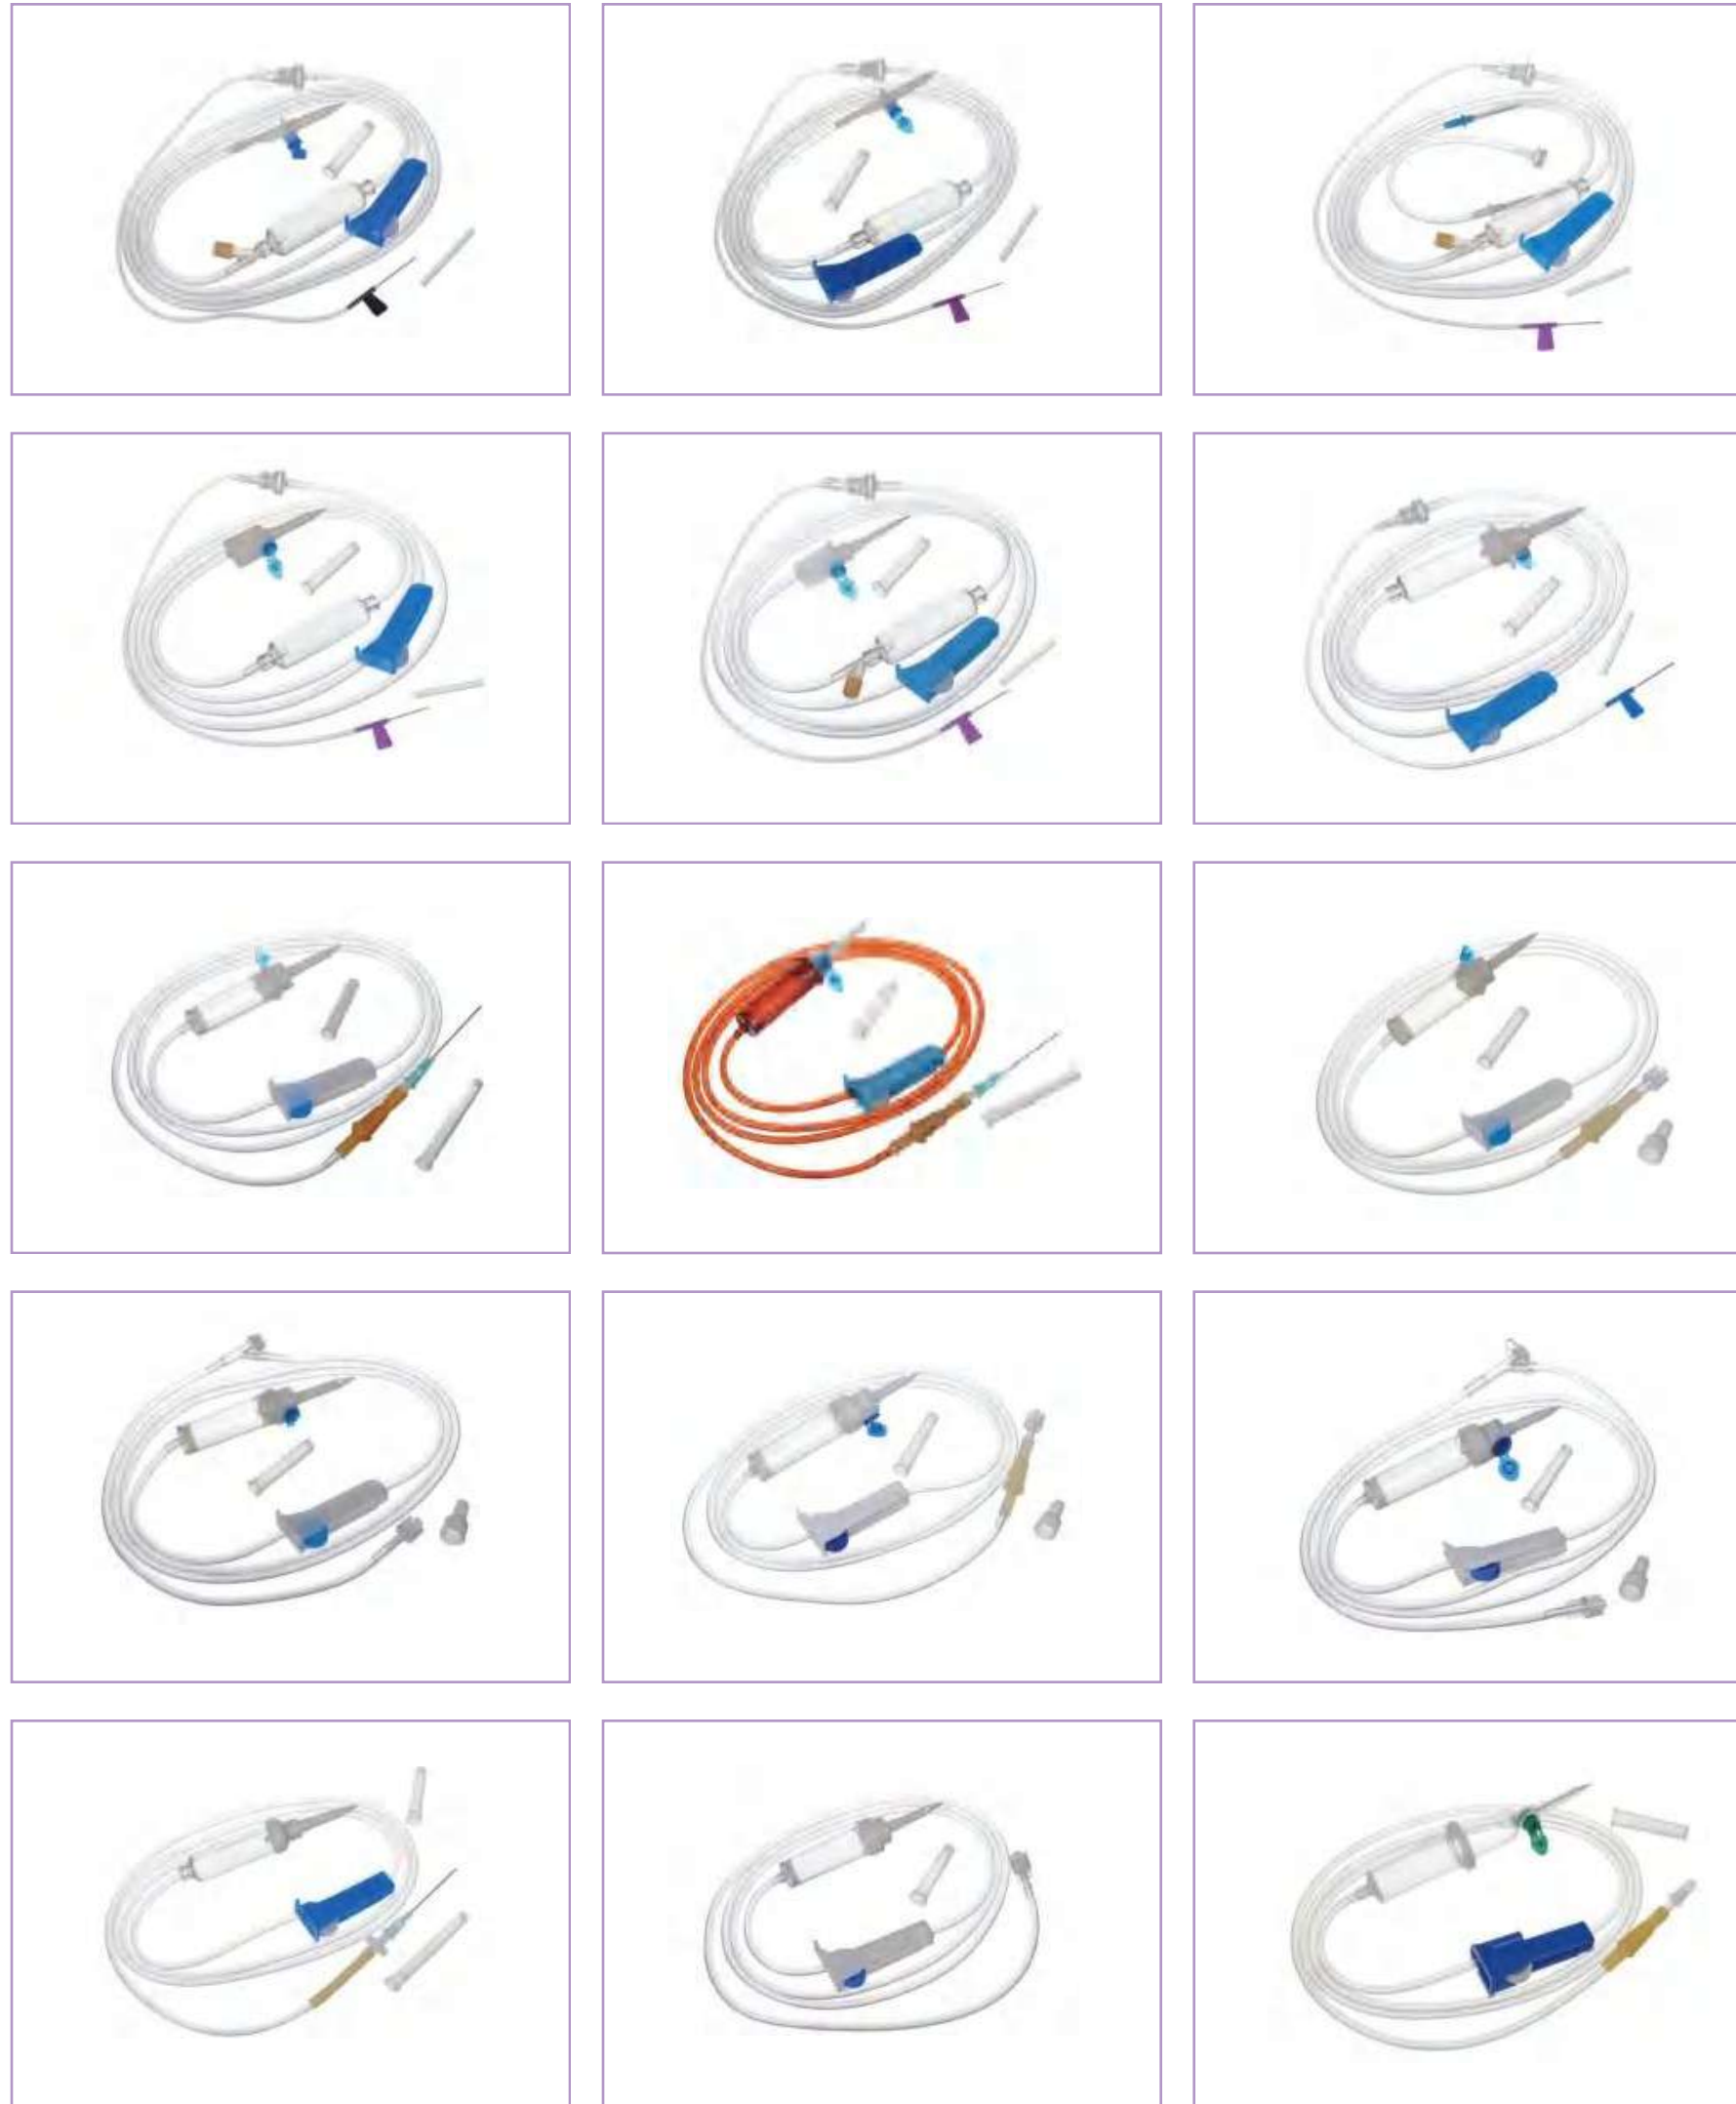

Disposable Suture Series

POINT TYPES OF NEEDLE			SHAPES OF NEEDLE	
Type Name	Symbol	Point Type	1/4 circle	3/8 circle
Taper Point	●			
Blunt Taper Point	⦿			
Tapercut	⦿			
Curved Cutting	▲			
Reverse Cutting	▼			
Micro-point Spatula	▼			
			1/2 circle	5/8 circle
			Straight	

1) SYNTHETIC ABSORBABLE SUTURES

Polyglycolic Acid (PGA)



Multifilament braided
Color: violet
Coated with magnesium stearate
Origin: synthetic
USP: 8/0 -- 2#
Sterilization: EO

Polyglactin 910 (PGLA)



Multifilament braided
Color: violet
Coated with magnesium stearate
Origin: synthetic
USP: 9/0 -- 2#
Sterilization: EO

Polydioxanone (PDS)



Monofilament
Color: violet-undyed
Coated with polydioxanone stearate
Origin: synthetic
USP: 9/0 -- 2#
Sterilization: EO

Polyglycolic Acid Rapid (PGAR)



Multifilament braided
Color: violet-undyed
Coated with magnesium stearate
Origin: synthetic
USP: 8/0 -- 2#
Sterilization: EO

2) NATURAL ABSORBABLE SUTURES

Plain Catgut (CP)



Monofilament
Color: straw
Origin: bovine serosa
USP: 6/0 -- 3#
Sterilization: Gamma Radiation

Chromic Catgut (CC)



Monofilament
Color: brown & green
Origin: bovine serosa
USP: 6/0 -- 3#
Sterilization: Gamma Radiation

3) NON-ABSORBABLE SUTURES

Silk (SK)



Multifilament braided
Color: black
Coated with wax and silicone
Origin: silkworm larval cocoons
USP: 10/0 -- 2#
Sterilization: Gamma Radiation

Nylon (NL)



Monofilament
Color: blue dyed / black dyed
Origin: synthetic
USP: 8/0 -- 2#
Sterilization: Gamma Radiation

Polypropylene (PM)



Monofilament
Color: blue
Origin: synthetic
USP: 8/0 -- 2#
Sterilization: Gamma Radiation

Polyester (PB)



Multifilament braided
Color: green
Origin: synthetic
USP: 6/0 -- 2#
Sterilization: Gamma Radiation

SUTURE MATERIALS



Polyglycolic Acid



Rapid Polyglactin 910



Polyglycolic 910



Poliglecaprone 25



Polydioxanone



Chromic Catgut



Plain Catgut



Polypropylene



Polyester (braided)



Silk (braided)



Nylon Monofilament



Surgical Steel

Vacuum Blood Collection Tubes



Gel & Clot Activator Tube



No Additive Tube



Clot Activator Tube



Heparin Tube



PT Tube



Glucose Tube



DNA Tube



EDTA Tube



NAT Tube




ESR Tube


1. Blood collection sequence and attentions



2. How to use KANGJIAN vacuum tube

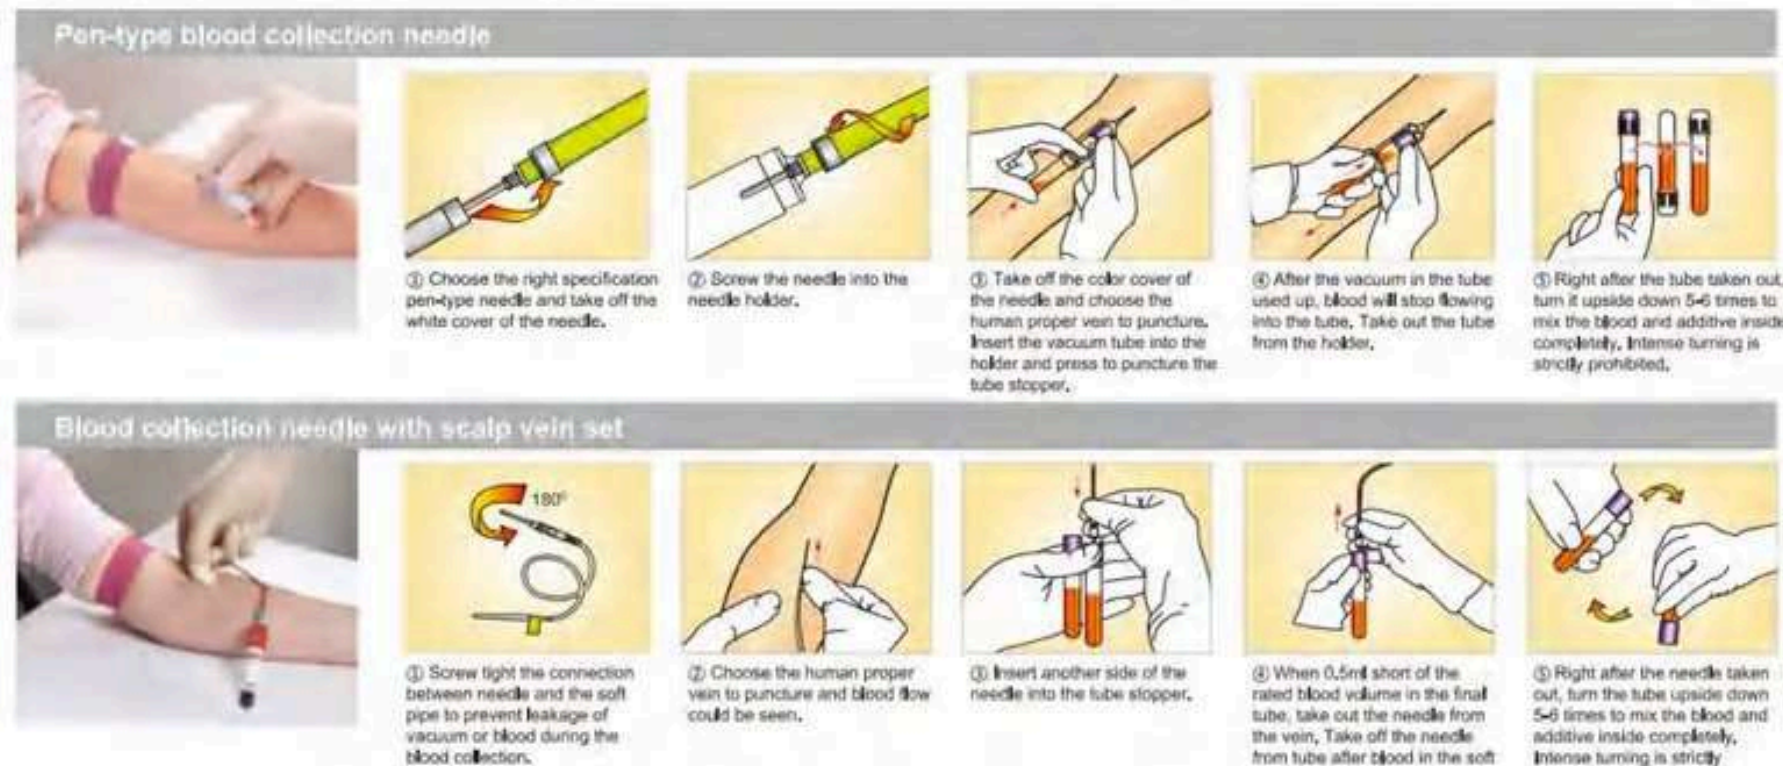

3. Step of correctly preparing high quality serum with Gel/Clot activator tube

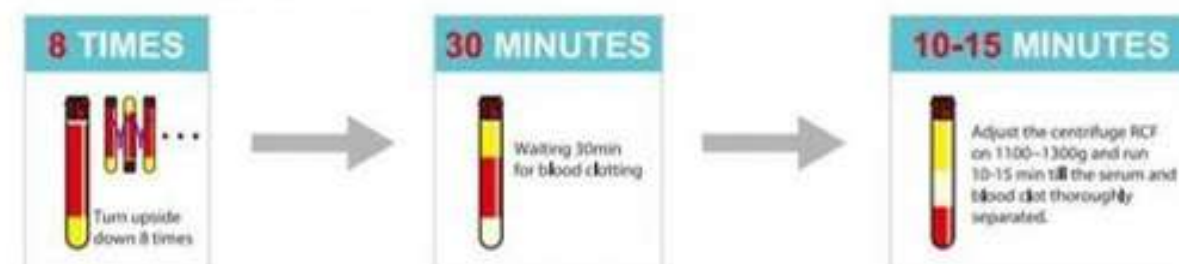

Natural Color Elastic Crepe Bandage



- Material: 80% cotton; 20% spandex
- Weight gsm: 60g,70g,75g,80g,90g
- Clip: With or without clips, elastic band clips,metal clips
- Size:Length(stretched):3.6m,4m,4.5m,5m
- Width: 5cm,7.5cm,10cm,15cm,20cm

Skin Color Elastic Crepe Bandage



- Material: 80% cotton; 20% spandex
- Weight gsm: 70g,75g,80g,90g
- Clip: With or without clips, elastic band clips,metal clips
- Size:Length(stretched):4m,4.5m,5m
- Width: 5cm,7.5cm,10cm,15cm,20cm

Bleached Elastic Crepe Bandage



- Material: 80% cotton; 20% spandex
- Weight gsm: 70g,75g,80g,90g
- Clip: With or without clips, elastic band clips,metal clips
- Size:Length(stretched):4m,4.5m,5m
- Width: 5cm,7.5cm,10cm,15cm,20cm

■ Red (Blue) Line Elastic Crepe Bandage



- Material: 80% cotton; 20% spandex
- Weight gsm: 75g,80g,85g
- Clip: With or without clips, elastic band clips,metal clips
- Size:Length(stretched):4m,4.5m,5m
- Width: 5cm,7.5cm,10cm,15cm,20cm

■ Natural (Bleached) Plain Elastic Bandage



- Material: 55% pure cotton;45% spandex
- Weight gsm: 70g,80g,85g
- Clip: With or without clips, elastic band clips,metal clips
- Size:Length(stretched):4m,4.5m,5m
- Width: 5cm,7.5cm,10cm,15cm,20cm

■ Skin Color Elastic Plain Bandage



- Material: 55% cotton; 45% spandex
- Weight gsm: 70g,80g,90g
- Clip: With or without clips, elastic band clips,metal clips
- Size:Length(stretched):4m,4.5m,5m
- Width: 5cm,7.5cm,10cm,15cm,20cm

■ Pbt (Conforming)bandage



- Material: 45%viscose; 55% polyester with woven edges
- Weight gsm: 28g,30g
- Clip: With or without clips, elastic band clips,metal clips
- Size:Length(stretched):4m,4.5m,5m
- Width: 5cm,7.5cm,10cm,15cm

■ Elastic Bandage (Thick Pbt Bandage)



- Material:55% cotton; 45% polyester with woven edges
- Weight gsm: 55g,60g etc
- Clip: With or without clips, elastic band clips,metal clips
- Length(stretched):4m,4.5m,5m
- Width:5cm,6cm,7.5cm,8cm,10cm,12cm,15cm, 20cm

■ Gauze Bandage With Woven Sides



- Material: 100% cotton
- Yarn: 40's, 32's, 21's Mesh:
- 19x15,30x20,30x30,30x28,40x20,28x24
- Length(stretched):4m,4.5m,5m,6m,9m,10m
 - Width:4cm,5cm,6cm,7.5cm,8cm,10cm,15cm

■ (Pop)Plaster Of Paris Bandage



- Material: cotton and plaster of paris
- Color: white
- Solidifying time: 2 to 5 minutes
- Length(stretched):2m,2.7m,3m,3.6m,4m,4.6m,5m
- Width:5cm,7.5cm,10cm,12.5cm,15cm,20cm,30cm

■ Orthopedic Bandage (Cast Padding)



- Material: 100%cotton ,100% polyester ,50%viscose,50%polyester
- Color: white
- Weight gsm: 70g,80g,90g,100g etc
- Size:Length(stretched):2.7m,3m,4m,4.6m,5m
- Width: 5cm,7.5cm,10cm,12.5cm,15cm,20cm

■ Bandage Elastic Cohesive



- Material: Elastic fiber and non woven fiber
- Weight gsm: 30g,34g,78g,80g
- Color:Vaious
- Size:Length(stretched):4m,4.5m,5m
- Width: 2.5cm,5cm,7.5cm,10cm,15cm,20cm

■ Skin Color High Elastic Bandage



- Material:70% polyester;30% rubber/90%polyester,10% spandex
- Weight gsm: 90g,100g,110g
- Clip: With or without clips, elastic band clips,metal clips
- Size:Length(stretched):4m,4.5m,5m
- Width: 5cm,7.5cm,10cm,15cm,20cm

■ High Elastic Bandage



- Material:85% polyester;15% rubber
- Weight gsm: 85g,90g
- Clip: With or without clips, elastic band clips,metal clips
- Size:Length(stretched):4m,4.5m,5m
- Width: 5cm,7.5cm,10cm,15cm,20cm

■ High Elastic Bandage



- Material:75% polyester;25% rubber/90% polyester,10% spandex
- Weight gsm: 85g,90g,100g
- Clip: With or without clips, elastic band clips,metal clips
- Size:Length(stretched):4m,4.5m,5m
- Width: 5cm,7.5cm,10cm,15cm,20cm

■ Skin Color Highelastic Bandage



- Material:70%polyester;30% rubber/90%polyester,10% spandex
- Weight gsm: 90g,100g,110g
- Clip: With or without clips, elastic band clips,metal clips
- Size:Length(stretched):4m,4.5m,5m
- Width: 5cm,7.5cm,10cm,15cm,20cm

■ High Elastic Bandage



- Material:85% polyester;15% rubber
- Weight gsm: 85g,90g
- Clip: With or without clips, elastic band clips,metal clips
- Size:Length(stretched):4m,4.5m,5m
- Width: 5cm,7.5cm,10cm,15cm,20cm

■ High Elastic Bandage



- Material:75% polyester;25% rubber/90% polyester,10% spandex
- Weight gsm: 85g,90g,100g
- Clip: With or without clips, elastic band clips,metal clips
- Size:Length(stretched):4m,4.5m,5m
- Width: 5cm,7.5cm,10cm,15cm,20cm

■ Blue Line High Elastic Bandage



- Material:50% cotton;20% polyester,30% rubber
- Weight gsm: 90g,100g
- Clip: With or without clips, elastic band clips,metal clips
- Size:Length(stretched):4m,4.5m,5m
- Width: 5cm,7.5cm,10cm,15cm,20cm

■ Skin Color High Elastic Bandage



- Material:57% cotton;26.5% polyester,16.5% rubber
- Weight gsm: 70g,80g
- Clip: With or without clips, elastic band clips,metal clips
- Size:Length(stretched):3.2m,4m,4.5m,5m
- Width: 5cm,7.5cm,10cm,15cm

■ High Elastic Bandage



- Material:50% Cotton;20% polyester;30% rubber
- Weight gsm: 100g,110g
- Clip: With or without clips, elastic band clips,metal clips
- Size:Length(stretched):4m,4.5m,5m
- Width: 5cm,7.5cm,10cm,15cm

■ Purflled High Elastic Bandage



- Material:55% KS Cotton;20% polyester;25% rubber
- Weight gsm: 90g,100g,110g
- Clip: With or without clips, elastic band clips,metal clips
- Size:Length(stretched):4m,4.5m,5m
- Width: 5cm,7.5cm,10cm,15cm,20cm

■ Laced High Elastic Bandage



- Material:50% Cotton;10% spandex;40% polyester
- Weight gsm: 80g,90g
- Clip: With or without clips, elastic band clips,metal clips
- Size:Length(stretched):4m,4.5m,5m
- Width: 5cm,7.5cm,10cm,15cm

■ First Aid Bandage



- Sterile or non sterile
- Material:Bandage and Pad
- Bandage: Conforming bandage or gauze bandage
- Pad: Low adherent dressing,cotton covered with gauze or nonwoven
- Size:Bandage LxW(Pad LxW)
6cmx4m(6x8cm);8cmx4m(8x10cm)
10cmx4m(10x12cm);12cmx5m(12x16cm)

■ First Aid Bandage (H-type)



- Length:10cmx1.75cm(Original Length)
15cmx1.75cm(Original Length)
- CottonPad Size: 20x24cm
- 200pcs/carton
- EO sterilization

■ Military Emergency(israel)bandage



- Size: 10cmx4m 15cmx4m etc
- Cotton Pad Size: 10cmx10cm 10cmx12cm
15cmx18cm
- EO Sterilization, Vacuum Package

■ Compressed Gauze



- Medical compressed bandage
- Sterile crinkle cotton fluff bandage rolls
- Material:100% cotton cloth
- Size:4.5"x4.1YDS
- 6Plys,pure white colour

Soft Collar



- Shaped for confort and to give the correct support to help relieve the pain suffered from whiplash, stiff neck and muscular tension.
- Made from high density closed cell foam(4D&100D)for better support,have a woven covering.
- Available in 3size: small,medium and large
- S:44x9cm M:48x10cm L:53x11cm

Collar &Cuff



- Material:Cotton,Foam
- Size: 5cmx6m; 7,5cmx6m
- Package:2rolls/bg/box,16rolls/carton

Skin Traction Kit



- Skin Traction Kit
- Material: bandage and foam,belt and tape
- Size:Child,Adult
- Type:Adhesive,Non adhesive
- Package:1pc/bag/box,100boxes/carton

Vaseline Gauze & Vaseline Bandage



- 10cmx10cm,1pc/Sterile Package
- 10packs/boxGamma Sterilization
- 10cmx10m;10cmx8mroll/Sterile Package
- Gamma Sterilization

Tubular Gauze Bandage



- Material:100% Cotton,Rubber&Cotton,100% Polyester etc
- Weight g/m²:180g,200g,260g,280g,300g
- Length:1m,10m,20m,25m,50m
- Width:2.5cm,4.5cm,5cm,6.25cm,7.5cm,10cm,12.5cm,15cm,20cm,25cm,30cm,32.5cm,37.5 cm etc
- Coulour:Natural,White,Skin

Tubular Net Bandage



- Material:Rubber&High Stretch Yarn
- Size:0#(0.6cm),0.5#(0.9cm),1#(1.7cm),2#(2.0cm),3#(2.3cm)4#(2.7cm),5#(3.0cm),5.5#(3.5cm),5.8#(4.2cm),6#(5.8cm),7#(7.2cm),8#(8.5cm),9#(9.0cm),10#(10.0cm)
- Length:1m,10m,20m,25m

■ Triangular Bandage



- Material: 100% Cotton, 100% Non woven
- Size: 90cmx90cmx127cm 100cmx100cmx142cm
- Specification: Cotton 40S, 32S, 50x48, 40x40 etc
- Nonwoven: 30g/m², 40g/m² etc

■ Collar & Cuff



- Size: 7.5cmx3.6m 10cmx3.6m
- Pain relief in seconds.
- Effective cold therapy for many conditions such as bruises, inflammation, sprains, strains and sport injuries.
- No refrigeration necessary.
- Hypoallergenic, Good for hours.
- Easy to use.

■ Elastic Adhesive Bandage (Eab)



- Material: Cotton
- Kind of glue: Hot Melt Glue with Zinc Oxide
- Color of glue: White or Yellow
- Width: 2.5cm, 5cm, 7.5cm, 10cm, 15cm, 20cm, 3cm, 6cm, 8cm
- Length: 4.5m (stretched), 2.5m (unstretched)
- Edge: cut edge, feather edge
- Cloth Weight: stretched 147 ± 5g/m²

■ Zinc Oxide Tape



- Material: Cotton cloth, zinc oxide glue
- Packing: simple packing or plastic spool package
- Color: White or Skin
- Size: Length: 4m, 4.5m, 5m, 9.1m, 10m etc.
- Width: 2.5cm, 5cm, 7.5cm, 10cm, 15cm, 20cm

■ Paper Tape And Nonwoven Tape



- Material: Paper/nonwoven cloth, hot-melt or Acrylic glue
- Packing: simple packing or plastic spool package
- Color: White or Skin
- Size: Length: 4m, 4.5m, 5m, 9.1m, 10m etc.
- Width: 2.5cm, 5cm, 7.5cm, 10cm, 15cm, 20cm

■ Pe Tape



- Material: PE cloth, hot-melt or Acrylic glue
- Packing: simple packing or plastic spool package
- Color: White or Skin
- Size: Length: 4m, 4.5m, 5m, 9.1m, 10m etc.
- Width: 2.5cm, 5cm, 7.5cm, 10cm, 15cm, 20cm

■ Silk Tape



- Material: Silk cloth, hot-melt or Acrylic glue
- Packing: simple packing or plastic spool package
- Side: Plain side or sawtooth side
- Size:Length: 4m,4.5m,5m,9.1m, 10m etc.
- Width: 2.5cm,5cm,7.5cm,10cm,15cm,20cm

■ Kinesiology Tape (- K tape)



- Component:warp:cotton +spandex
woof:100% cotton
- Cotton/Spandex: 96.7/3.3
- Kind of glue:Acrylic glue
- Color of glue:transparency
- Width:2.5cm,5cm,7.5cm,10cm,Length:5m

■ Adhesive Dressing Tape



- Material:non-woven
- Size:2.5/5/7.5/10/15/20/25cm x 5m/10m/20m
- Package:1roll/box
360/180/180/180/120/96/72boxes/ctn

■ Disposble Brief



- Size: M/L/XL/XXL
- Size for reference:26x17cm
- With top elastic wrist:2-2.5cm
- Color of wrist: Pink, red, blue, dark etc.
- OEM package is workable, with color bag or box.

■ Disposble Nursing Breast Pad



- Size:11cm or 13cm, 2-3.8g or according to customer demand
- Materil:PP nonwoven + wood pulk+PEWith or without SAP
- Packing:30pcs/box, 720pcs/ctn
- Use:for hospital, clinic or supermarket

■ Eye Pad



- SIZE: 57X82 mm, 67X92 mm
- MEAS: 52 × 23.5 × 28 cm
- PACKING: 50 pcs X 20 box

Adhesive Bandage



Non-woven Adhesive Bandage



Non-elastic Fabric Adhesive Bandage



PE Waterproof Adhesive Bandage



PU Waterproof Adhesive Bandage




Elastic Adhesive Bandage



Elastic Mix Knuckle Adhesive Bandage



PE Waterproof Suit Package

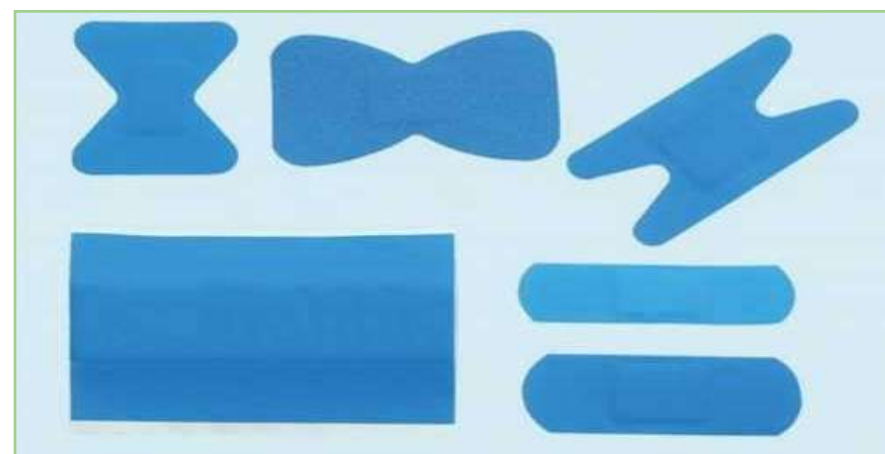

Blue Metal Detectable Wound Plaster

Surgical Tape



TINPLATE TAPE



Silk Tape



Non-woven Paper Tape



Silk Zinc Oxide Perforated Plaster



Elastic Adhesive Bandage



Zinc oxide Plaster with Plastic cover



PE Waterproof Tape



PU/Non woven fixing Tape

Adhesive Bandage



Non-woven Adhesive Bandage



Non-elastic Fabric Adhesive Bandage



PE Waterproof Adhesive Bandage



PU Waterproof Adhesive Bandage




Elastic Adhesive Bandage



Elastic Mix Knuckle Adhesive Bandage



PE Waterproof Suit Package

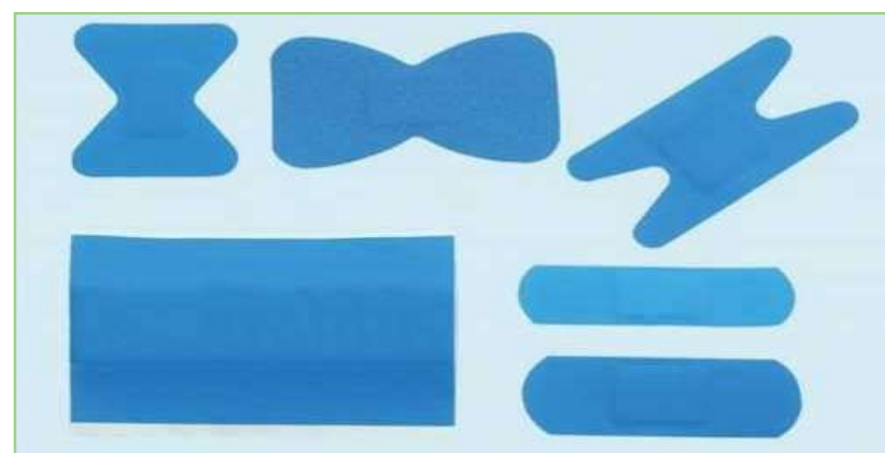

Blue Metal Detectable Wound Plaster

Surgical Tape



TINPLATE TAPE



Silk Tape



Non-woven Paper Tape



Silk Zinc Oxide Perforated Plaster



Elastic Adhesive Bandage



Zinc oxide Plaster with Plastic cover




PE Waterproof Tape



PU/Non woven fixing Tape

More Product

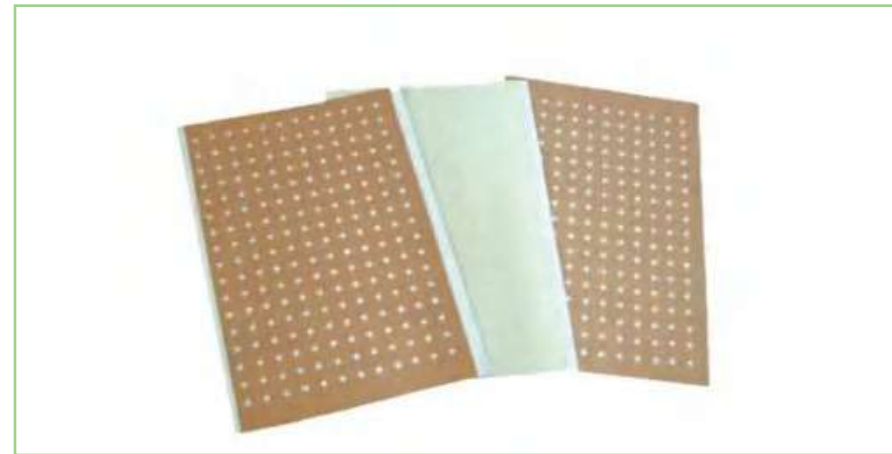

Capsicum Plaster



Cooling Gel Plaster



Toenail Correction Patches



Silicone Scar Removal Sheets




Non-elastic Fabric Adhesive Bandage



Kinesiology Tape



Nipple Cover Patches

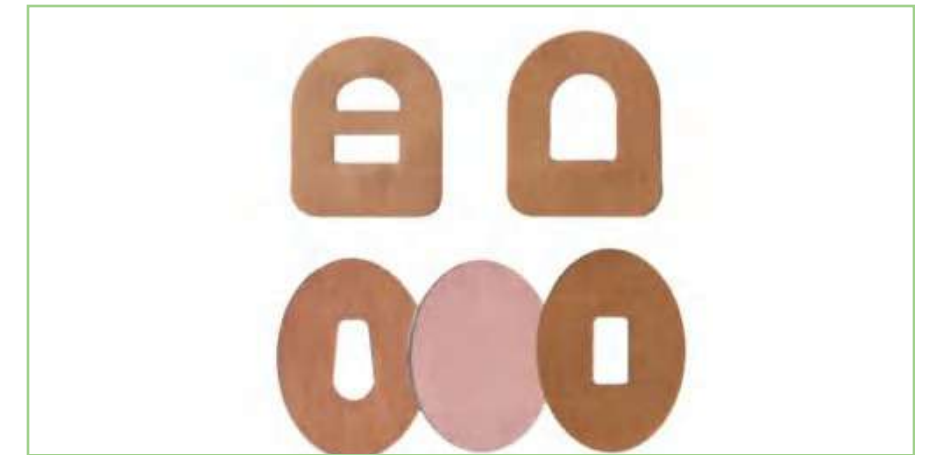

Adhesive Patches for Sensor



Hydrocolloid Acne Patches



Better Breathe Nasal Strips



IV Blood Collection Patches



Hydrocolloid Adhesive Dressing



Mouth Tape for Sleeping



Wound Closure Strips




Acupuncture Points Strips



Blister Bandages

■ Sterile Gauze Swab

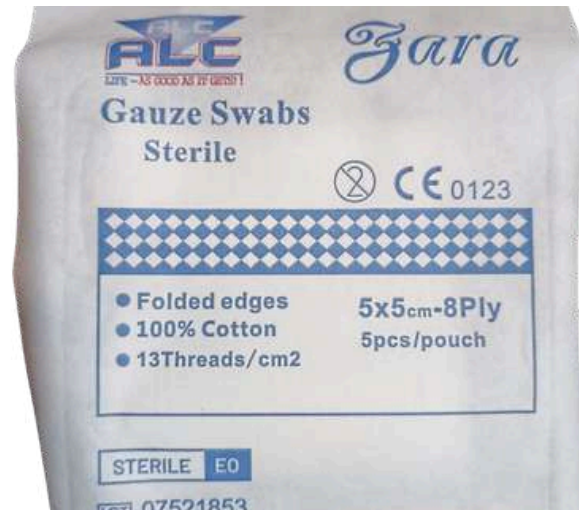

- 100% cotton, high absorbency and softness
- With or without x-ray detectable threads
- Folded edge or non-folded edge
- Pouch: paper+paper, paper+film
- Gamma, EO, Steam

■ Non Sterile Gauze Swab



- 100% cotton, high absorbency and softness
- With or without x-ray detectable threads
- Folded edge or non-folded edge

■ Sterile Lap Sponge



- 100% cotton, high absorbency and softness
- With or without x-ray detectable/x-ray film, with or without blue loop
- Pre- washed or non – washed
- Gamma, EO, Steam

■ Non Sterile Lap Sponge



- 100% cotton, high absorbency and softness
- With or without x-ray detectable/x-ray film, with or without blue loop
- Pre- washed or non – washed

■ Non Sterile Gauze Bandage



- 100% cotton, high absorbency and softness
- Gamma, EO, Steam

■ Sterile Non-Woven Sponge



- Made of spunlace non woven material, 70% viscose+30% polyester
- With or without x-ray detectable
- Pouch: paper+paper, paper+film
- Gamma, EO, Steam

■ Non Sterile Non-woven Sponge



- Made of spunlace non woven material, 70% viscose + 30% polyester
- Weight: 30, 35, 40, 50gsm/sq
- With or without x-ray detectable
- 4ply, 6ply, 8ply, 12ply
5x5cm, 7.5x7.5cm, 10x10cm, 10x20cm etc
- 60pcs, 100pcs, 200pcs/pck(Non-sterile)

■ Gamgee Dressing



- Material: 100% cotton (Sterile and Non sterile)
- Type: non selvage/single selvage/
double selvage
- Sterilization method: Gamma ray/EO gas/Steam

■ Gauze Ball



- Sterile and non sterile.
- 100% cotton, high absorbency and softness
- With or without x - ray detectable, elastic ring
- Gamma, EO, Steam

■ Krinkle gauze bandage



- Material: 100% cotton
- Size: 3.4"x3.6yards-6ply.4.6"x4.1yards-6ply
- Feature: Sterile, Soft Pouch Ideal for multiple wound care applications
- Packing: Blister pack or Vacuum pack

■ Cotton Roll



- Material: 100% pure cotton
- Packing: 1roll/blue kraft paper or polybag
- It is suit for medical and daily use.
- Type: ordinary, precut

■ Cutting Cotton Roll



- Material: 100% cotton
- Size: 100G (Φ13x4.5cm), 250G(Φ17x7cm)
- Feature: Cutting, pressed, popular in South America.

Cotton Ball



- 100% pure cotton
- Sterile and non-sterile
- Color: white, red, blue, pink, green etc
- Weight: 0.5g.1.0g.1.5g.2.0g.3g etc

Zigzag Cotton



- Material:100%pure cotton
- Color: natural white
- Paching: 1roll/polybag
- It is suit for medical and daily use

Dental Cotton Roll




- 100% pure cotton
- 50pcs/pack, 20packs/bag

Dilators Series







Hand washing brush Series

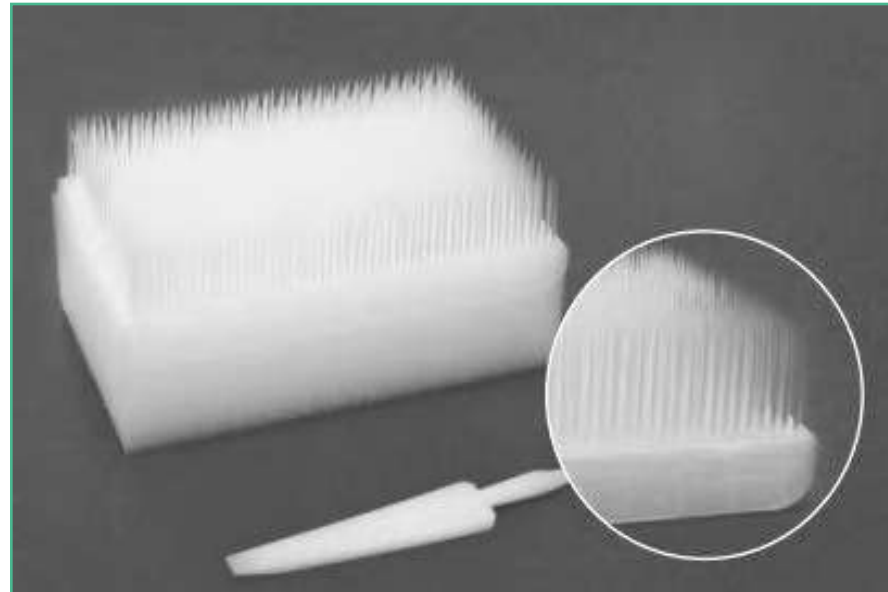


type 1

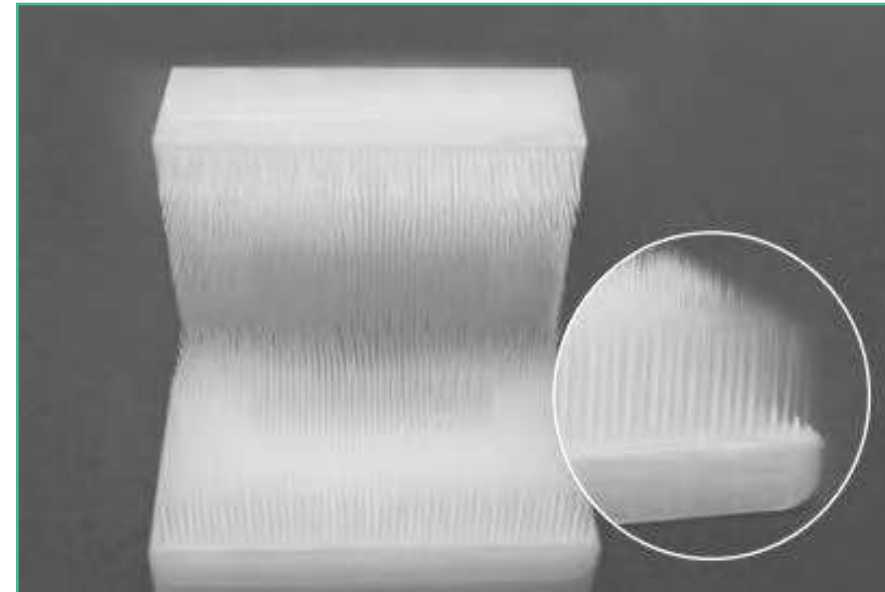


type 2

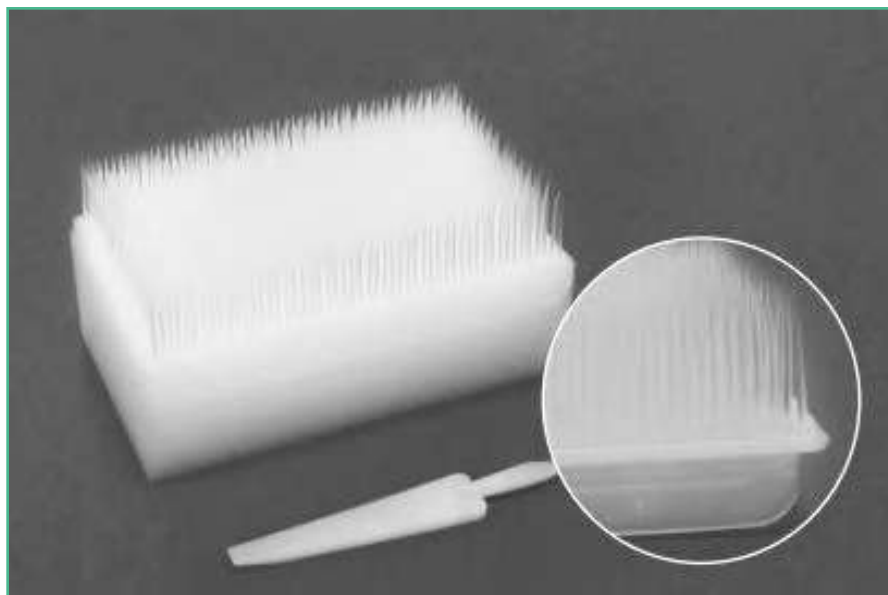


type 3

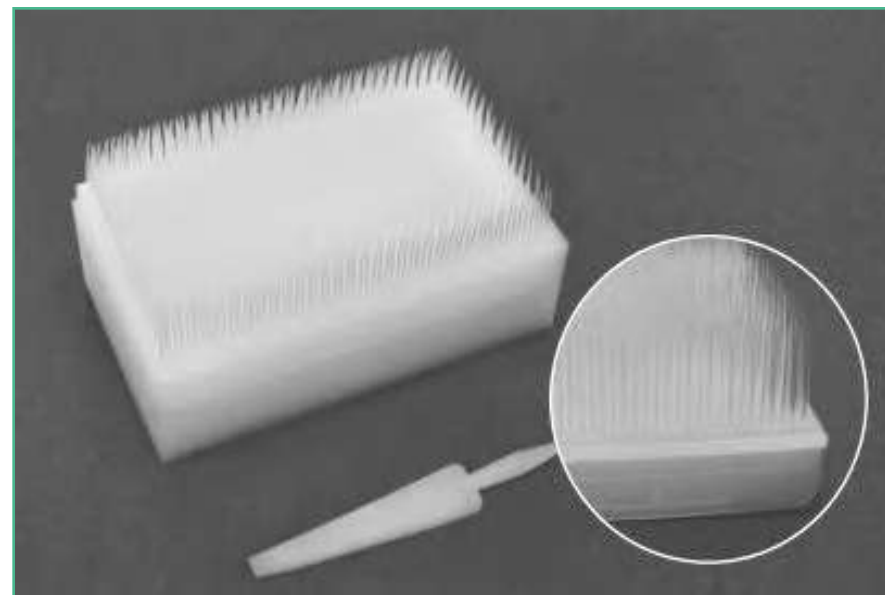

type 4

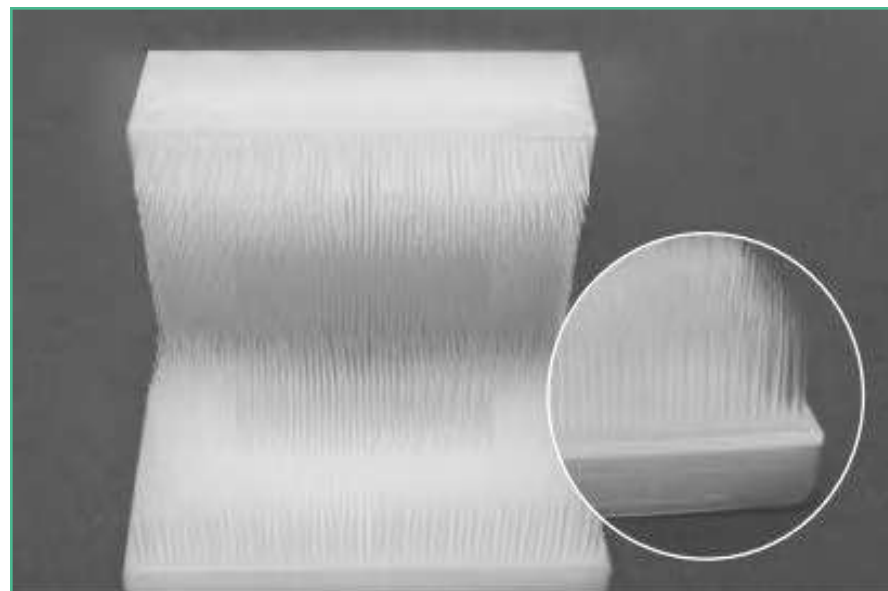

type 5

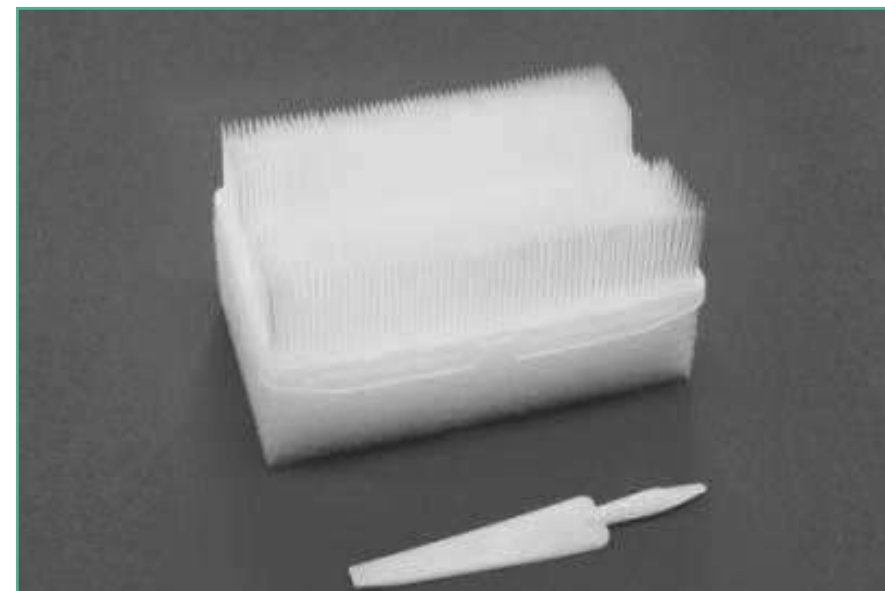

type 6



Povidone-iodine Surgical Scrub Brush



Drysterile surgical Scrubbrush



Chlorhexidine Gluconate Surgical Scrub Brush

Toumiquet					
Mode NO.		Weight and Size Mainbody			
		Weight	Length	Width	
HS-403		23 (g)	400 (mm)	25 (mm)	
		Packing Bill	Box size	Carton Size	Pcs/Ctn
		1 PC/ Plastic bag 100 PCS/BOX	215*155*260 (mm)	500*400*270 (mm)	500
Annotation	ABS buckle	Color Optional: 			

Toumiquet					
Mode NO.		Weight and Size Mainbody			
		Weight	Length	Width	
HS-403A		31.5 (g)	450 (mm)	25 (mm)	
		Packing Bill	Box size	Carton Size	Pcs/Ctn
		1 PC/ Plastic bag 100 PCS/BOX	215*155*260 (mm)	500*400*270 (mm)	400
Annotation	ABS buckle	Color Optional: 			

Toumiquet					
Mode NO.		Weight and Size Mainbody			
		Weight	Length	Width	
HS-403C Patent protection		29 (g)	450 (mm)	25 (mm)	
		Packing Bill	Box size	Carton Size	Pcs/Ctn
		1 PC/ Plastic bag 100 PCS/BOX	215*155*260 (mm)	500*400*270 (mm)	500
Annotation	ABS buckle	Color Optional: 			

Toumiquet					
Mode NO.		Weight and Size Mainbody			
		Weight	Length	Width	
HS-403C Patent protection		29 (g)	450 (mm)	25 (mm)	
		Packing Bill	Box size	Carton Size	Pcs/Ctn
		1 PC/ Plastic bag 100 PCS/BOX	215*155*260 (mm)	500*400*270 (mm)	500
Annotation	ABS buckle	Color Optional: 			

OEM available

Diagnostic Penlight					
Mode NO.		Weight and Size Mainbody			
		Weight	Length	Width	
HS-401F		12 (g)	127 (mm)	15 (mm)	
		Packing Bill	Box size	Carton Size	Pcs/Ctn
		Blister + Battery	295*172*158 (mm)	885*315*340 (mm)	500
Annotation	2xAAA batteries used, ABS shell Portable with clamp.	Color Optional: 			

Stainless Steel Penlight					
Mode NO.		Weight and Size Mainbody			
		Weight	Length	Width	
HS-401F2		14.3 (g)	136 (mm)	12 (mm)	
		Packing Bill	Box size	Carton Size	Pcs/Ctn
		Gift box + Battery	175*160*210 (mm)	510*370*240 (mm)	250
Annotation	2xAAA batteries used; Stainless steel shell.				

Aluminium Alloy Penlight					
Mode NO.		Weight and Size Mainbody			
		Weight	Length	Width	
HS-401F3		10.3 (g)	137 (mm)	12 (mm)	
		Packing Bill	Box size	Carton Size	Pcs/Ctn
		Blister + Battery	295*172*158 (mm)	885*315*340 (mm)	500
Annotation	2xAAA batteries used, Aluminium alloy shell with painting coating.	Color Optional: 			

Flat-mouth Penlight					
Mode NO.		Weight and Size Mainbody			
		Weight	Length	Width	
HS-401F9		11 (g)	140 (mm)	12 (mm)	
		Packing Bill	Box size	Carton Size	Pcs/Ctn
		Blister + Battery	295*172*158 (mm)	885*315*340 (mm)	500
Annotation	Aluminium alloy shell with painting coating. Color is optional. Flat mouth head protects the bulb from damage. 2xAAA batteries.				

Bell-mouthed Head Penlight					
Mode NO.			Weight and Size Mainbody		
			Weight	Length	Width
			12.4 (g)	142 (mm)	Mouth: 15 Body: 12
HS-401F5					
Patent protection	Packing Bill	Box size	Carton Size	Pcs/Ctn	Kgs/Ctn
	Blister + Battery	295*172*158 (mm)	885*315*340 (mm)	500	21
Annotation	2xAAA batteries used; Aluminium alloy shell with painting coating; Color Optional: 				

LED Penlight					
Mode NO.			Weight and Size Mainbody		
			Weight	Length	Width
			14.3 (g)	130 (mm)	12 (mm)
HS-401F8					
	Packing Bill	Box size	Carton Size	Pcs/Ctn	Kgs/Ctn
	Plastic Box + Battery	175*160*210 (mm)	510*370*240 (mm)	250	16
Annotation	2xAAA batteries used; Aluminium alloy shell; LED bulb is used; Super operation time: 10,000 hours!				

Stainless Steel Penlight With Big					
Mode NO.			Weight and Size Mainbody		
			Weight	Length	Width
			28 (g)	153 (mm)	17 (mm)
HS-401F13					
	Packing Bill	Box size	Carton Size	Pcs/Ctn	Kgs/Ctn
	Blister + Battery	400*195*200 (mm)	640*415*415 (mm)	300	23.5
Annotation	2xAA batteries used; Stainless steel shell; LED bulb is used; Super operation time: 10,000 hours.				

General Optic Otoscope					
Mode NO.			Weight and Size Mainbody		
			Weight	Length	Width
			15.5 (g)	147 (mm)	53 (mm)
HS-402					
	Packing Bill	Box size	Carton Size	Pcs/Ctn	Kgs/Ctn
	1 PC/ Plastic bag 100 PCS/BOX	400*195*200 (mm)	610*415*415 (mm)	300	17
Annotation	2xAAA batteries used; 5 tips:				

Medical Gift Series					
Mode NO.			Annotation		
			Diagnostic kit HS-401F1+Otoscope head+Tips+Spatula+2xAAA batteries		
HS-402F1					
	Packing Bill	Box size	Carton Size	Pcs/Ctn	Kgs/Ctn
	Plastic box	188*100*25 (mm)	515*390*265 (mm)	100	15.6

Medical Gift Series					
Mode NO.			Annotation		
			Diagnostic kit HS-401F3+Otoscope head+Tips+2xAAA batteries		
HS-402F3					
	Packing Bill	Box size	Carton Size	Pcs/Ctn	Kgs/Ctn
	Plastic box	190*70*30 (mm)	400*350*320 (mm)	100	11.5

Medical Gift Series					
Mode NO.			Annotation		
			Diagnostic kit HS-401F2+Otoscope head+Tips+2xAAA batteries		
HS-402F2					
	Packing Bill	Box size	Carton Size	Pcs/Ctn	Kgs/Ctn
	Plastic box	190*70*30 (mm)	400*350*320 (mm)	100	12.8

Medical Gift Series					
Mode NO.			Annotation		
			Diagnostic kit HS-401F2+Otoscope head+Tips+Spatula clip+Spatula +Blue filter+2xAAA batteries		
HS-402F2-A					
	Packing Bill	Box size	Carton Size	Pcs/Ctn	Kgs/Ctn
	Plastic box	188*100*25 (mm)	515*390*265 (mm)	100	14

Medical Gift Series					
Mode NO.		Annotation			
HS-402F13-B		Diagnostic kit HS-401F13+Otoscope head+Tips+2xAAA batteries			
		Packing Bill	Box size	Carton Size	Pcs/Ctn
		Plastic box	190*70*30 (mm)	400*350*320 (mm)	100
				Kgs/Ctn	16.5

Neurological Hammer					
Mode NO.		Weight and Size Mainbody			
HS-401G2		Weight	Length	Width	
Taylor Hammer		56 (g)	188 (mm)	21 (mm)	
	Packing Bill	Box size	Carton Size	Pcs/Ctn	Kgs/Ctn
	Blister	260*170*155 (mm)	555*340*170 (mm)	100	8.5
Annotation	Zinc alloy handle; PVC head; Color is optional.				

Neurological Hammer					
Mode NO.		Weight and Size Mainbody			
HS-401G3		Weight	Length	Width	
Buck Hammer		90 (g)	186 (mm)	56 (mm)	
	Packing Bill	Box size	Carton Size	Pcs/Ctn	Kgs/Ctn
	Blister	260*170*155 (mm)	555*340*170 (mm)	100	10
Annotation	Zinc alloy handle; PVC head; Diagnostic Pin can be screwed off conveniently in the head, while diagnostic brush can be taken out in the end.				

Neurological Hammer					
Mode NO.		Weight and Size Mainbody			
HS-401G5		Weight	Length	Width	
Babinski Hammer		97 (g)	230 (mm)	44 (mm)	
	Packing Bill	Box size	Carton Size	Pcs/Ctn	Kgs/Ctn
	Blister	260*170*155 (mm)	555*340*170 (mm)	100	12
Annotation	Zinc alloy handle; PVC head; Color is optional.				

Neurological Hammer					
Mode NO.		Weight and Size Mainbody			
HS-401G7		Weight	Length	Width	
Babinski Hammer with telescopic handle		81 (g)	Max: 385 (mm) Min: 180 (mm)	44 (mm)	
	Packing Bill	Box size	Carton Size	Pcs/Ctn	Kgs/Ctn
	White Box	230*230*150 (mm)	495*480*170 (mm)	100	11.6
Annotation	SS handle; PVC head; Color is optional.				

Neurological Hammer					
Mode NO.		Weight and Size Mainbody			
HS-401G8		Weight	Length	Width	
Queen's square Hammer		62 (g)	320 (mm)	44 (mm)	
	Packing Bill	Box size	Carton Size	Pcs/Ctn	Kgs/Ctn
	Blister	400*195*200 (mm)	420*410*210 (mm)	50	5

Neurological Hammer					
Mode NO.		Weight and Size Mainbody			
HS-401G10A		Weight	Length	Width	
Wartenberg pinwheel Hammer		60 (g)	185 (mm)	30 (mm)	
	Packing Bill	Box size	Carton Size	Pcs/Ctn	Kgs/Ctn
	Blister	260*170*155 (mm)	555*340*170 (mm)	100	8
Annotation	Zinc alloy handle; Copper head.				

Neurological Hammer					
Mode NO.		Weight and Size Mainbody			
HS-401G11		Weight	Length	Width	
Hammer		140 (g)	220 (mm)	85 (mm)	
	Packing Bill	Box size	Carton Size	Pcs/Ctn	Kgs/Ctn
	Poly bag	400*195*200 (mm)	420*410*210 (mm)	50	9
Annotation	Nylon handle; Zinc alloy + silicone head; Color is optional.				

Neurological Hammer					
Mode NO.		Weight and Size Mainbody			
		Weight	Length	Width	
HS-401G13 Hammer		90 (g)	340 (mm)	head: 50 (mm) handle: 10 (mm)	
	Packing Bill	Box size	Carton Size	Pcs/Ctn	Kgs/Ctn
	Poly bag	400*195*200 (mm)	420*410*210 (mm)	50	6.5
Annotation	Nylon handle; Zinc alloy + silicone head; Color is optional.				

Neurological Hammer					
Mode NO.		Weight and Size Mainbody			
		Weight	Length	Width	
HS-401G12 Bowling'-Shaped Hammer		90 (g)	186 (mm)	60 (mm)	
	Packing Bill	Box size	Carton Size	Pcs/Ctn	Kgs/Ctn
	Blister	260*170*155 (mm)	555*340*170 (mm)	100	11
Annotation	Zinc alloy handle; Zinc alloy + silicone head; Color is optional.				

Neurological Hammer					
Mode NO.		Weight and Size Mainbody			
		Weight	Length	Width	
Patent protection HS-401G20 'Chopper'-Shaped Hammer		90 (g)	200 (mm)	51 (mm)	
	Packing Bill	Box size	Carton Size	Pcs/Ctn	Kgs/Ctn
	White Box	400*195*200 (mm)	420*410*210 (mm)	50	7
Annotation	Zinc alloy handle; Silicone head; Color is optional.				

Neurological Hammer					
Mode NO.		Weight and Size Mainbody			
		Weight	Length	Width	
Patent protection HS-401G21 'Bowling'-Shaped Hammer		120 (g)	200 (mm)	85 (mm)	
	Packing Bill	Box size	Carton Size	Pcs/Ctn	Kgs/Ctn
	Blister	400*195*200 (mm)	420*410*210 (mm)	50	8.5
Annotation	ABS handle; Zinc alloy + Silicone head; Color is optional.				

Neurological Hammer					
Mode NO.		Weight and Size Mainbody			
		Weight	Length	Width	
HS-401G22 Hammer		106 (g)	220 (mm)	73 (mm)	
	Packing Bill	Box size	Carton Size	Pcs/Ctn	Kgs/Ctn
	Blister	400*195*200 (mm)	420*410*210 (mm)	50	7.8
Annotation	ABS handle; Zinc alloy + silicone head; Color is optional.				

Medical Gift Series					
Mode NO.		Annotation			
		Diagnostic kit HS-401F13+Otoscope head+G20+2xAAA batteries			
HS-401G24		Packing Bill	Box size	Carton Size	Pcs/Ctn
		Plastic box	215*120*30 (mm)	460*260*305 (mm)	40
					13

Medical Gift Series					
Mode NO.		Annotation			
		Diagnostic kit HS-401G2+G3+G10A			
HS-401G28		Packing Bill	Box size	Carton Size	Pcs/Ctn
		Plastic box	215*120*30 (mm)	460*260*305 (mm)	40
					14.5

Medical Gift Series					
Mode NO.		Annotation			
		Diagnostic kit HS-401G2+G3+G5+G8+G10A			
HS-401G10		Packing Bill	Box size	Carton Size	Pcs/Ctn
		Plastic box	345*130*30 (mm)	570*365*300 (mm)	40
					23

■ Transport Swab with Tube



■ Transport Swab with Medium



■ Collection Swab & Virus Sampling Tube



■ Clinical Diagnostic Testing Products



HCG Strip



HCG Cassette



HCG Midstream



LH Strip



LH Cassette



LH Midstream



Malaria Test



Dengue Test



H.Pylori Test



TP Syphilis Test



HIV Test



Hbs Ag Test



HCV Test



FOB Fecal occult blood



Urine strips



COVID-19 Antigen Rapid test





SARS-CoV-2/Flu A&B



COVID-19/FluA+B/RSV



SARS-CoV-2/Flu A&B/RSV/Adv

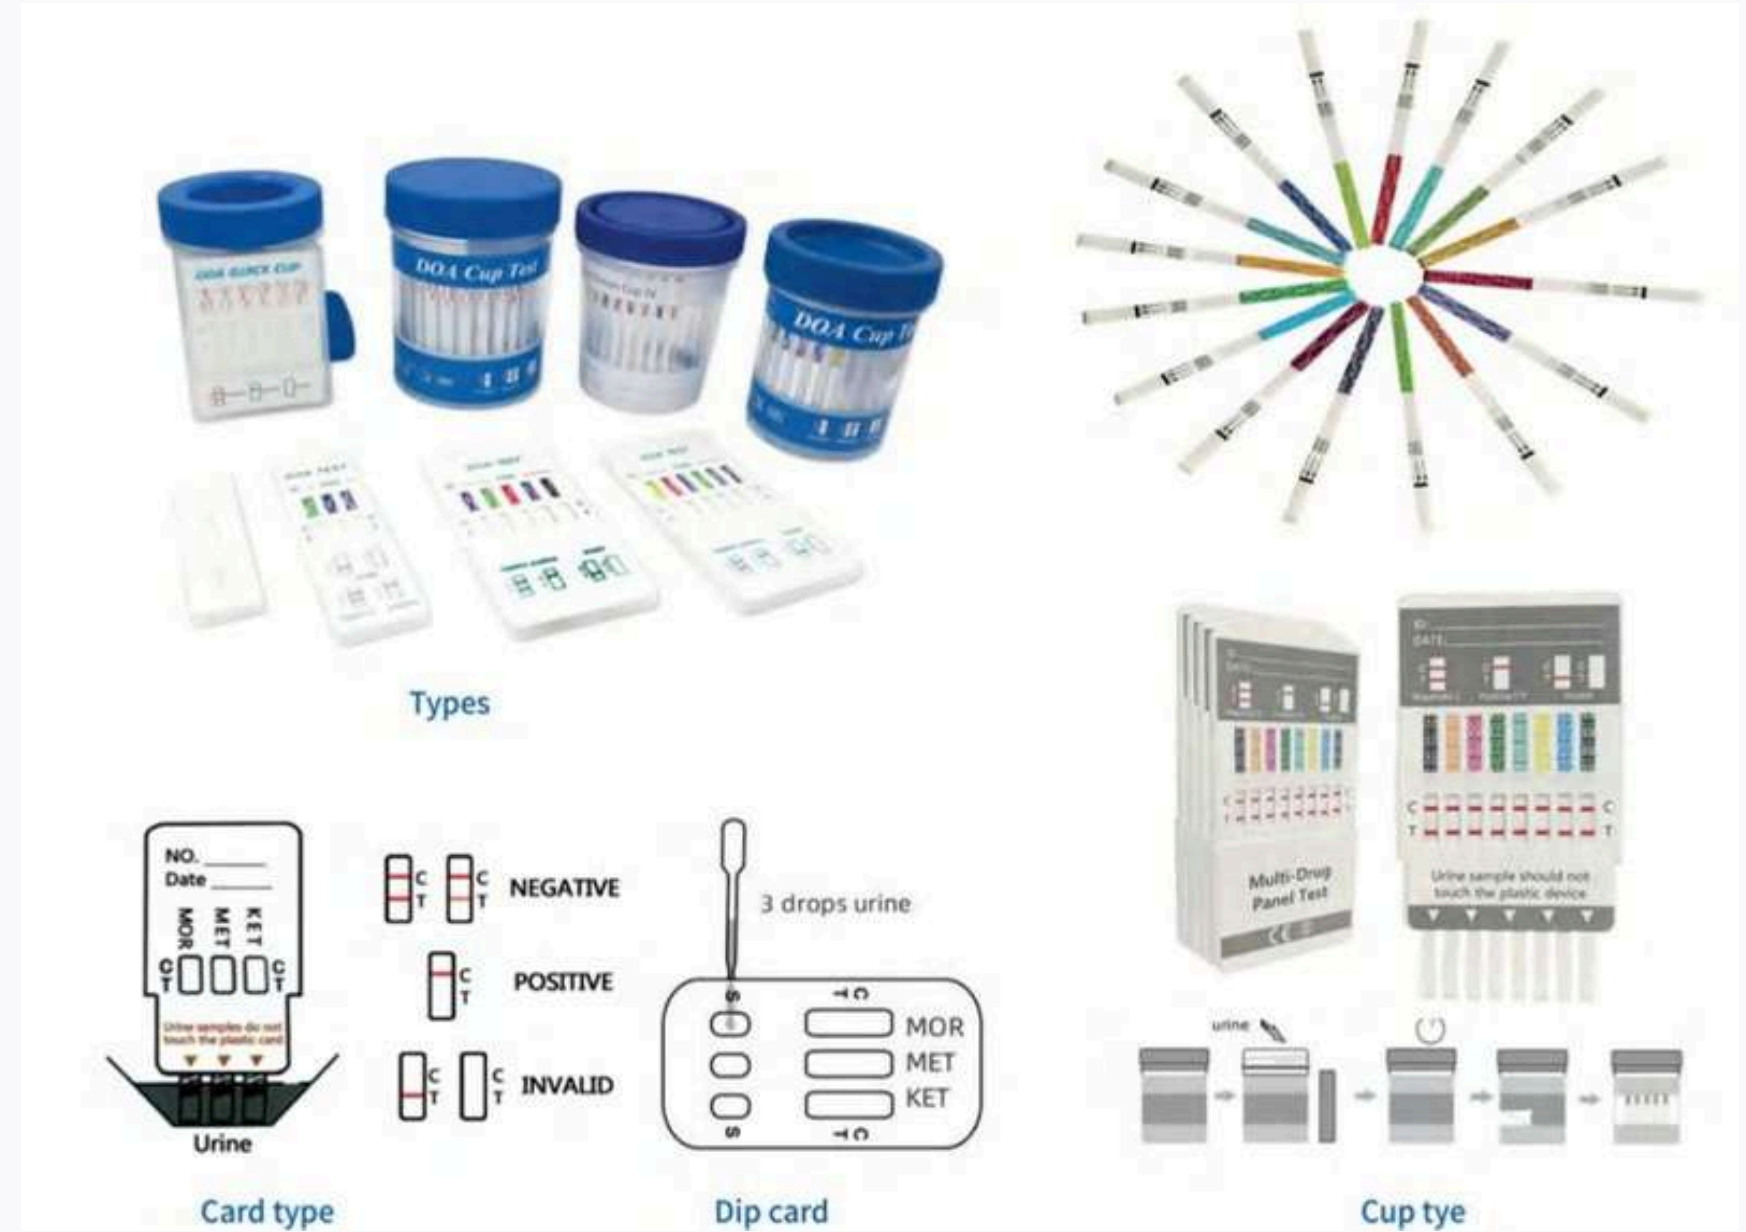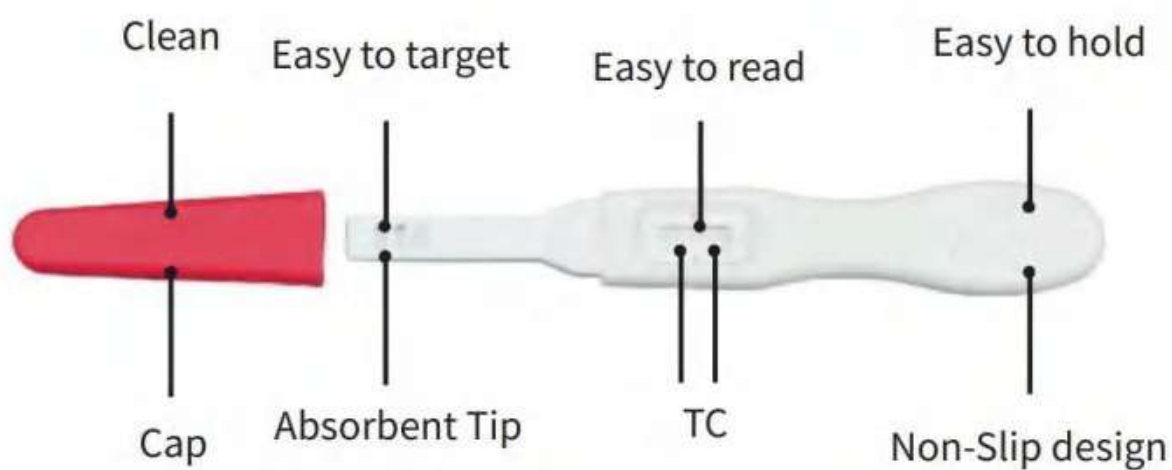

Test	Cut-off (ng/mL)
AMP(Amphetamine)	1000
THC(Marijuana)	50
COC (Cocaine)	300
PCP(Phencyclidine)	25
MOR(Morphine)	300
MET(Methamphetamine)	1000
MTD(Methadone)	300
BAR(Secobarbital)	300
BZO(Oxazepam)	300
TCA(Nortriptyline)	1000
MDMA(Ecstasy)	500
BUP(Buprenorphine)	10
EDDP(Methadone metabolite)	100
PPX (Propoxyphene)	300
ETG(Ethylglucuronide)	500
K2(Synthetic cannabis)	50
TML(Tramadol)	100
MQL(Methaqualone)	300
COT(Cotinine)	200
FYL(Fentanyl)	200
OXY (Oxycodone)	100
KET (Ketamine)	1000




Gynecological Series



Medicine Delivery Series



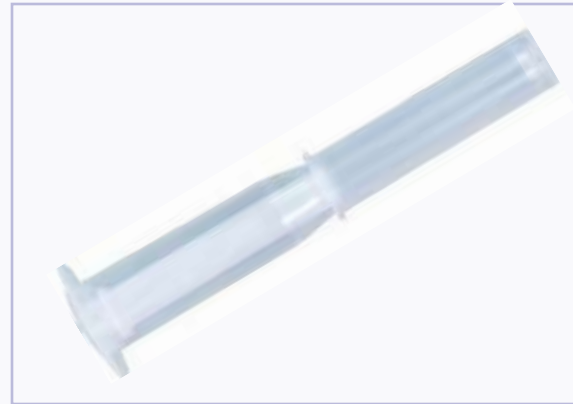

Plastic container Series



Standard Pitcher



Graduated Container Triangular



Tumbler



Bedpan Fracture



Pontoon Bedpan



Stackable Bedpan



Standard Pitcher



Drinking Cup



Nurs Cup Specimen Collector



Stackable Bedpan



Bedpan Autoclavable



Fracture Bedpan w/Lid



Urinal Male w/cover Autoclavable



Urinal Male w/clear Lid



Deluxe Female Urinal



Sitz Bath W/Grad bag



Sitz Bath Irrigator
W/Graduated PVC Bag



Sitz Bath



Unisex Urinal



Screw Cap Urinal



Screw Cap Urinal LeakProof



Emesis Basins



Rectangular Wash Basin



Tray

Nasal Irrigation Washing Device Rhinitis



- Use high-quality silicone nasal nozzles and polypropylene syringes, environmentally friendly, nontoxic,
- The silicone nasal suction nozzle and the 10ml portable syringe can easily suck out the nose of a baby or child.
- Light and small, easy to store and carry.

Nasal Wash Bottle Nasal Irrigation



- Single-hole nozzle, large flow, rapid flushing of nasal dust and other foreign bodies.
- Three-hole nozzle, fine water, large range, leaving no dead ends, rinse more comfortable.
- 60 ° gold angle design, can effectively control the flow rate, and prevent backflow.

Disposable Nasal Spray Feeding Syringe



- Super fine spray
- used for local administration to the patient's body surface and natural cavity.
- Not for subcutaneous administration and intravenous administration.

ENT Examination Kit



- 1pc Disposable Ear Funnel
- 1pc Large Disposable Nasal Speculum
- 1pc Plastic Tongue Depressor
- Can Customizable set

Wound Dressing Kit



- Composition according to your request, We can produce it with shrink package, blister package, and paper-plas
- Mainly used to clean wounds and change dressings from patients who suffered trauma.

Gynecological Examination Kit



- It is safer in the diagnosis of cervical cancer and gynecological diseases, easier to extract the cervix and cervical ministry of virus cell entry and more convenient to use.
- Easier to extract the entrance of cervical and cervical virus cells in the diagnosis of cervical cancer and gynecological diseases

■ Eye Chart Light Box



- Eye chart light box is applied to visual test during youth's health check or employment health check as well as clinical study
- Adopt LED backlighting method
- Built-in AC to DC rectifier
- Long service life-span

■ Trial Lens Set



- Trial Lens set is applied to check the refractive status(myopia, hyperopia, astigmatism) of human eyes, it is the eye examination apparatus for hospital and eyewear store to check the refractive status for human

■ Optometry Rack Set



- Optometry Rack Set(30 pcs)
- mainly made of positive and negative spherical optometry tablets

■ ENT Examination Kit




- X ray film viewer is designed for observing XRay film for medical personnel, it's applied to clinical view the medical image film.
- Adopting LED backlighting method
- Built-in AC to DC rectifier
- Long service life
- Uniform and mild light source
- Dimming light
- Ultra-thin,thickness is 25mm

■ Gauge For Ilium



- Measurement:34.2*8.2*1.2(cm)
- External diameter: 0-50(cm)
- Internal diameter :0-25(cm)

■ Electronic Spirometer

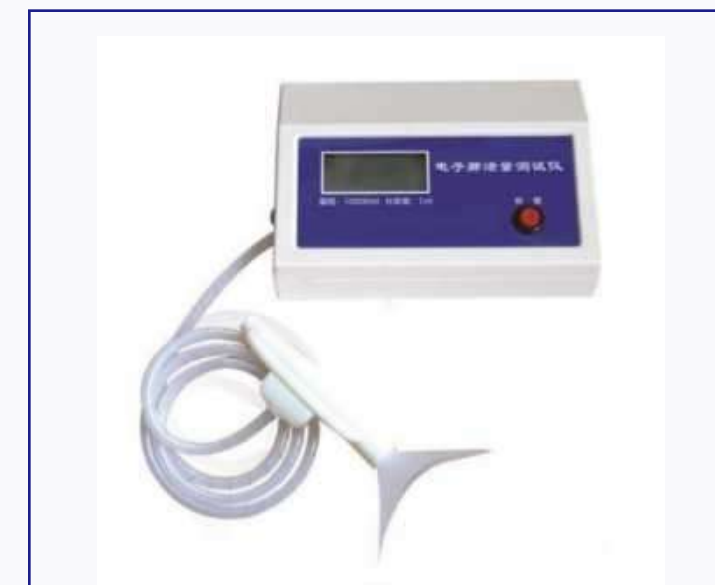

- Adopting Vaneairflowsensor
- with high performance micro-processor and sophisticate digital circuit
- sensitive High accuracy and sensitive
- Stability and low power consumption

■ Stethoscope Series



Disposable stethoscope



Wooden fetal stethoscope



Cadiology stethoscope



Sprague Rappaport Stethoscope
With Clock



Deluxe Dual Head Stethoscope
With Non-chill Ring



Deluxe Black Stethoscope




Deluxe single head stethoscope



Plastic fetal stethoscope



Acrylic stethoscope

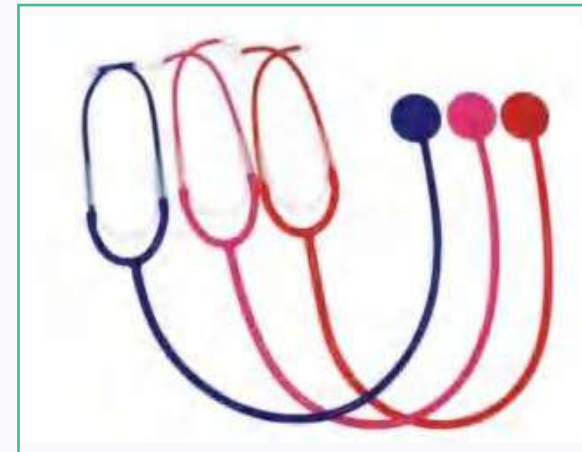

Disposable Stethoscope



Single Head Stethoscope



Single Head
Stethoscope(pediatric)



Deluxe Cadiology Stethoscope



Stainless Steel Stethoscope



Sprague Rappaport Stethoscope



Daul Head Stethoscope



Daul Head
Stethoscope(pediatric)



Single Head Stethoscope



Sprague Rappaport Stethoscope



Deluxe Dual Head Stethoscope



Deluxe Single Head Stethoscope




Single Head Stethoscope With
Non-chill Ring



Daul Head Stethoscope




Dual Head Stethoscopewith Non-
chill Ring

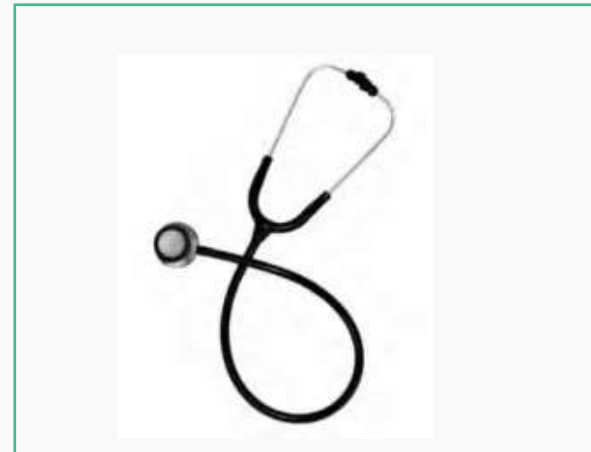

Deluxe Stainless Steel Stethoscope



Cross-shaped Membrane Lock
Stainless Steel Stethoscope

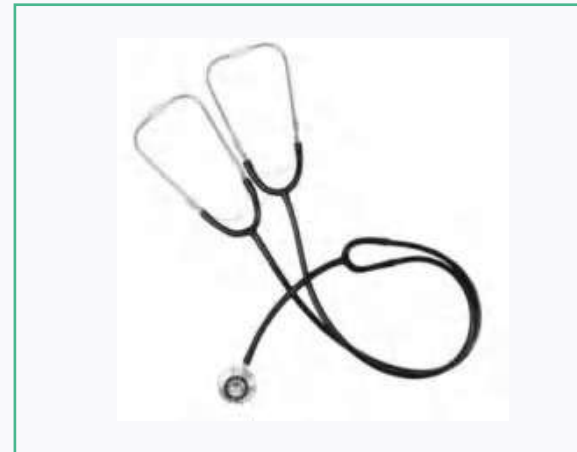

Teaching Stethoscope



Stainless Steel Stethoscope(pediatric)




Neurological Hammer



Teaching Stetoscope

■ Stethoscope Accessories

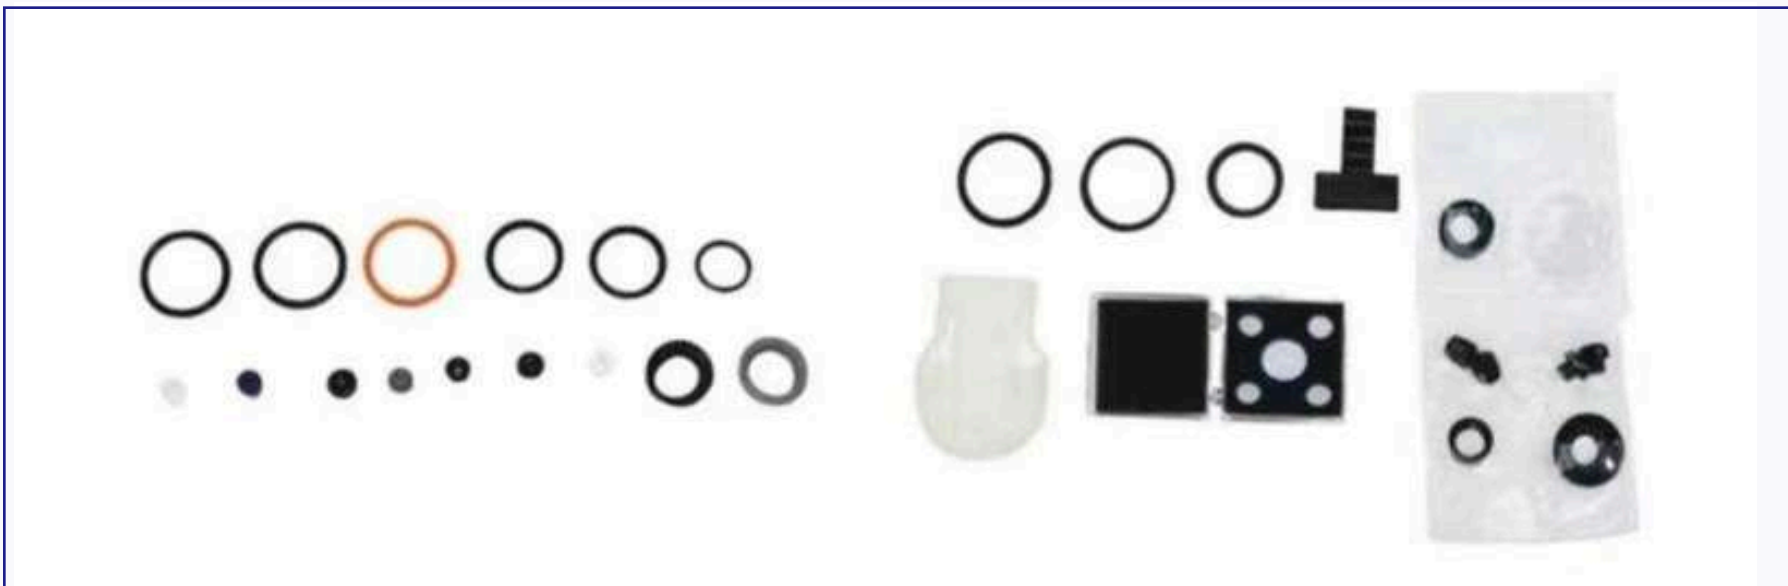

LARGE MANOMETER TYPE

Technical Features		Model No	
ABS plastic case		1023	
The dial diameter is Φ51.9mm			
Standard nylon cuff		132N-A	
2-tube adult size pvc bladder		1222-A	
Standard PVC bulb		144	
Dual use air-release valve with spring		1528	
Taper end valve		1554	
Black drawstring bag		119N	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
108*65*168	570*350*350	50	16.5/15
Additional adult cuff color options			
■ Black ■ 430U ■ 2738U ■ 296U ■ 213U			



STANDARD TYPE

Technical Features		Model No	
Special Aluminium alloy manometer		1068	
Standard cotton cuff		132C-A	
2-tube adult size PVC bladder		1222-A	
Standard PVC bulb		144	
Dual-use air-release valve with spring		1528	
Taper end valve		1554	
Vinyl zipper bag		113M	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
108*65*168	570*350*350	50	20.5/19
Additional adult cuff color options			
■ Black ■ Gray ■ Blue ■ Green			



CLASSIC TYPE

Technical Features		Model No.	
Special Aluminium alloy manometer		1068	
Classic nylon cuff		133N-A	
2-tube adult size PVC bladder		1222-A	
Standard PVC bulb		144	
Dual-use air-release valve with spring		1528	
Taper end valve		1554	
Vinyl zipper bag		113M	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
108*65*168	570*350*350	50	22.5/21
Additional adult cuff color options			
■ Black ■ 430U ■ 2738U ■ 296U ■ 213U			



CHILD KIT TYPE

Technical Features		Model No.	
Special Aluminium alloy manometer		1068	
Classic cartoon new born cotton cuff		133C-N	
Classic cartoon child cotton cuff		133C-C	
2-tube new born size PVC bladder		1222-N	
2-tube child size PVC bladder		1222-C	
Standard PVC bulb		144	
Dual-use air-release valve with spring		1528	
Taper end valve		1554	
Cartoon zipper bag with ear		115C	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
110*75*185	565*395*405	50	25/23.5



DIY TYPE

Technical Features		Model No.	
Special Aluminium alloy manometer:		1068	
Nylon cuff with D-ring		134N-A	
2-tube adult size PVC bladder		1222-A	
Standard PVC bulb		144	
Dual-use air-release valve with spring		1528	
Taper end valve		1554	
Vinyl zipper bag		113M	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
108*65*168	570*350*350	50	23.5/22
Additional adult cuff color options			
■ Black	■ 430U	■ 2738U	■ 296U ■ 213U



STANDARD SPHYGMOMANOMETER KIT

Technical Features		Model No.	
Special Aluminium alloy manometer		1068	
Nylon cuff with D-ring		134N-A	
2-tube adult size PVC bladder		1222-A	
Standard PVC bulb		144	
Dual-use air-release valve with spring		1528	
Taper end valve		1554	
Single head stethoscope		HS-30A	
Large vinyl zipper bag		113L	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
110*75*185	565*395*405	50	27.5/26
Additional adult cuff color options			
■ Black	■ 430U	■ 2738U	■ 296U ■ 213U



SPHYGMOMANOMETER KIT WITH DUAL HEAD STETHOSCOPE

Technical Features		Model No.
Special Aluminium alloy manometer		1068
Classic nylon cuff		133N-A
2-tube adult size PVC bladder		1222-A
Standard PVC bulb		144
Dual-use air-release valve with spring		1528
Taper Metal net end valve (dust filter)		1555
Dual head stethoscope		HS-30B
Nylon carrying bag		116N
Package content		
Box size (mm)	Carton size (mm)	Pcs/Ctn Kgs/Ctn
141*58*230	480*440*325	30 18.5/17
Additional adult cuff color options		
■ Black ■ 430U ■ 2738U ■ 296U ■ 213U		



HOME USE SPHYGMOMANOMETER KIT

Technical Features		Model No.
Special Aluminium alloy manometer		1068
Nylon cuff with D-ring (The stethoscope head is fixed to cuff)		1353N-A
2-tube adult size PVC bladder		1222-A
Standard PVC bulb		144
Dual-use air-release valve with spring		1528
Taper end valve		1554
Single head stethoscope		HS-30A
Large vinyl zipper bag		113L
Package content		
Box size (mm)	Carton size (mm)	Pcs/Ctn Kgs/Ctn
110*75*185	565*395*405	50 27.5/26
Additional adult cuff color options		
■ Black ■ 430U ■ 2738U ■ 296U ■ 213U		



WITH RAPPAPORT STETHOSCOPE

Technical Features		Model No.	
Special Aluminium alloy manometer		1068	
Shining nylon cuff with D-ring		134S-A	
2-tube adult size PVC bladder		1222-A	
Standard PVC bulb		144	
Deflation valve: 'Push' for rapid deflation, 'screw' for precise deflation		1524	
Taper Metal net end valve (dust filter)		1555	
Colored rappaport stethoscope		HS-30C1	
Name tag		173	
Shinning nylon carrying bag		116S	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
141*58*230	480*440*325	30	20/18.5
Additional adult cuff color options			
■ Black ■ 430U ■ 2738U ■ 296U ■ 213U			



SPHYGMOMANOMETER KIT WITH LARGE MANOMETER

Technical Features			Model No
Large special Aluminium alloy manometer			1022
Nylon cuff with D-ring			134N-A
2-tube adult size PVC bladder			1222-A
Standard PVC bulb			144
Dual-use air-release valve with spring			1528
Taper end valve			1554
Single head stethoscope			HS-30A
Large vinyl zipper bag			113L
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
110*75*185	565*395*405	50	29.5/28
Additional adult cuff color options			
■ Black	■ 430U	■ 2738U	■ 296U ■ 213U



HOLLOWED-OUT DESIGN

Technical Features		Model No.	
Unique Hollowed-out design case		1061	
The thickness is 28.4mm			
The dial's diameter is 61.9mm			
Ultra-thin one piece gauge, perfect design			
Newly designed air-release valve,			
beautiful appearance and good handle.		1391	
Nylon Bladder-less cuff			
Convenient disinfection			
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
106*80*196.5	550*413*185	20	13/12kg



SELF ADJUSTMENT

Technical Features		Model No	
ABS Plastic case and handle		1060	
The dial's diameter is 62mm			
Standard adult Nylon cuff		132N-A	
1-tube PVC bladder		1221-A	
Standard PVC bulb (2015)			
Plastic end valve		1558	
Special Vinyl Zipper case		1131	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
110*75*185	565*395*405	50	16.5/15
Additional adult cuff color options			
■ Black ■ 430U ■ 2738U ■ 296U ■ 213U			



SHOCK RESISTANT

Technical Features		Model No.	
Unique "shock resistant" case		1059	
The dial's diameter is 55mm			
High-precision air- release valve			
Professional adult nylon cuff (anti-clamp)		135N-A	
1-tube TPU bladder		1231-A	
Flat bottom PVC bulb (special for 201Y)			
Gray nylon bag		118N	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
115*80*185	425*365*395	30	13.5/12
Additional adult cuff color options			
■ Black ■ 430U ■ 2738U ■ 296U ■ 213U			



GOOD CHOICE FOR WOMEN USE

Technical Features		Model No	
Unique "shock protected" case		1058	
The dial's diameter is 55mm			
European style nylon cuff with D-ring		1341N-A	
1-tube PVC bladder		1221-A	
Special soft PVC bulb (special for 201X)			
Black nylon bag		118N	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
115*80*185	425*365*395	30	13/11.5
Additional adult cuff color options			
■ Black ■ 430U ■ 2738U ■ 296U ■ 213U			



Technical Features

Technical Features	Model No.
Nickel plated metal case	1056
The dial's diameter is 59.5mm	
Two handling modes	
Zinc-alloy handle with Nickel plated	
Male & Female connector	
European Style nylon cuff with D-ring	1341N-A
1-tube PVC bladder	1221-A
Ribbed PVC bulb	147
Taper metal net end valve(dust filter)	1555
PVC Shockproof ring	1410
Black nylon bag	118N

Package content

Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
115*80*185	425*365*395	30	17.5/16

Additional adult cuff color options

■ Black ■ 430U ■ 2738U ■ 296U ■ 213U



Technical Features

Technical Features	Model No.
Nickel plated metal case	1051
The dial's diameter is 59.5mm	
Two handling modes	
Zinc-alloy handle with Nickel plated	
Deflation valve: 'Push' for rapid deflation,	
'Screw' for precise deflation	
Classic shining nylon cuff	1335-A
1-tube PVC bladder	1221-A
Ribbed PVC bulb	147
Taper metal net end valve(dust filter)	1555
Shining nylon carrying bag	116S

Package content

Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
141*58*230	480*440*325	30	20.5/19

Additional adult cuff color options

■ Black ■ 430U ■ 2738U ■ 296U ■ 213U



Technical Features


Technical Features	Model No.
Chrome plated metal case	1041
The dial's diameter is 48mm	
Stainless steel handle	
Nylon cuff with D-ring	134N-A
1-tube PVC bladder	1221-A
Standard PVC bulb	144
Taper end valve	1554
Nylon zipper bag with ear	115N

Package content

Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
110*75*185	565*395*405	50	25/23.5

Additional adult cuff color options

■ Black ■ 430U ■ 2738U ■ 296U ■ 213U

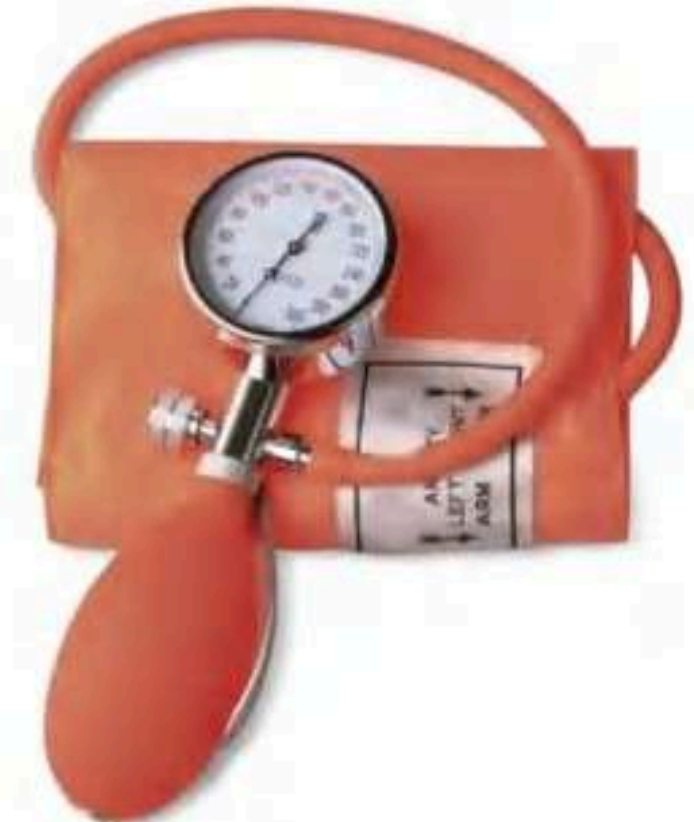

Technical Features

Technical Features	Model No.
Chrome plated metal case	1057
The dial's diameter is 48 mm	
The professional configuration with twin tube technology	
Stainless steel handle with chrome plated	
Standard cotton cuff	132C-A
2-tube adult latex bladder	1212-A
PVC bulb with end valve (special for 201B2)	
Black nylon bag	118N

Package content

Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
115*80*185	425*365*395	30	16/14.5

Additional adult cuff color options

■ Black ■ Gray ■ Blue ■ Green



Technical Features		Model No.	
ABS plastic upper case		1048	
The dial's diameter is 59.5mm			
Stainless steel handle			
Cotton cuff with D-ring		134C-A	
1-tube PVC bladder		1221-A	
Standard PVC bulb		144	
Taper end valve		1554	
Cotton zipper bag with ear		115C	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
110*75*185	565*395*405	50	25/23.5
Additional adult cuff color options			
■ Black ■ Gray ■ Blue ■ Green			



Technical Features			Model No
ABS plastic for case and handle			1053
The dial's diameter is 64.5mm			
Three handling modes			
European style Nylon cuff with D-ring			1341N-A
1-tube PVC bladder			1221-A
Flat bottom PVC bulb (special for 201T)			
Plastic end valve			1558
Nylon carrying bag			116N
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
141*58*230	480*440*325	30	17/15.5
Additional adult cuff color options			
■ Black	■ 430U	■ 2738U	■ 296U ■ 213U



Patent Protection

Technical Features		Model No.	
ABS plastic upper case		1049	
The dial's diameter is 60.2mm			
Two handling modes			
Large Zinc-alloy handle with black powder-coating			
Deflation valve: 'Push' for rapid deflation, 'screw' for precise deflation			
Nylon cuff with D-ring		134N-A	
1-tube PVC bladder		1221-A	
Ribbed PVC bulb		147	
Taper metal net end valve(dust filter)		1555	
Silicone shockproof ring		1412	
Nylon carrying bag		116N	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
141*58*230	480*440*325	30	20.5/19
Additional adult cuff color options			
■ Black ■ 430U ■ 2738U ■ 296U ■ 213U			



Technical Features		Model No	
Chrome plated plastic case		1043	
The dial's diameter is 60.2mm			
Stainless steel handle			
Cotton cuff with D-ring		134C-A	
1-tube PVC bladder		1221-A	
Standard PVC bulb		144	
Taper end valve		1554	
Large vinyl zipper bag		113L	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
110*75*185	565*395*405	50	24/22.5
Additional adult cuff color options			
■ Black ■ Gray ■ Blue ■ Green			



SPHYGMOMANOMETER FOR EMERGENCY USE

Technical Features		Model No.	
Palm type sphygmomanometer		1043	
Classic shining nylon cuff for			
child/adult/large adult		133S-C/A/LA	
1-tube PVC bladder for child/adult/ large adult		1221-C/A/LA	
Standard PVC bulb		144	
Taper end valve		1554	
Shining nylon carrying bag		1165	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
265*235*55	560*500*305	20	17.5/16



PALM TYPE SPHYGMOMANOMETER SERIES (2-TUBE)

Package content				
Model	Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
HS-201A2	110×75×185	565×395×405	50	26.5/25
HS-201C2	110×75×185	565×395×405	50	25.5/24
HS-201Q2	141×58×230	480×440×325	30	22/20.5



SPHYGMOMANOMETER FOR EMERGENCY USE

Technical Features		Model No.	
Palm type sphygmomanometer		1048	
Orange silicone shockproof ring			
Orange cup of air release valve			
Male & Female connector			
Classic nylon cuff for infant/child/ adult/large adult/thigh		133N-I/C/A/LA/T	
1-tube pvc bladder for infant/child/ adult/large adult/thigh		1221-I/C/A/LA/T	
Standard PVC bulb		144	
Taper end valve		1554	
Big orange carrying bag		LD-FB-005	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
460*90*255	480*470*280	5	7.5/6.5



ABS DESK / WALL TYPE

Technical Features		Model No.	
Round shaped dial $\Phi 113$ mm		1074	
Special precise mechanism			
The back plastic basket is a holder for cuff			
Nylon cuff with D-ring		134N-A	
2-tube adult TPU bladder		1232-A	
Standard latex bulb		142	
Dual-use air-release valve with spring		1528	
Standard end valve		1551	
Spiral PVC tube (1.4m)		1413	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
138*138*175	715*800*195	10	7.5/6
Additional adult cuff color options			
■ Black ■ 430U ■ 2738U ■ 296U ■ 213U			



ABS DESK / WALL TYPE

Technical Features		Model No.	
Square shaped dial 145mmx145mm		1070	
Gradient adjustable for easy reading			
Standard cotton cuff		132C-A	
2-tube adult latex bladder		1212-A	
Standard latex bulb		142	
Dual-use air-release valve with spring		1528	
Standard end valve		1551	
Spiral PVC tube (1.8m)		1413	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
185*162*180	820*390*205	10	10.5/9
Additional adult cuff color options			
■ Black ■ Gray ■ Blue ■ Green			



ABS WALL TYPE WITH ABS BASKET

Technical Features		Model No.	
Round shaped dial $\Phi 147$ mm		1073	
Special precise mechanism			
180°direction adjustability for easy reading			
The back plastic basket is a holder of cuff			
Nylon cuff with D-ring		134N-A	
2-tube adult latex bladder		1212-A	
Standard latex bulb		142	
Dual-use air-release valve with spring		1528	
Standard end valve		1551	
Spiral PVC tube (1.8m)		1413	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
215*150*215	795*445*240	10	12/10.5
Additional adult cuff color options			
■ Black ■ 430U ■ 2738U ■ 296U ■ 213U			



STANDING TYPE WITH METAL BASKET

Technical Features		Model No.	
Square shaped dial 145mmx145mm		1080	
Stainless steel castors & tube			
High stability			
360°swivel for easy reading			
Gradient adjustable for easy reading			
Adjustable height (90 cm to 133cm)			
Metal basket			
Cotton cuff with D-ring		134C-A	
2-tube adult latex bladder		1212-A	
Standard latex bulb		142	
Dual-use air-release valve with spring		1528	
Standard end valve		1551	
Spiral PVC tube (1.8 m)		1413	
Plastic connector		1567	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
/	750*220*205	1	N/A



STANDING TYPE WITH METAL BASKET

Technical Features		Model No.	
Square shaped dial 145mmx145mm		1079	
Super-lower-gravity plastic castors			
High stability			
360°swivel for easy reading			
Gradient adjustable for easy reading			
Adjustable height			
(90 cm to 135 cm)			
Metal basket			
Cotton cuff with D-ring		134C-A	
2-tube adult latex bladder		1212-A	
Standard latex bulb		142	
Dual-use air-release valve with spring		1528	
Standard end valve		1551	
Spiral PVC tube (1.8 m)		1413	
Plastic connector		1567	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
/	800*320*167	1	4/3.2



STANDING TYPE WITH ABS BASKET

Technical Features		Model No.	
Square shaped dial 145mmx145mm		1075	
Metal castors			
360°swivel for easy reading			
Gradient adjustable for easy reading			
5-wheel with brake			
Adjustable height			
(85 cm to 125 cm)			
Plastic basket			
Cotton cuff with D-ring		134C-A	
2-tube adult latex bladder		1212-A	
Standard latex bulb		142	
Dual-use air-release valve with spring		1528	
Standard end valve		1551	
Spiral PVC tube (1.8 m)		1413	
Plastic connector		1567	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
/	575*495*160	1	5.5/4



STANDING TYPE WITH ABS BASKET

Technical Features		Model No.	
Round shaped dial Ø147 mm		1078	
Metal castors			
360°swivel for easy reading			
5-wheel with brake			
Adjustable height			
(95 cm to 135 cm)			
plastic basket			
Nylon cuff with D-ring		134N-A	
2-tube adult latex bladder		1212-A	
Standard latex bulb		142	
Dual-use air-release valve with spring		1528	
Standard end valve		1551	
Spiral PVC tube (1.8m)		1413	
Plastic connector		1567	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
/	575*495*160	1	5.5/4



STANDING TYPE WITH METAL BASKET

Technical Features		Model No.	
Square shaped dial 145mmx145mm		1076	
Metal castors			
360°swivel for easy reading			
Gradient adjustable for easy reading			
5-wheel with brake			
Adjustable height			
(90 cm to 125 cm)			
Metal basket			
Cotton cuff with D-ring		134C-A	
2-tube adult latex bladder		1212-A	
Standard latex bulb		142	
Dual-use air-release valve with spring		1528	
Standard end valve		1551	
Spiral PVC tube (1.8 m)		1413	
Plastic connector		1567	
Package content			
Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
/	575*495*160	1	5.5/4



Specification

- Direct illumination
- 3x magnification for the viewing window
- 2.4mm/3mm/4mm/5mm ear tips of two sets
- The clip with integrated on/of switch
- 3200k and 6000k color temperature LED bulb and XHL Xenon Halogen bulb are optional
- Colors are optional

Package content

Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
193*102*32	400*215*195	20	4.9/4.5

Gross and net weight (Kgs/Ctn) Battery containing



Direct illumination



Color optional (HS-OT10)

Specification

- Direct illumination
- 3x magnification for the viewing window
- 2.4mm/3mm/4mm/5mm ear tips of two sets
- The clip with integrated on/of switch
- 3200k and 6000k color temperature LED bulb and XHL Xenon Halogen bulb are optional
- Standard handle handy and convenient
- The clip with integrated on/off switch

Package content

Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
190*110*40	400*240*230	20	7.6/7.1

Gross and net weight (Kgs/Ctn) Battery not included



Direct illumination



Specification

- Fiber optic illumination
- 3x magnification for the viewing window
- 2.4mm/3mm/4mm/5mm ear tips of two sets
- 3200k and 6000k color temperature LED bulb and XHL Xenon Halogen bulb are optional

Package content

Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
190*110*40	400*240*230	20	6.8/6.3



Fiber optic illumination



Specification

- Fiber optic illumination
- 3x magnification for the large size viewing window
- 2.4mm/3mm/4mm/5mm ear tips of two sets
- The socket of ear insufflation bulb
- 3200k and 6000k color temperature of LED bulb and XHL Xenon Halogen bulb are optional

Package content

Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
190*110*40	400*240*230	20	7.0/6.5

Gross and net weight (Kgs/Ctn) Battery not included



Color optional (HS-OT10)



Specification

- Coaxial parallel light principle
- 5 different apertures
- 19 kinds of adjustable corrective lenses, Range of lenses: -20d~+20d
- 4000k color temperature LED bulb and XHL Xenon Halogen bulb are optional
- The clip with integrated on/off switch
- Standard handle, handy and convenient

Package content

Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
190*110*40	400*240*230	20	6.5/6.0

Gross and net weight (Kgs/Ctn) Battery not included



Color optional (H5-0P10)

Specification

- Coaxial parallel light principle
- 6 different apertures with red-free filter & blue filter they can be switched
- 29 kinds of adjustable corrective lenses, Range of lenses: -35d~+40d
- 4000k color temperature LED bulb as light source
- Li-ion rechargeable battery so long life
- Micro USB charger interface so convenient charging
- Deluxe metal handle, strong and durable

Package content

Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
200*140*57	420*300*320	20	10.0/9.5

Gross and net weight (Kgs/Ctn) Battery containing



Specification

- Optical glass lens and 5 different apertures
- 19 kinds of adjustable corrective lenses, Range of lenses: -20d~+20d
- Supplied by 2xAA alkaline batteries (not included)
- The deluxe LCD screen handle can adjust the brightness of the light source
- Optical SMT LED technology, low power consumption and long life
- Built-in instant current IC circuit, The light effect is more stable
- 3200k color temperature of warm white light
- CRI>90%, ensure the real image

Package content

Box size (mm)	Carton size (mm)	Pcs/Ctn	Kgs/Ctn
190*110*40	400*240*230	20	6.5/6.0

Gross and net weight (Kgs/Ctn) Battery not included



Medical Models Series



33203 人体骨骼模型 (170cm)
Human skeleton model (170cm)



33203-1 人体骨骼模型 (170cm)
Human skeleton model (170cm)




33204 人体骨骼模型
Human skeleton model



39051 儿童骨骼模型
Children skeleton model



XY-203-1 50cm两性人体半身模型
50cm Two sexes half-length human model

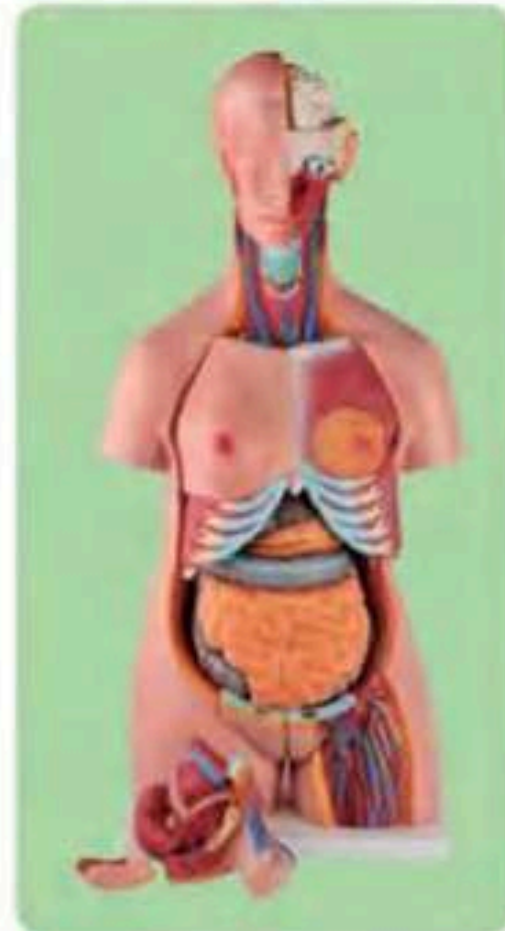

XY-203 85cm两性人体躯干模型
85cm Two sexes human torso model



33208 心脏解剖模型 自然大
Heart anatomy model (life size)



33207 心脏解剖模型 3倍大
Heart anatomy model (3X)



3304 大心脏模型
Giant heart model (large)



3305 心脏解剖模型 5倍大
Heart anatomy model (5X)



336 透明人体模型
Transparent human model



33201 人体头、颈躯干模型
Human head, neck, torso model



39053 少年人体半身模型
Half-length human model



33219 人体肌肉模型
Human muscle model



XY-305 大牙模型
Giant teeth model



SM-M024 门齿、犬齿和臼齿
Incisor, canine teeth and molar



XY-353 内耳迷路放大模型
The inner eye enlarged model



33211 脑解剖模型
Brain anatomy model



33211-1 脑解剖模型
Brain anatomy model



SM-M001 脑功能区域模型
Brain with different functional area



XY-309 鼻解剖模型
Nasal anatomical model



3315 脑干放大模型
Brain stem enlargement model




160 支气管模型
Bronchial model



3329 肾解剖模型
Renal anatomy model



33216 肝、十二指肠、胰脏模型
Liver and duodenum, pancreas model

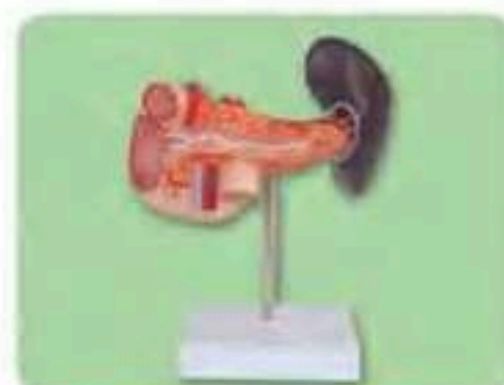

SM-M010 胰腺、十二指肠和脾脏
Pancreas, duodenum and spleen



33210 肺泡模型
Alveolar model



33212-1 耳解剖模型 (3X)
Ear anatomy model (3X)



33212 耳解剖模型 (6X)
Ear anatomy model (6X)



337-1 牙保健模型
Dental care model



39052 儿童牙列模型
Children's teeth model




33221 牙列及磨齿解剖模型
Teeth and gear grinding anatomical model



33215 立体皮肤结构模型
Skin structure model



33215-1 皮肤结构模型
Skin Structure Model

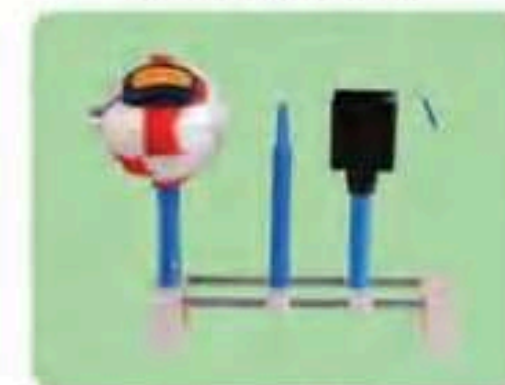

33206 眼球仪
Eye model



33205 眼球解剖模型
Eye anatomy model



39054 眼构造模型
Eye structure model




SM-M016 眼球模型 (带眼眶)
Eye model (with orbita)



SM-M006 听小骨
Auditory ossicles (malleus, incus, stapes)



SM-M017 膀胱模型
Bladder model

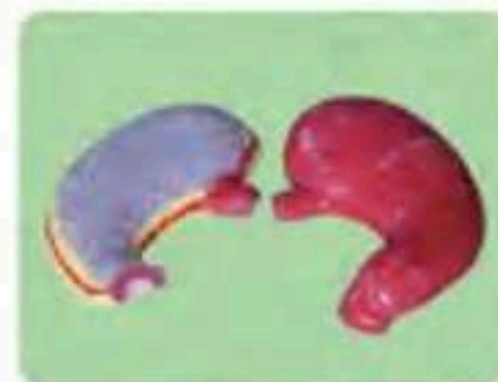

33222 胃解剖模型
Stomach anatomy model



SM-M018 睾丸模型
Testis model



33209 喉解剖模型
Laryngeal anatomy model



SM-M011 头示咽肌模型
Head with pharynx muscles



3308 脊椎与椎骨模型
Spine and vertebrate model



161 透明肺泡模型
Alveolar model



SM-M037 肺对比模型
Ung comparison model



SM-M013 头颈模型
Model of head neck



SM-M014 人体纵隔模型
Mediastinum model



SM-M019 女性盆腔解剖模型
Block model of female pelvis with 8weeks old embryo



SM-M020 男性会阴神经血管模型
Male perinum



SM-M022 人体直肠肛管解剖模型
Rectum and anal canal



SM-M012 颈部神经模型
Model of nerves at neck region



SM-M005 人体纵隔切面模型
Cross section through heart level



XY-320 喉、心、肺模型
Larynx heart and lung model




SM-M023 盲肠和阑尾
Caecum and appendix



SM-M030 骶骨和尾骨模型
Sacrum and coccyx model



SM-M008 骨质疏松模型
Osteoporosis model

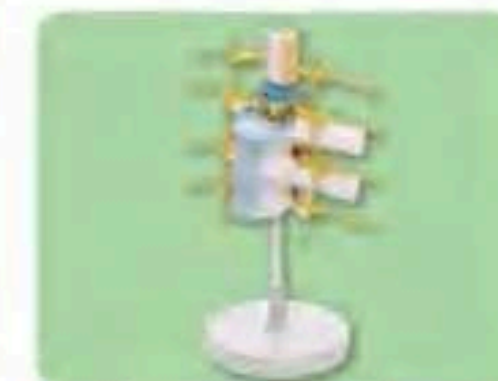

SM-M002 脊髓和脊神经、脊髓神经模型
Model of vertebrae, spinal cord, spinal nerve and sympathetic column



SM-M025 脊髓颈椎枕骨模型
Cervical vertebrae occipital bone with spinal cord



SM-M026 腰椎带尾椎骨模型
Lumbar vertebra, sacrum bone with spinal nerves



SM-M027 胸椎带脊髓模型
Thoracic vertebrae with spinal cord



SM154 彩色自然大头骨模型
Color natural giant skull model



SM155 自然大头骨模型
Natural giant skull model



XY-451 新生儿护理 (男、女)
Newborn baby for nursing (boy, girl)



33213 男性泌尿生殖系统模型
Male urogenital system model



33214 女性泌尿生殖系统模型
Female urogenital system model



XY-453 头部穴位模型
Head acupuncture point model



SM160 人体针灸模型(48CM女性)
Human body acupuncture model
(48cm, female)



33220 肘关节活动模型 Elbow model



33226 护理人模型 Demonstration model for nursing



SM-M004 蝶骨
Sphenoid bone



3339 男性骨盆模型
Male pelvis model



3340 女性骨盆模型
Female pelvis model



3338 第四第五腰椎模型
Model of pelvis with 4th and 5th



3337 女性骨盆及盆底肌肉模型
Female pelvis and pelvic floor muscle
model



SM-M007 骨盆附腰椎与股骨头模型
Model of pelvis with 4th, 5th lumbar
vertebra and femur head



SM156 正常腰椎组合(四节)
Normal lumbar spine (4 parts)



SM156-1 正常腰椎组合(三节)
Normal lumbar spine (3 parts)



SM156-2 正常腰椎组合(二节)
Normal lumbar spine (2 parts)



SM159 按摩足 (12CM)
Foot massage (12CM)



XY-323 手掌解剖模型
Palm anatomic model



SM161 自然大骨盆带五节腰椎模型
Five lumbar pelvic girdle model
(Natural size)

■ Disposable Scalpel



- Disposable scalpel
- Blade: (A) carbon steel, (B) stainless steel;
- Blade size(#): 10, 11, 12, 12d, 13, 14, 15, 15C, 16, 18, 19, 20, 21, 22, 23, 24, 24d, 25, 26, 27, 34, 36, 36d;
- Plastic handle;

■ Surgical Blade



- (A) Carbon Steel, (B) Stainless Steel;
- Size(#): 10, 11, 12, 12d, 13, 14, 15, 15C, 16, 18, 19, 20, 21, 22, 23, 24, 24d, 25, 26, 27, 34, 36, 36d;

■ Scalpel Handle (Stainless Steel)



- Size: #3 (For Blade 10# - 17#),
- #4 (For Blade 18# - 36#);

■ Stitch Cutter




- (A) carbon steel, (B) stainless steel;
- Size: 65mm, 110mm;

■ Gouge Blade



- (A) carbon steel, (B) stainless steel;
- Size(#): 1, 2, 3, 4, 5, 6, 7, 8, 9, 10;

■ Skin Graft Knife Blade

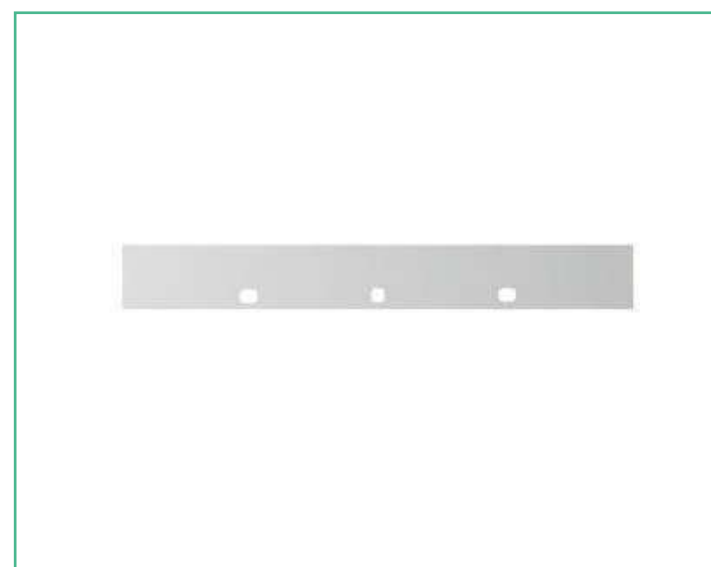


- Exquisite workmanship, stable cutting edge
- It is produced by the new automatic knife edge grinding machine
- Safe and hygienic, easy to use


Nasal Irrigation Washing Device Rhinitis




Multi-function drill

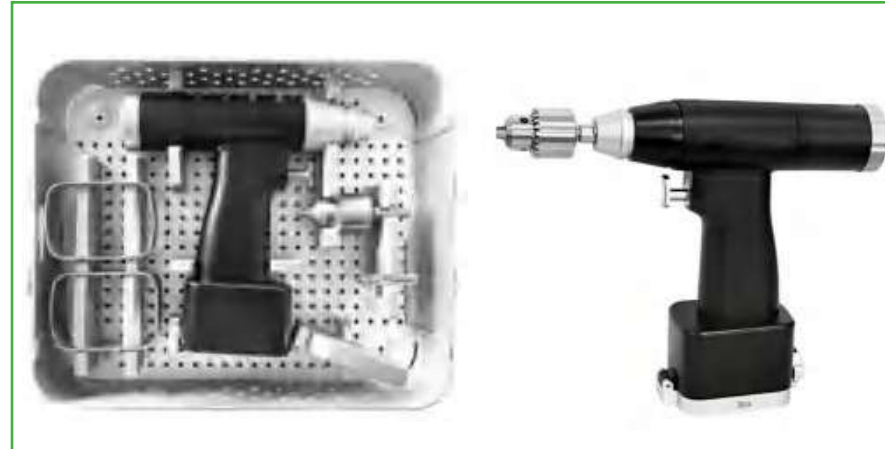


Bone drill

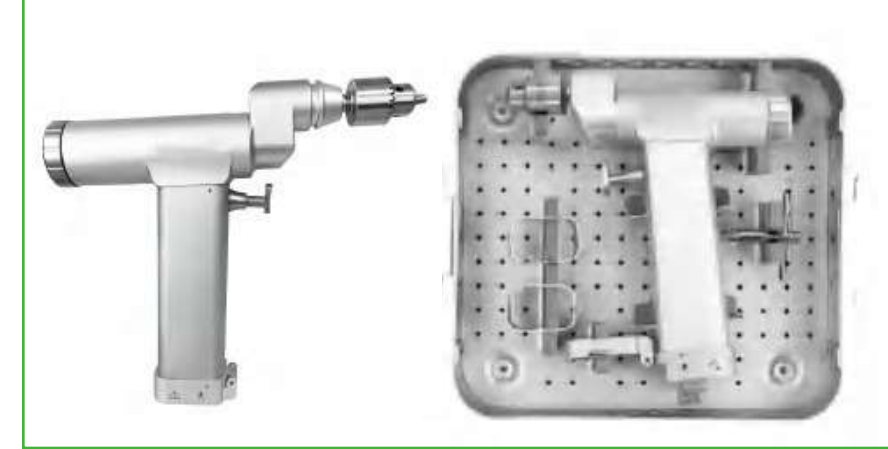


Hollow electric drill

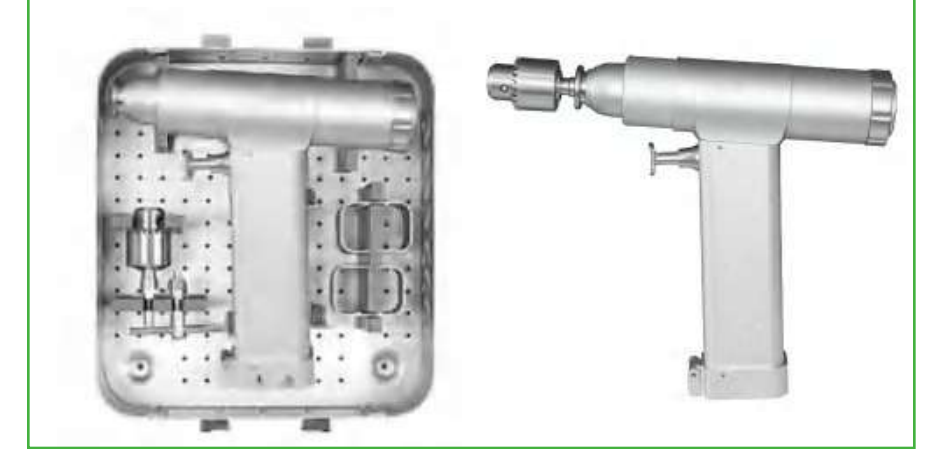


Bone drill

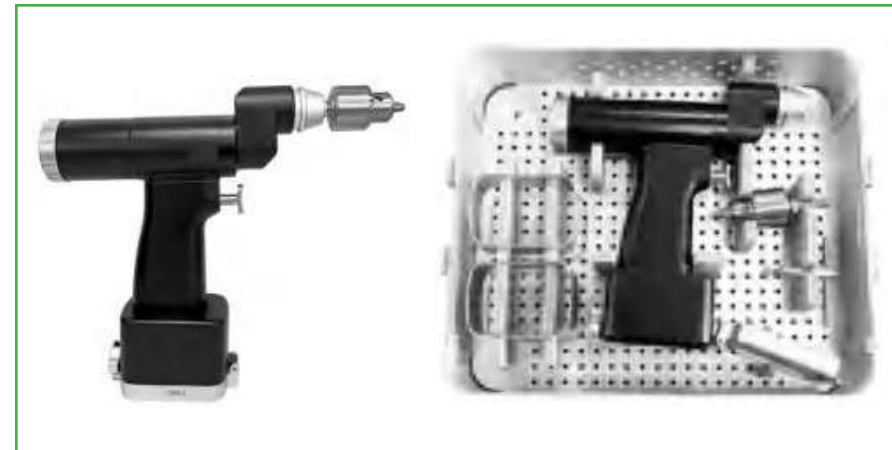


Hollow electric drill

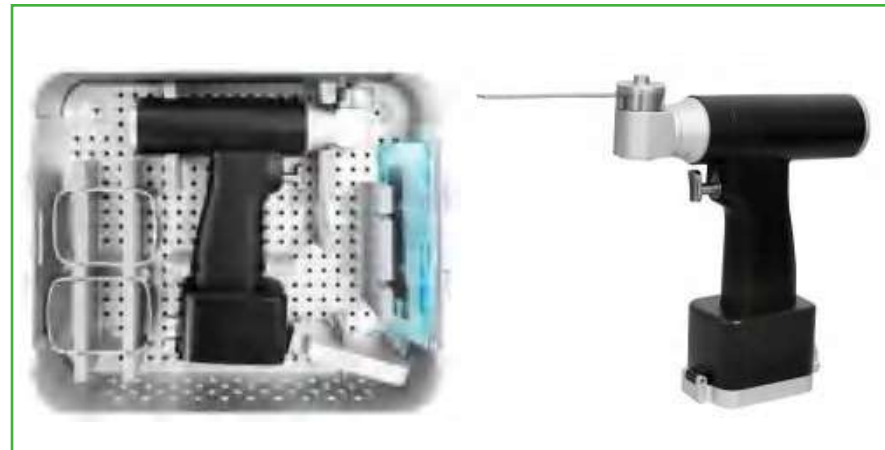


J shape saw

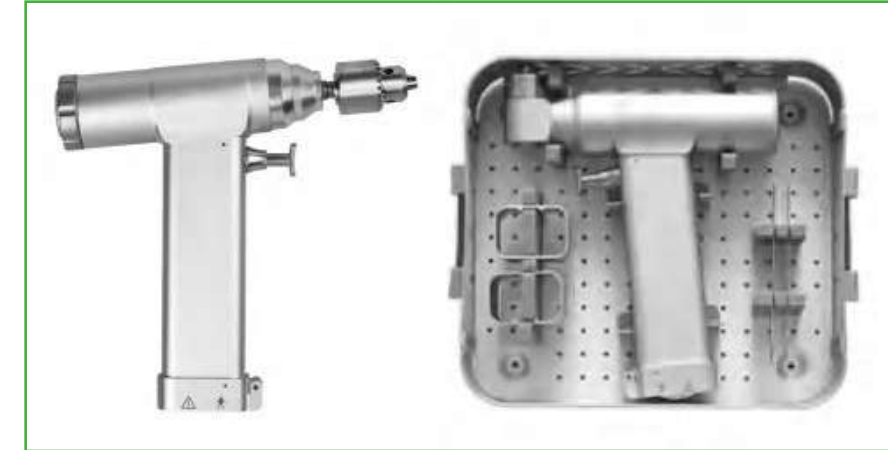

Bone drill

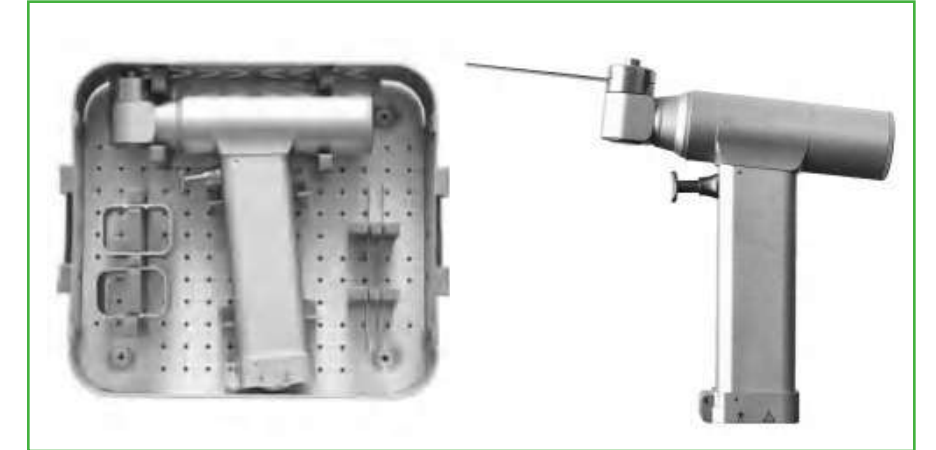

J shape saw

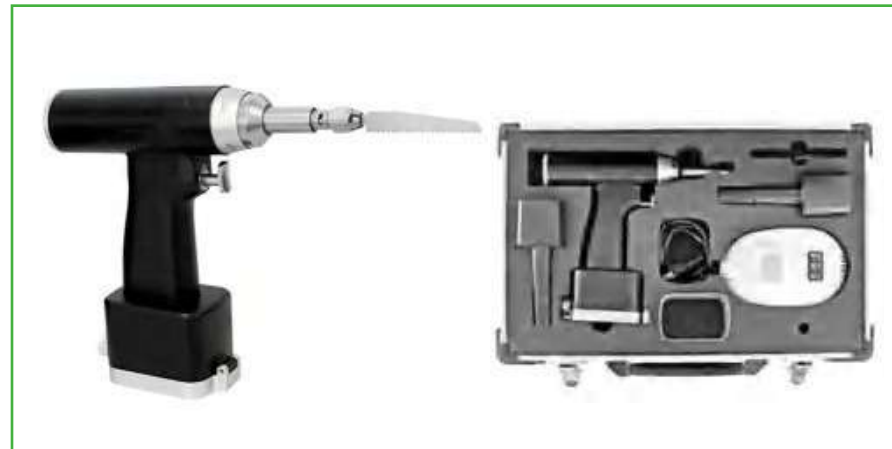

w reciprocating saw




Multi-function drill




Gypsum saw



Blade of saw J & D

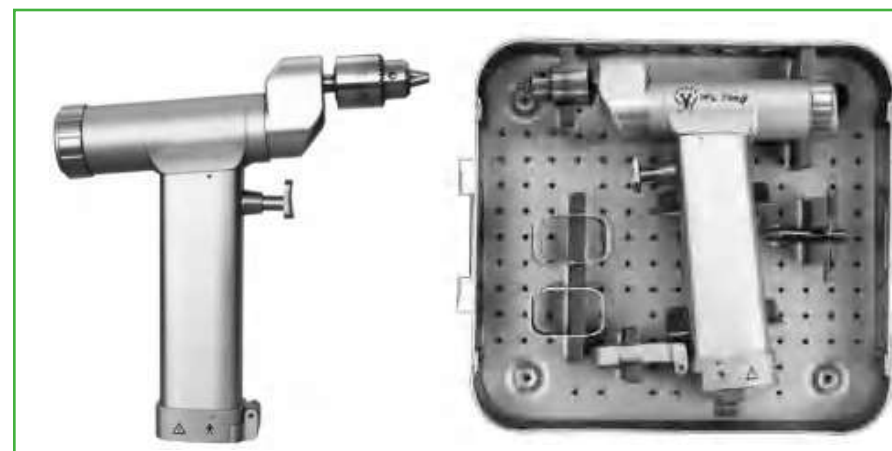


Hollow electric drill

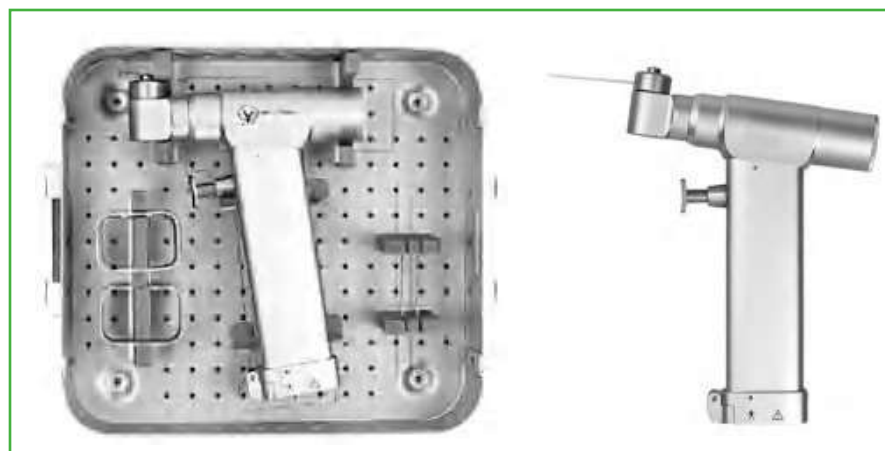

miniature saw




Blade of saw

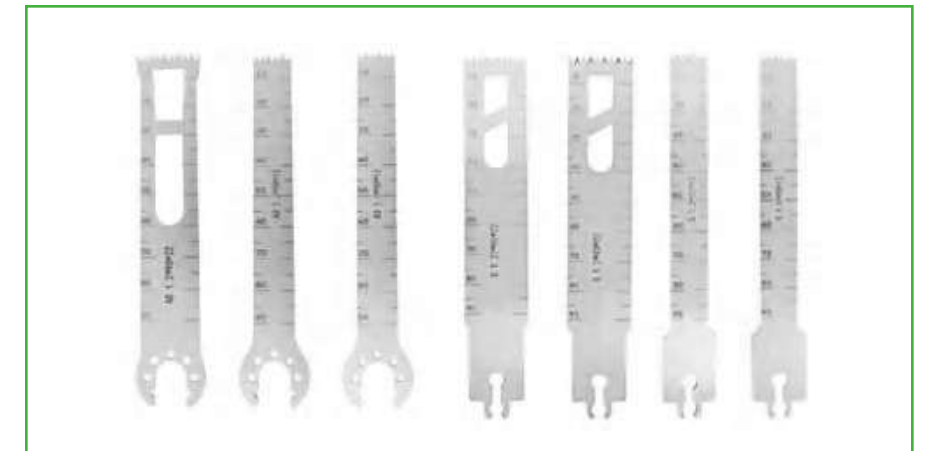

Blade of saw

■ sports medicine

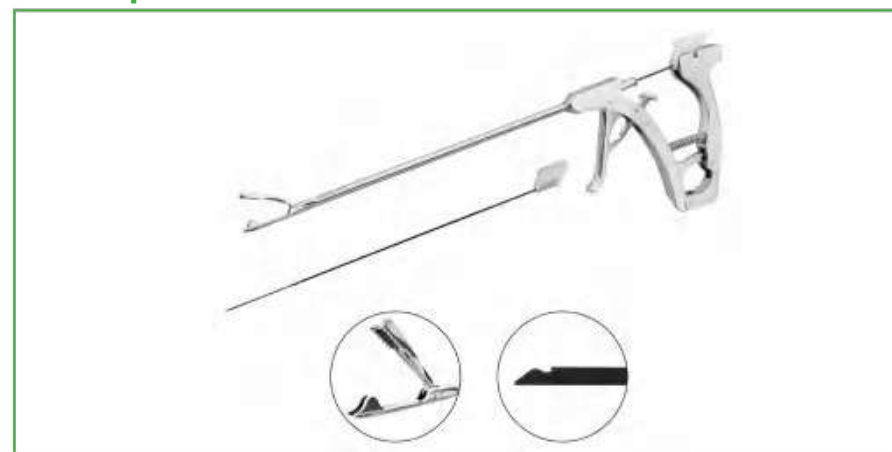


Stitching Gun



Tendon Forceps




Hold Wire Forceps

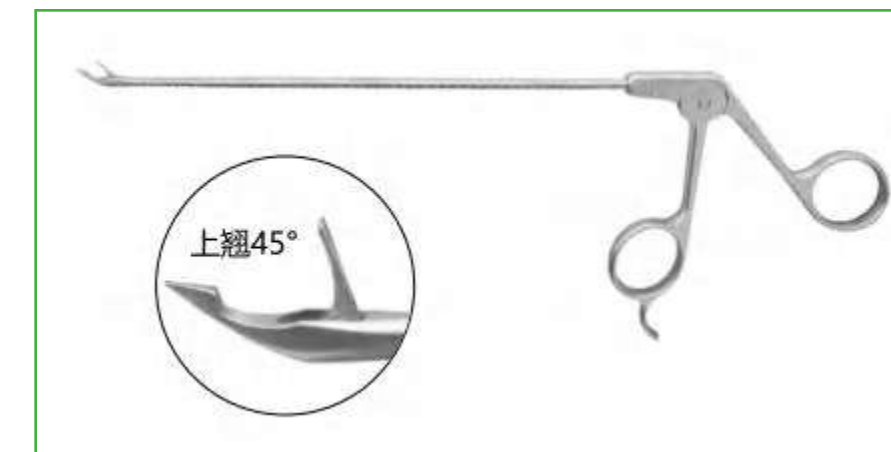

Hold Wire Forceps



Cut Wire Forceps

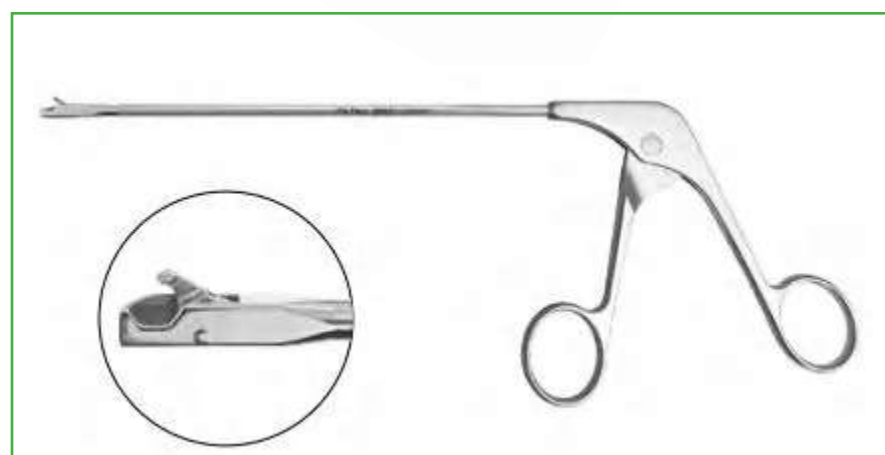

Cut Wire Forceps



Hold Wire Forceps




Hold Wire Forceps




Cut Wire Forceps



Hold Wire Forceps

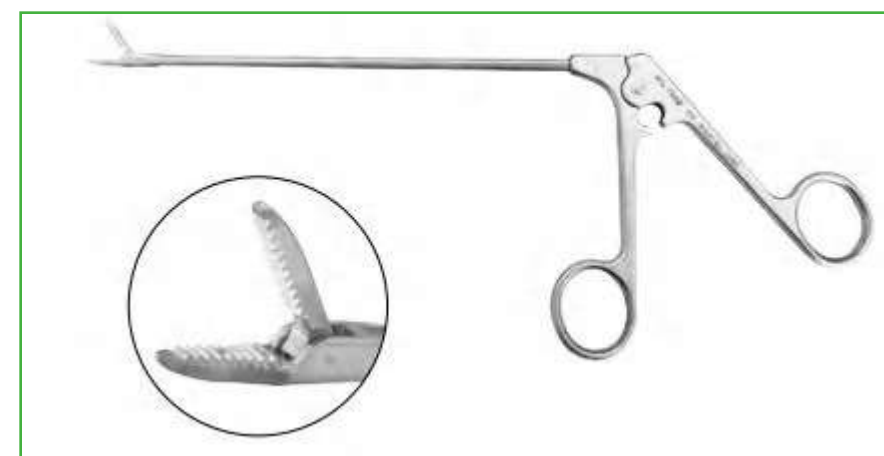

Hold Soft tissue Forceps

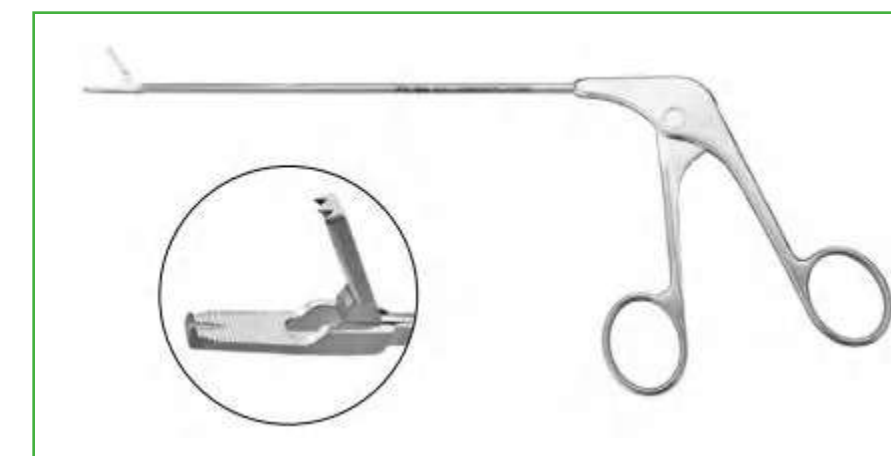

Hold Soft tissue Forceps




Hold Wire Forceps



Hold Wire Forceps



Ligament scissors

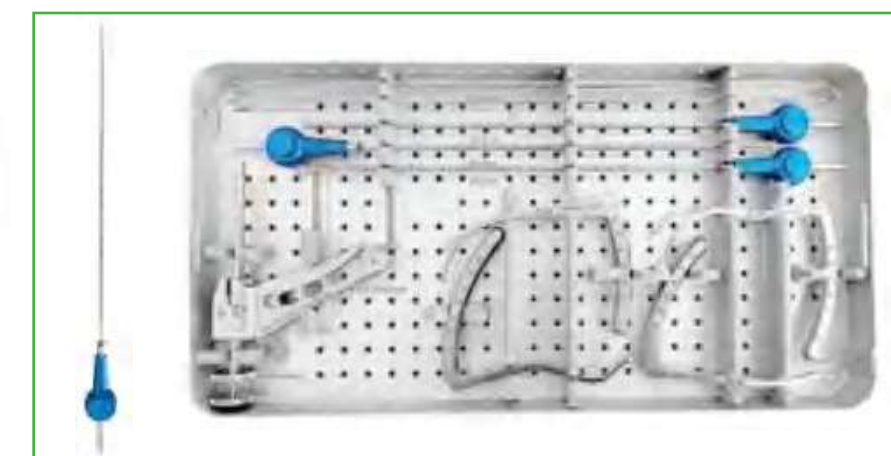


Metal bone drilling needle



Ligament (tendon) Closed meter



Ligament (tendon) opening meter

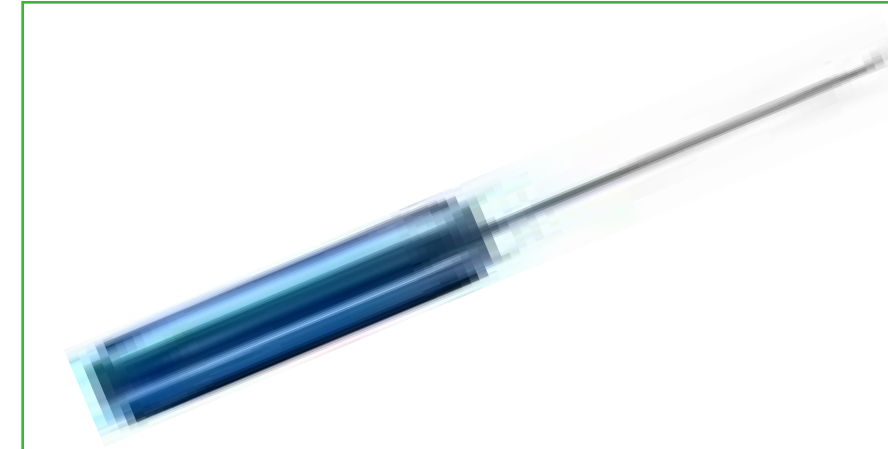

Round back file



PCL (rear fork) protector



Femoral guide (sight)



Closed tendon-removing device



Double curved curette



Double curved flat file



Open the tendon-removing device



Depth sounding device



Double needle guide right



Double needle guide left



Flat file



Round file



Crochet (probe hook)



Sheath insertion device



Ligament expander



Multiple beam separator



Bone hammer



T-shaped quick-fit handle



Interface nailing device






Interface nailing device





Interface nailer type II





Interface nail on the nail/ratchet handle

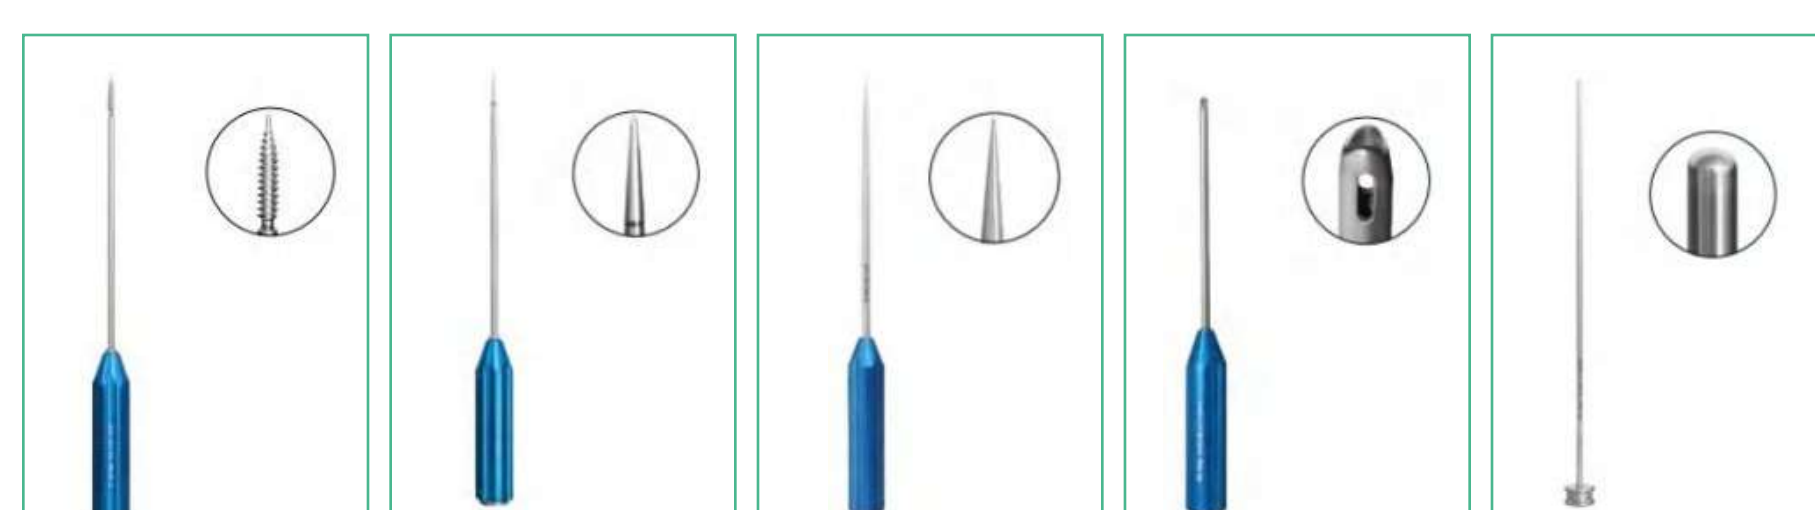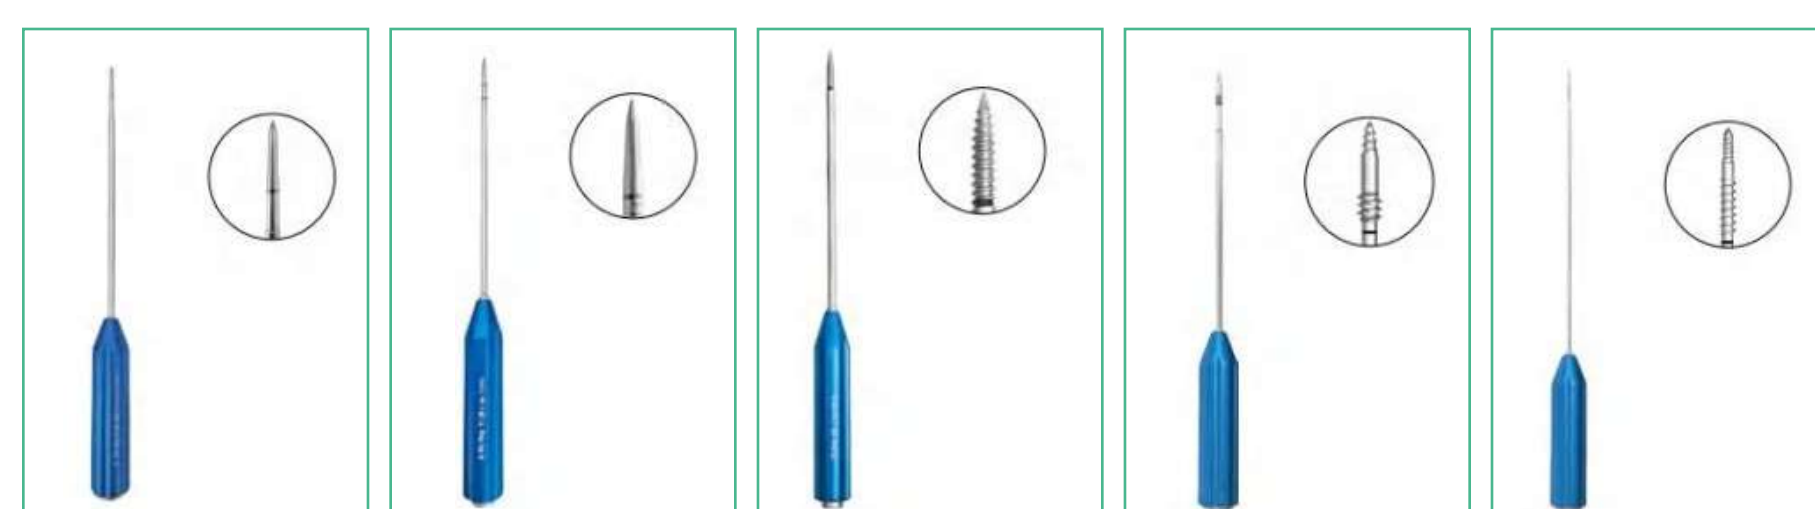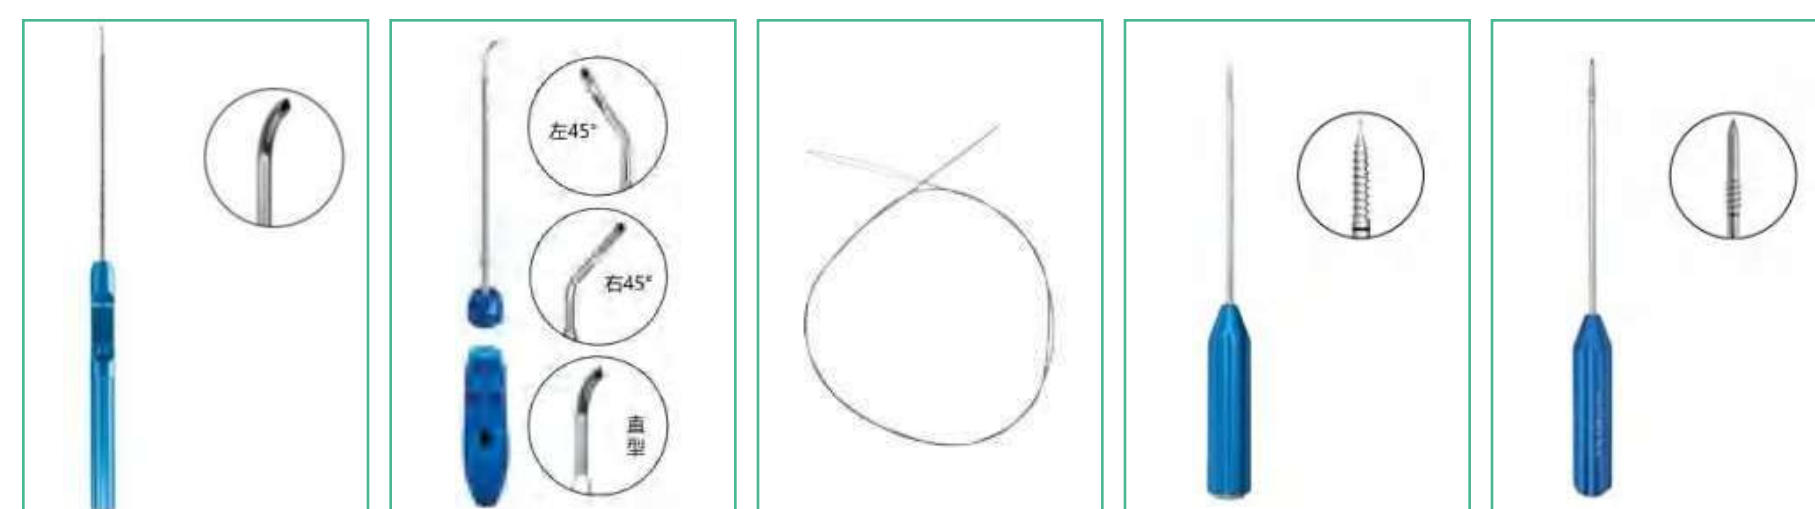


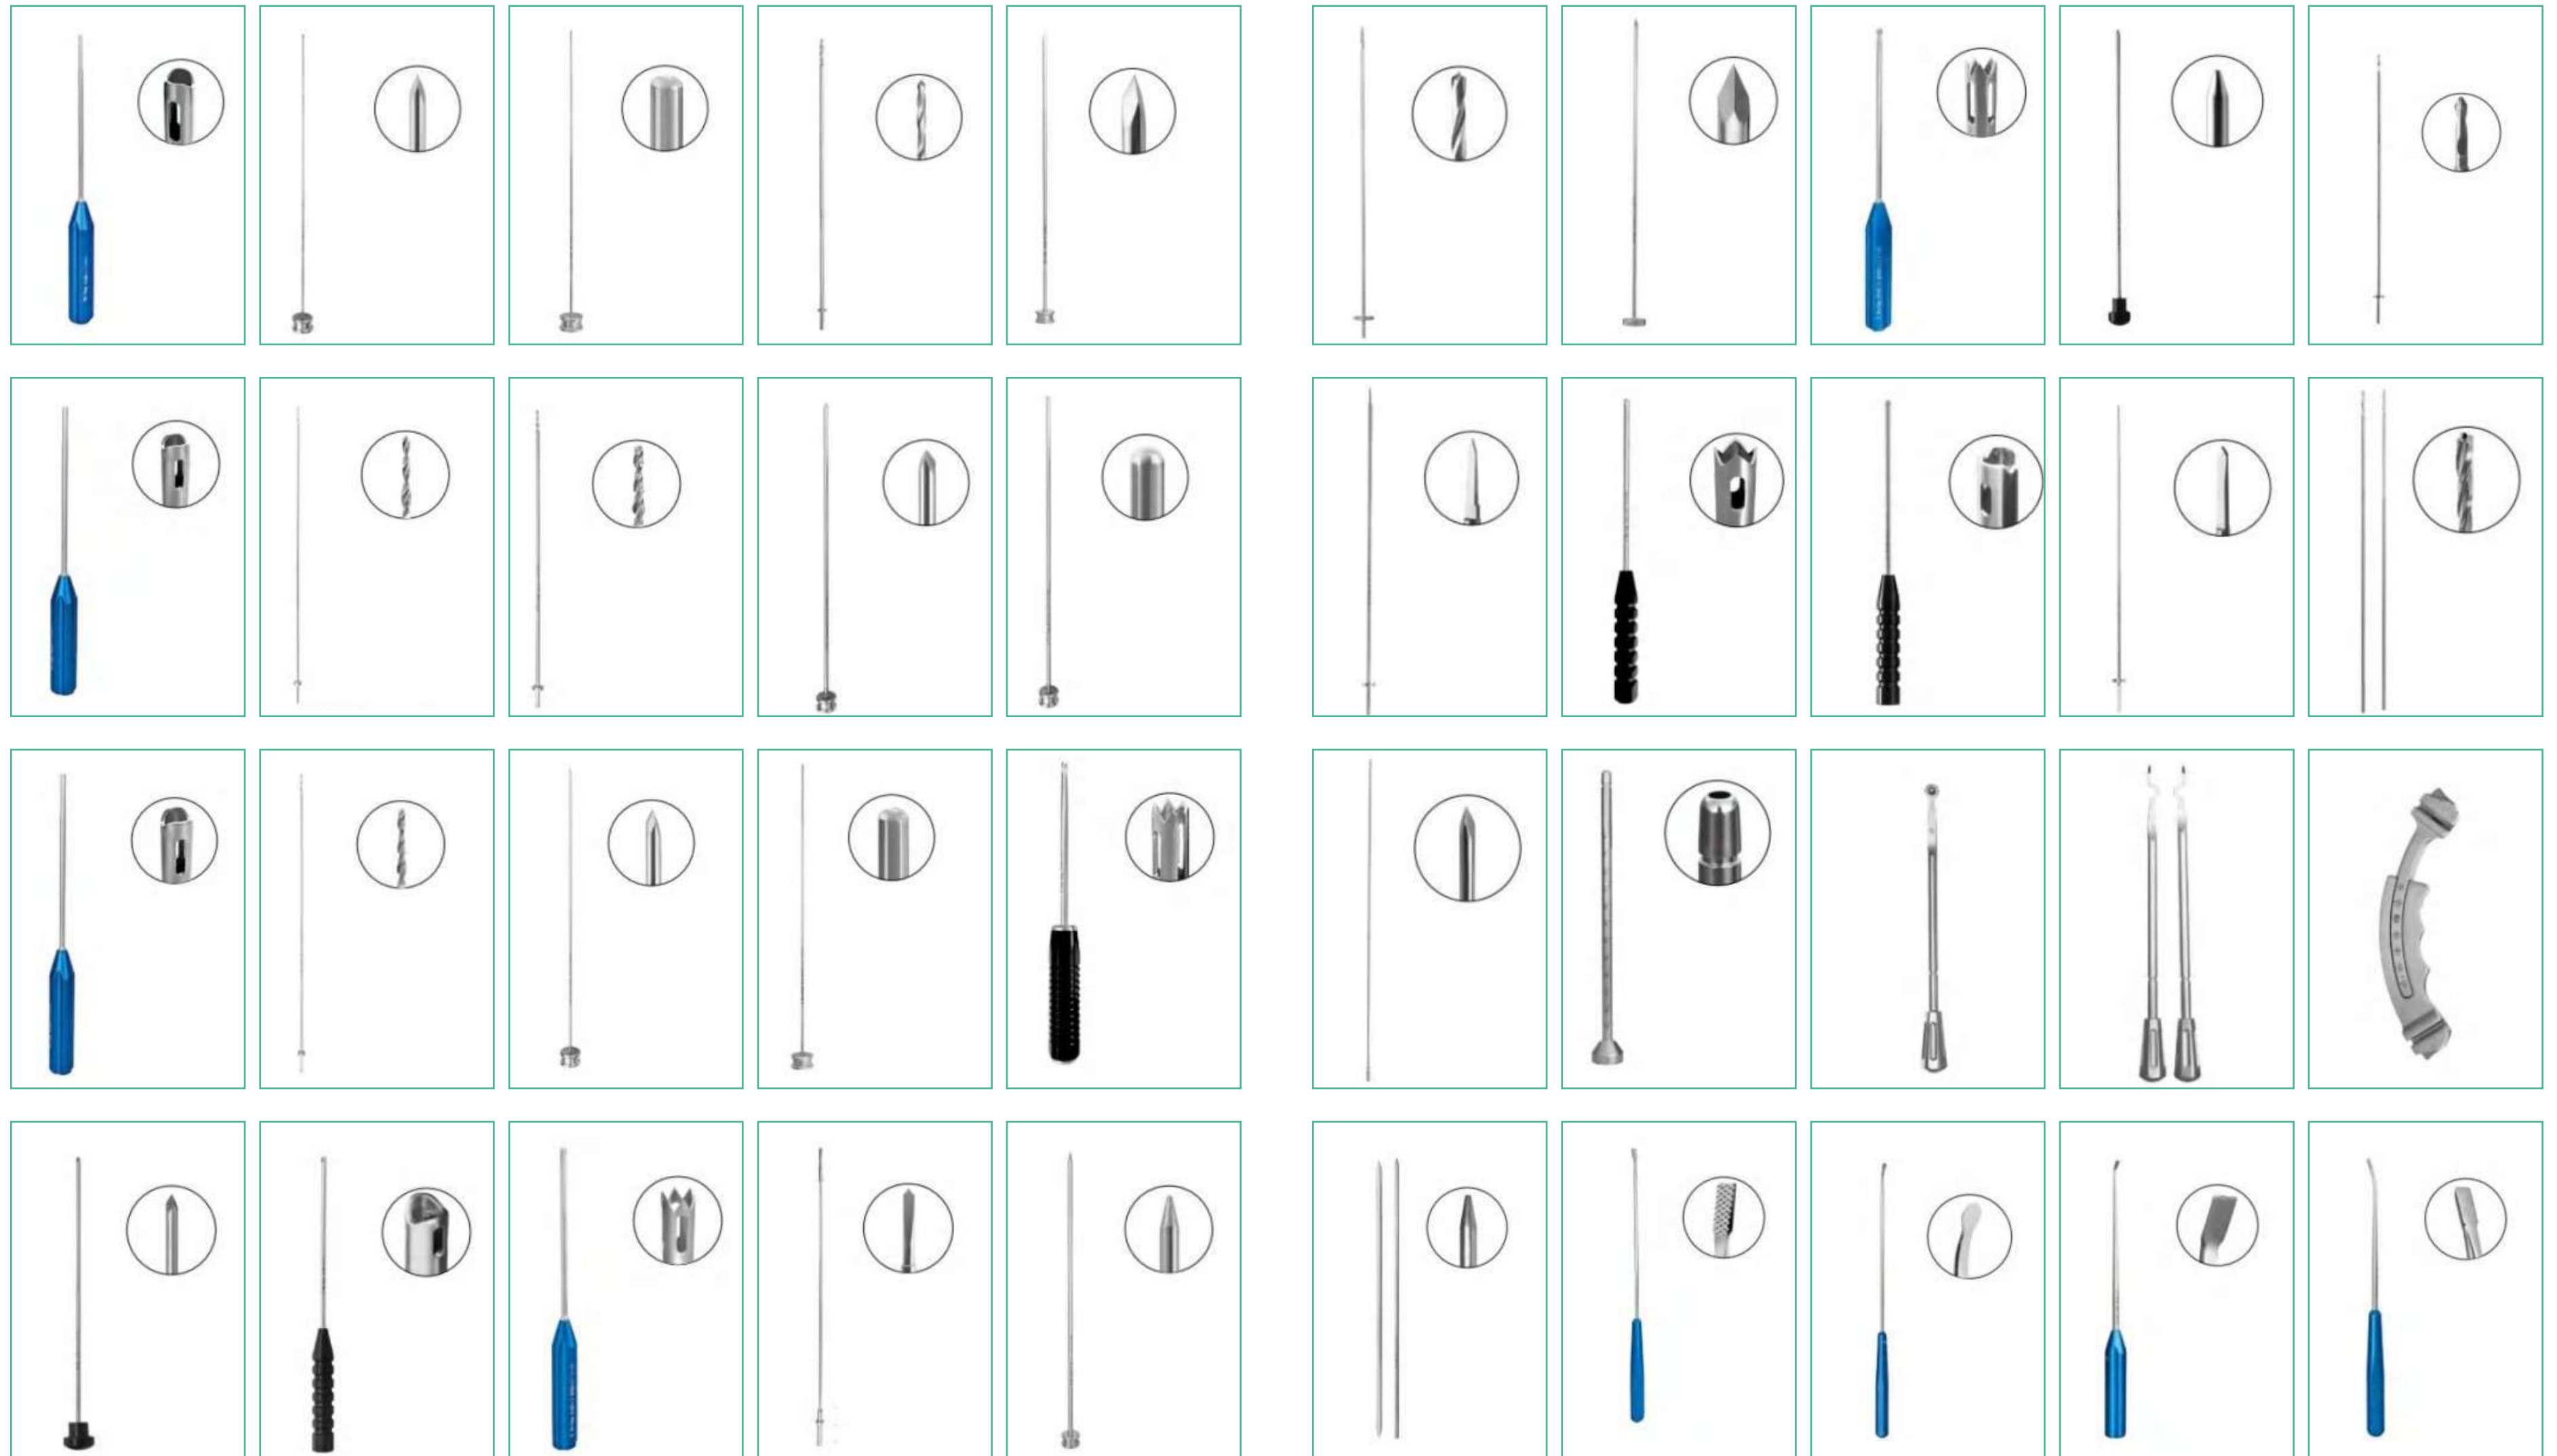


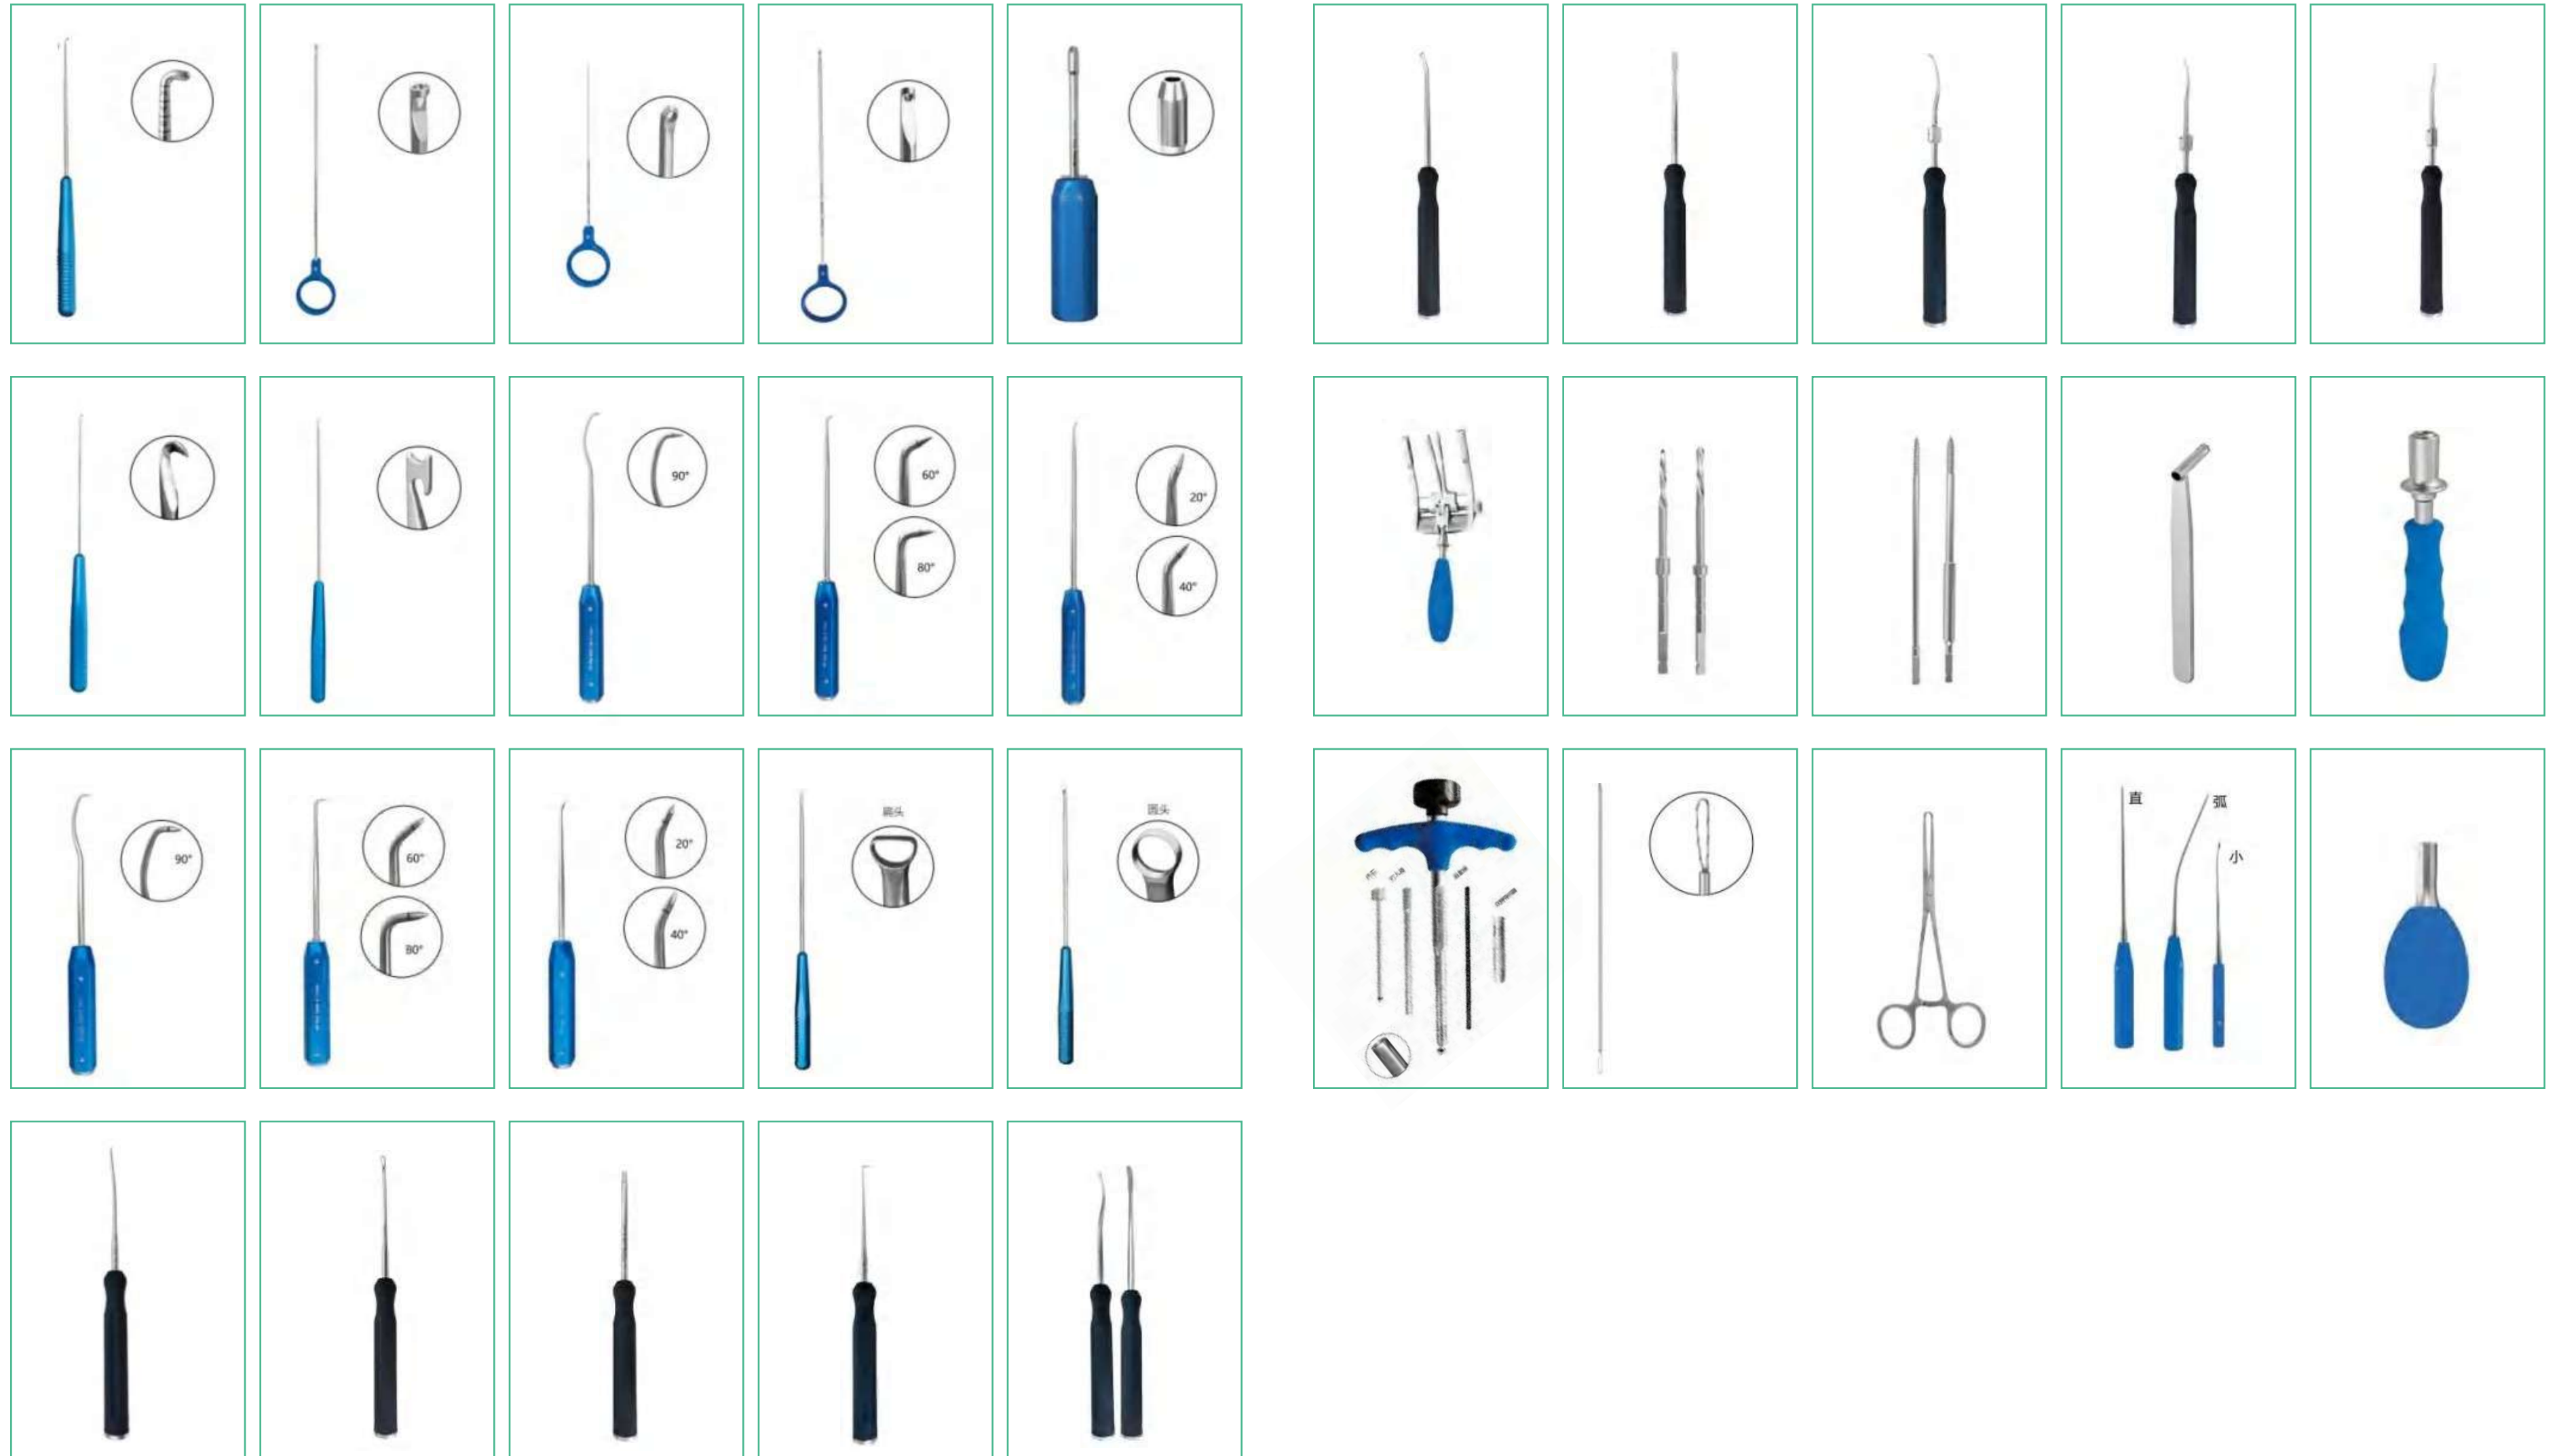



Invasive Spinal Surgery

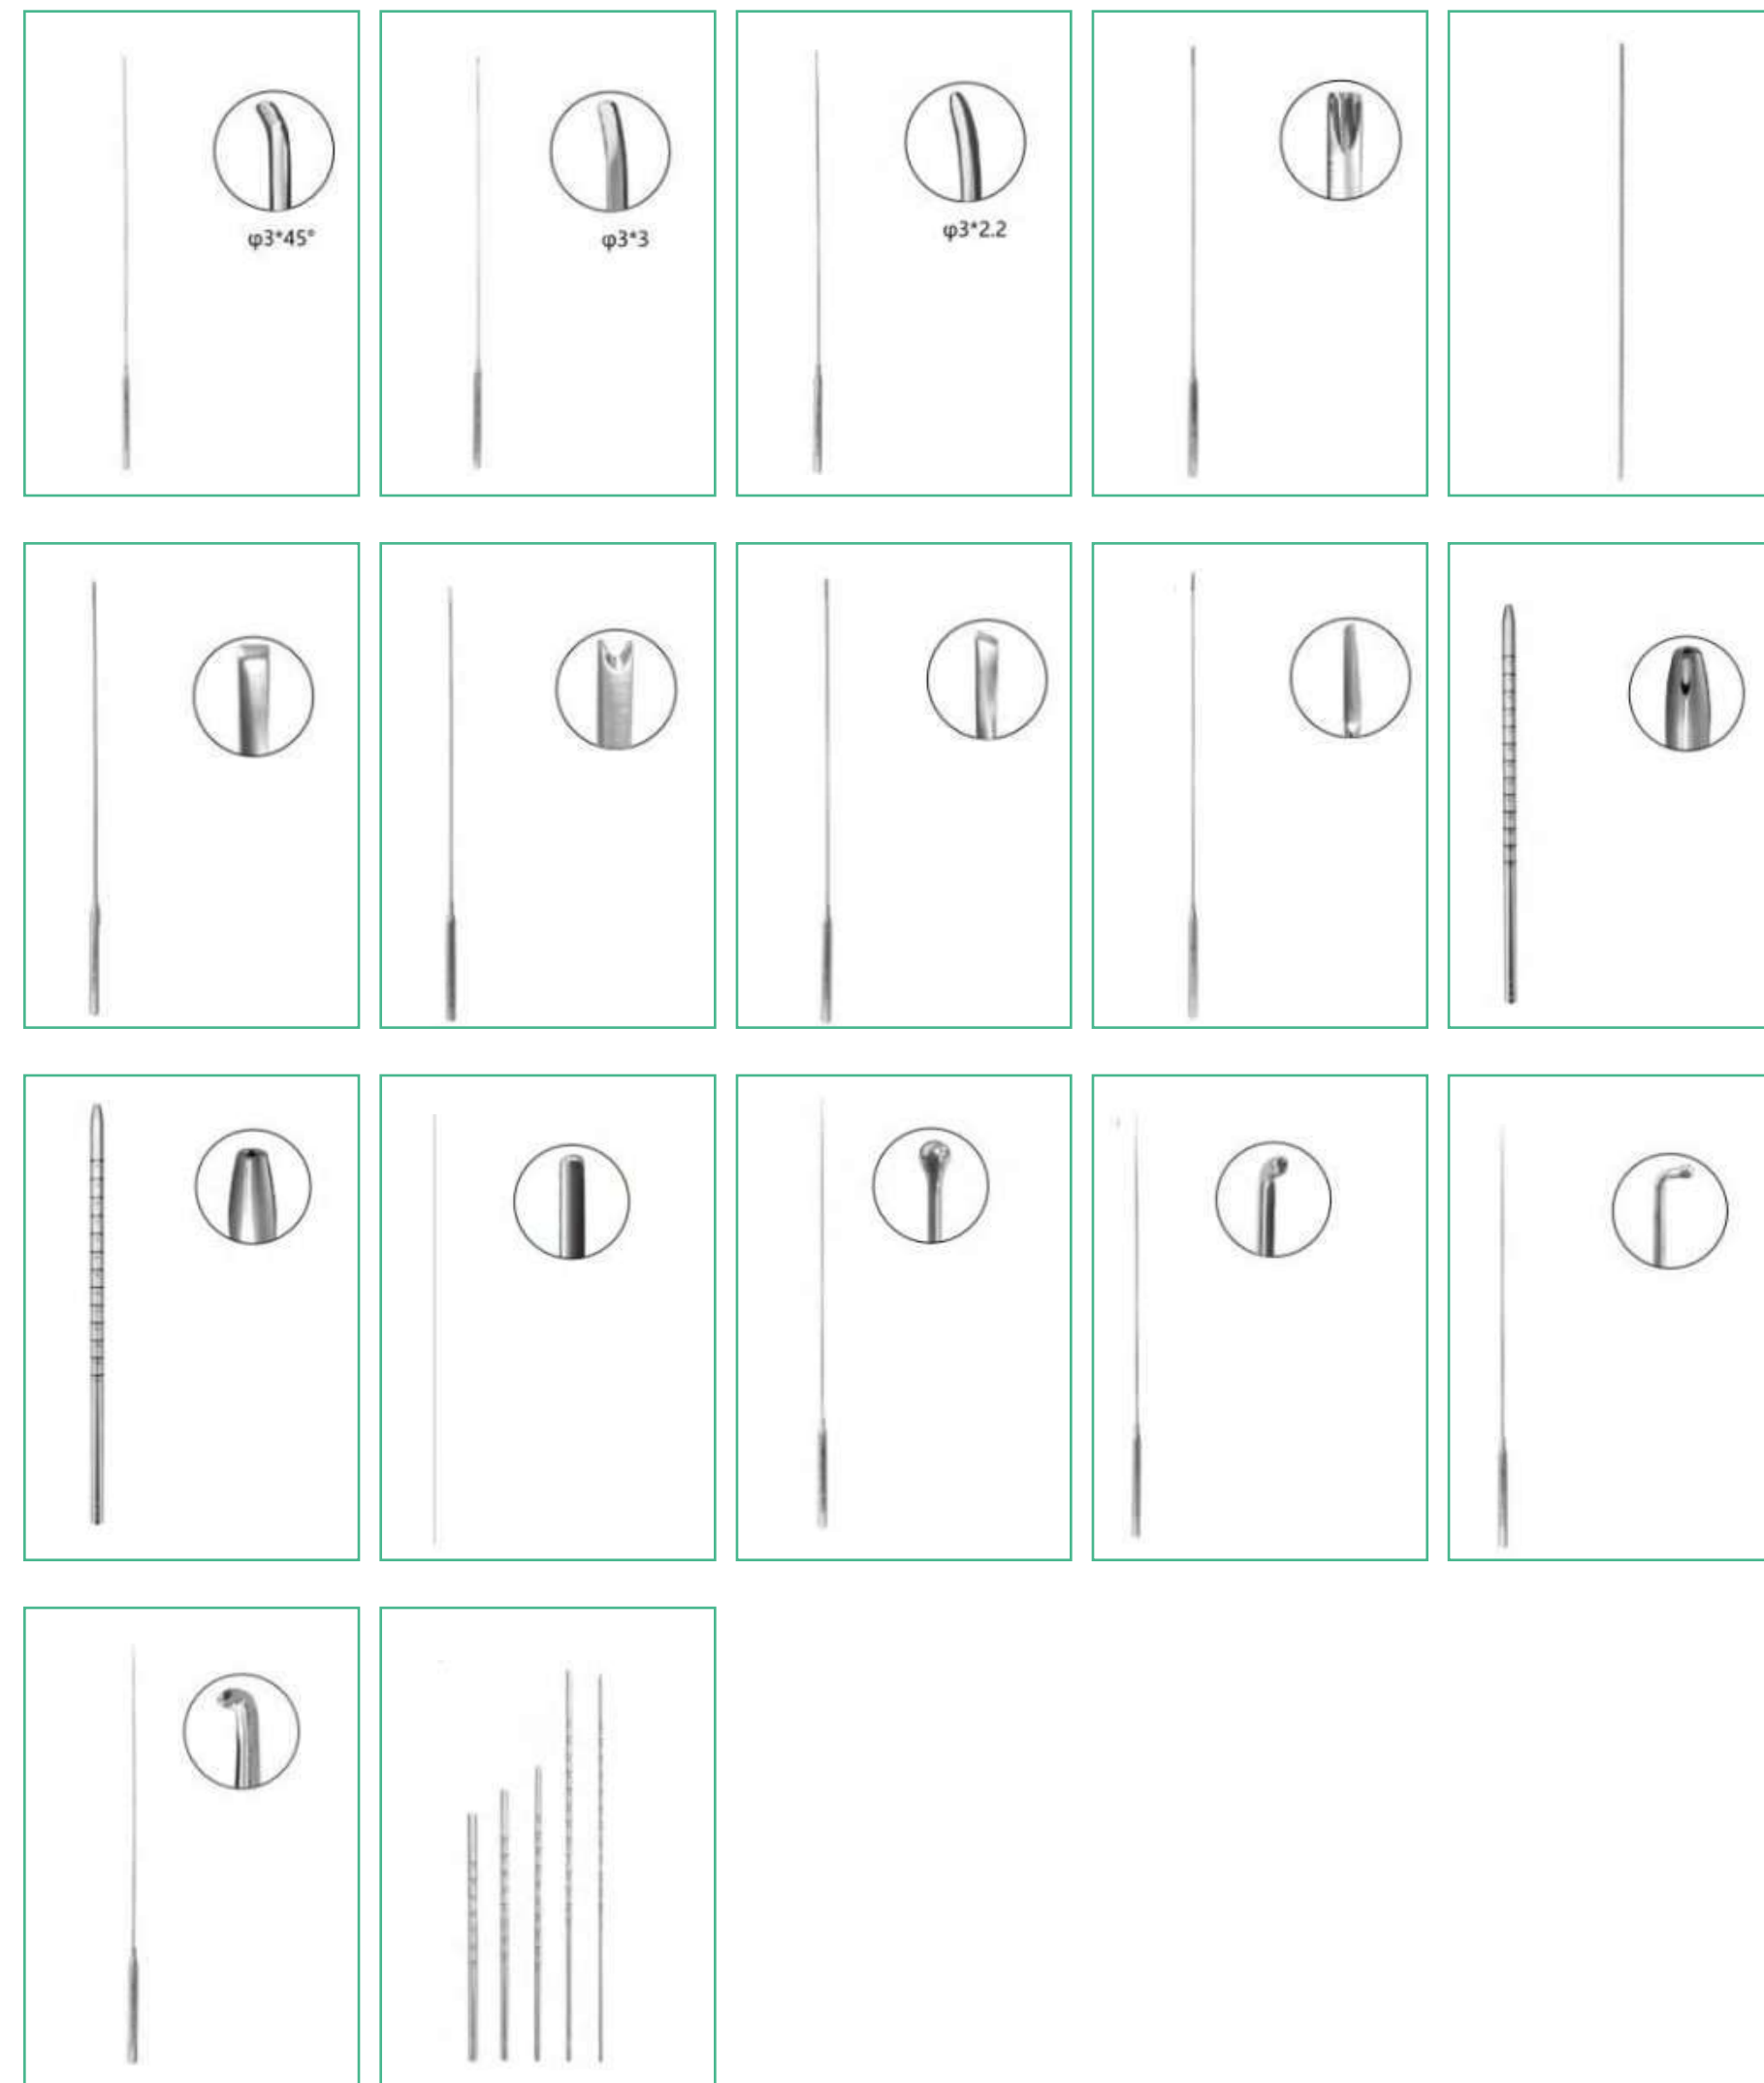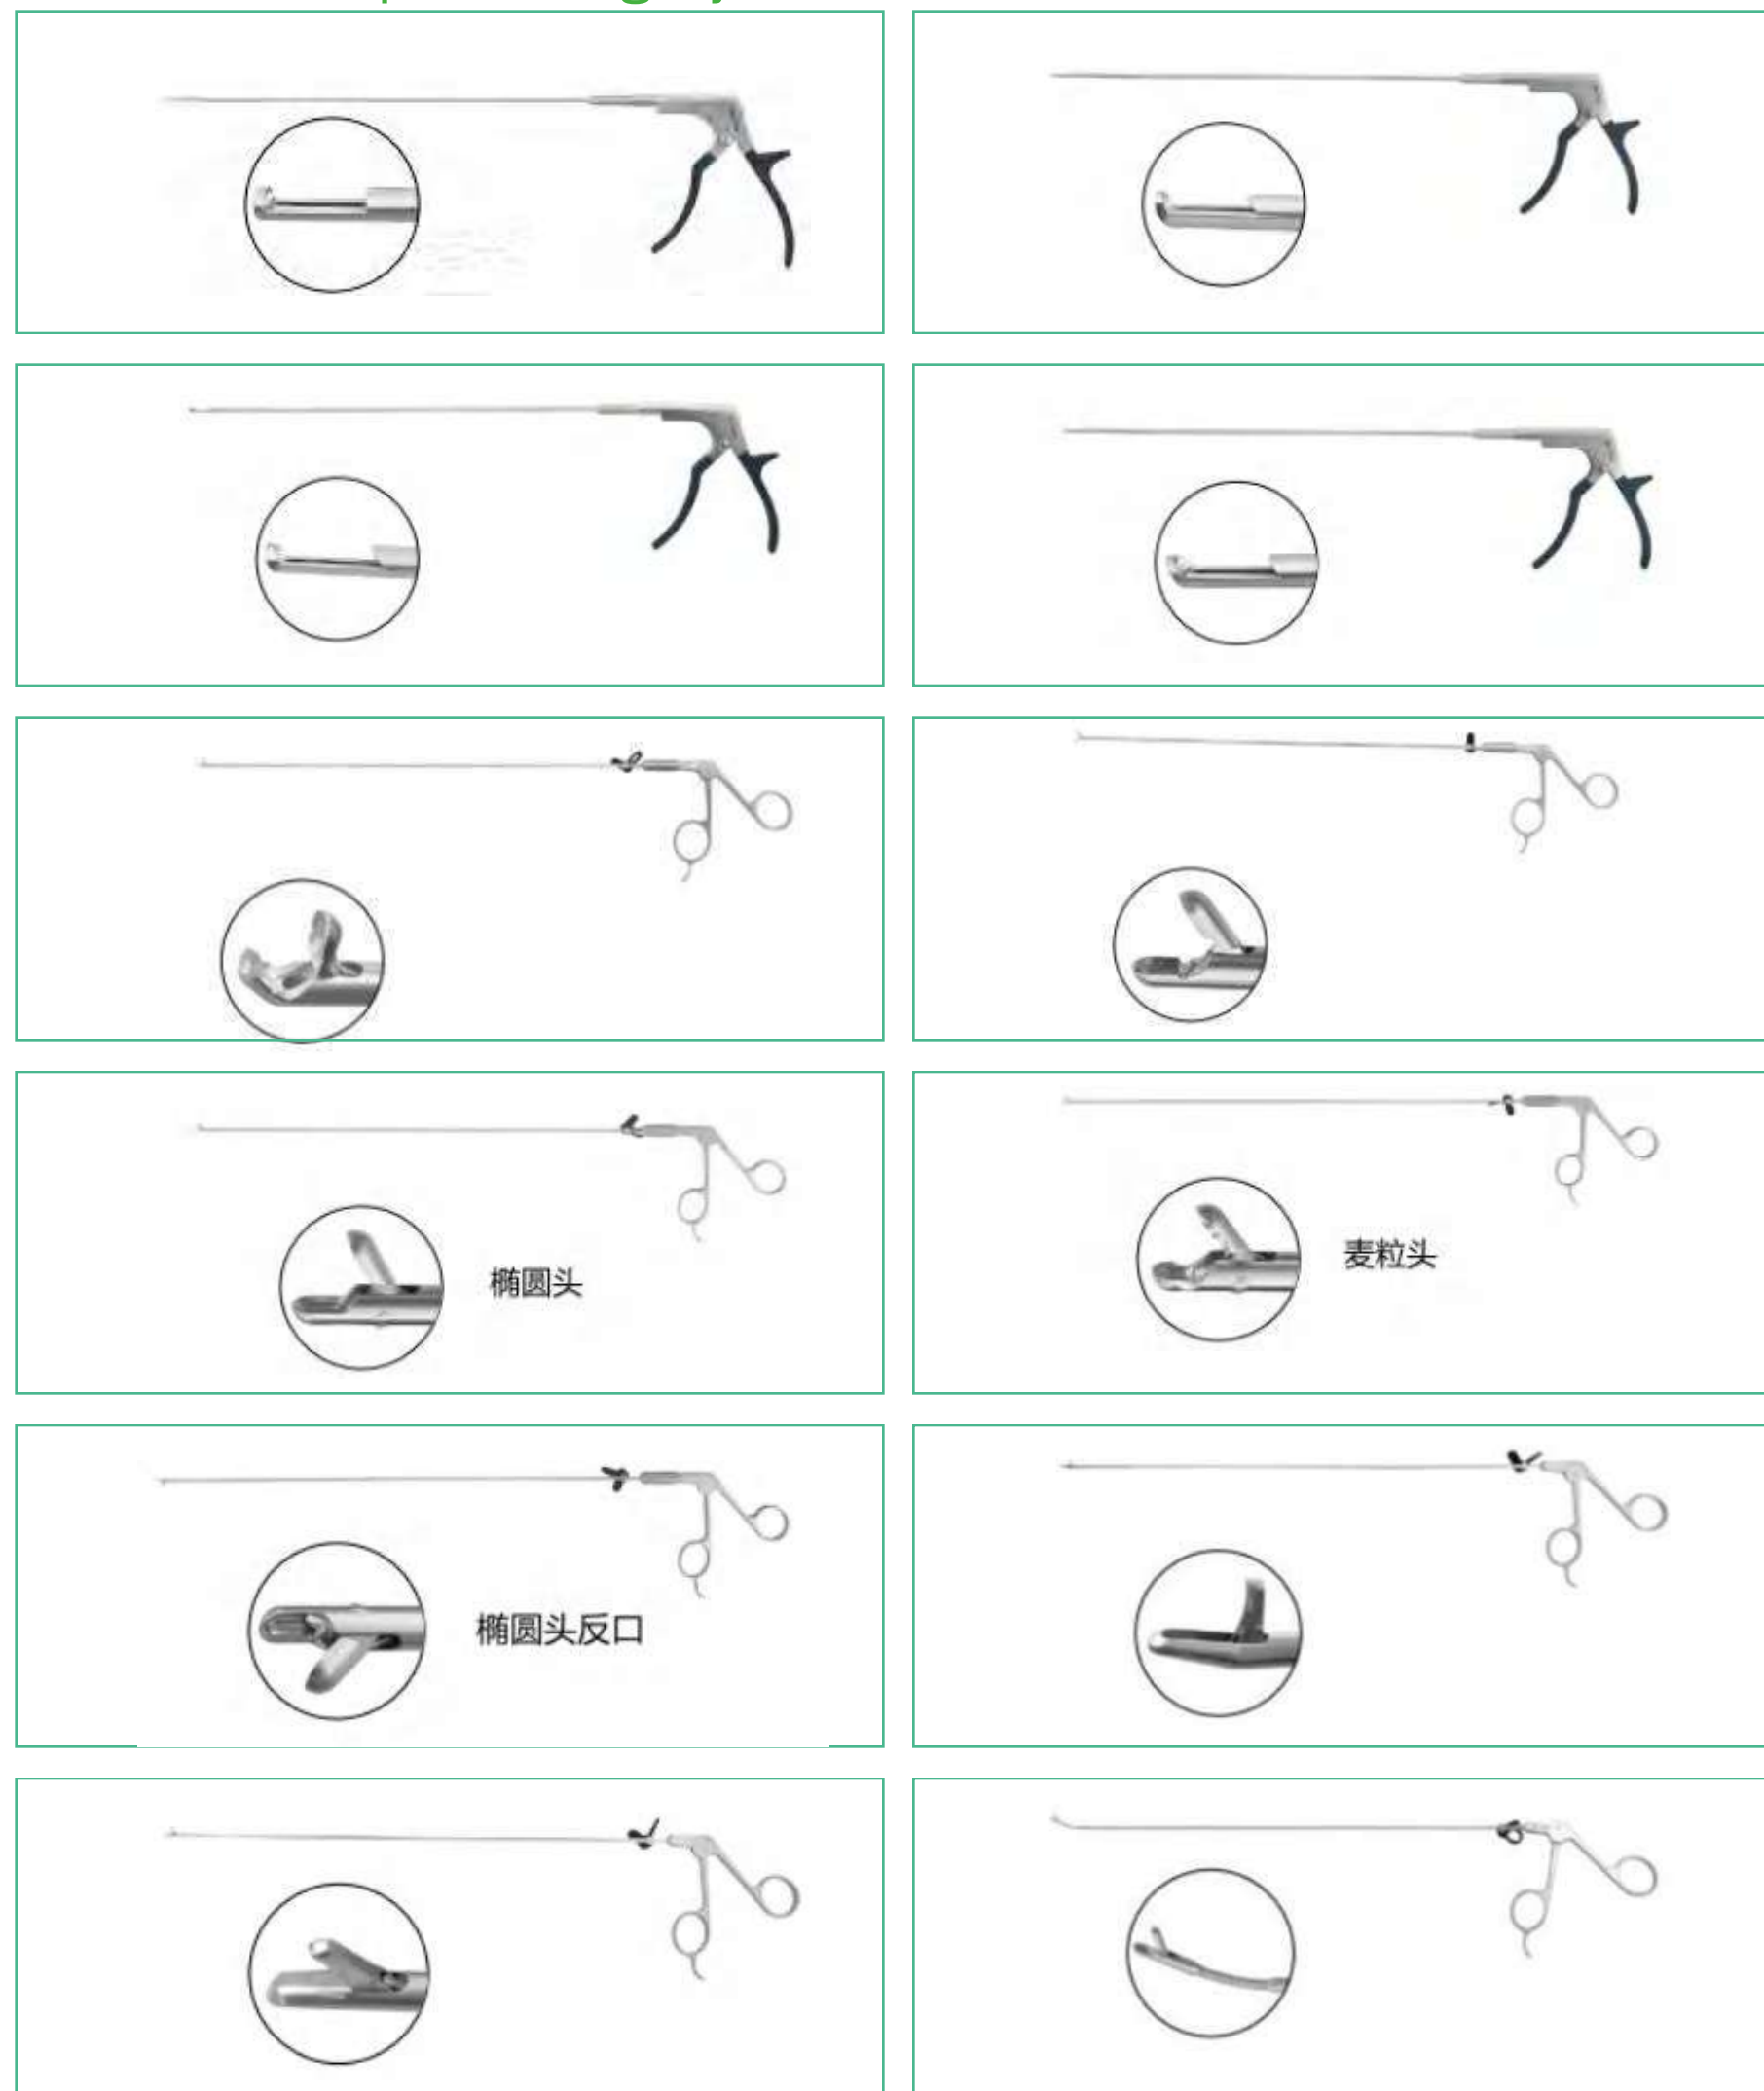



Forceps

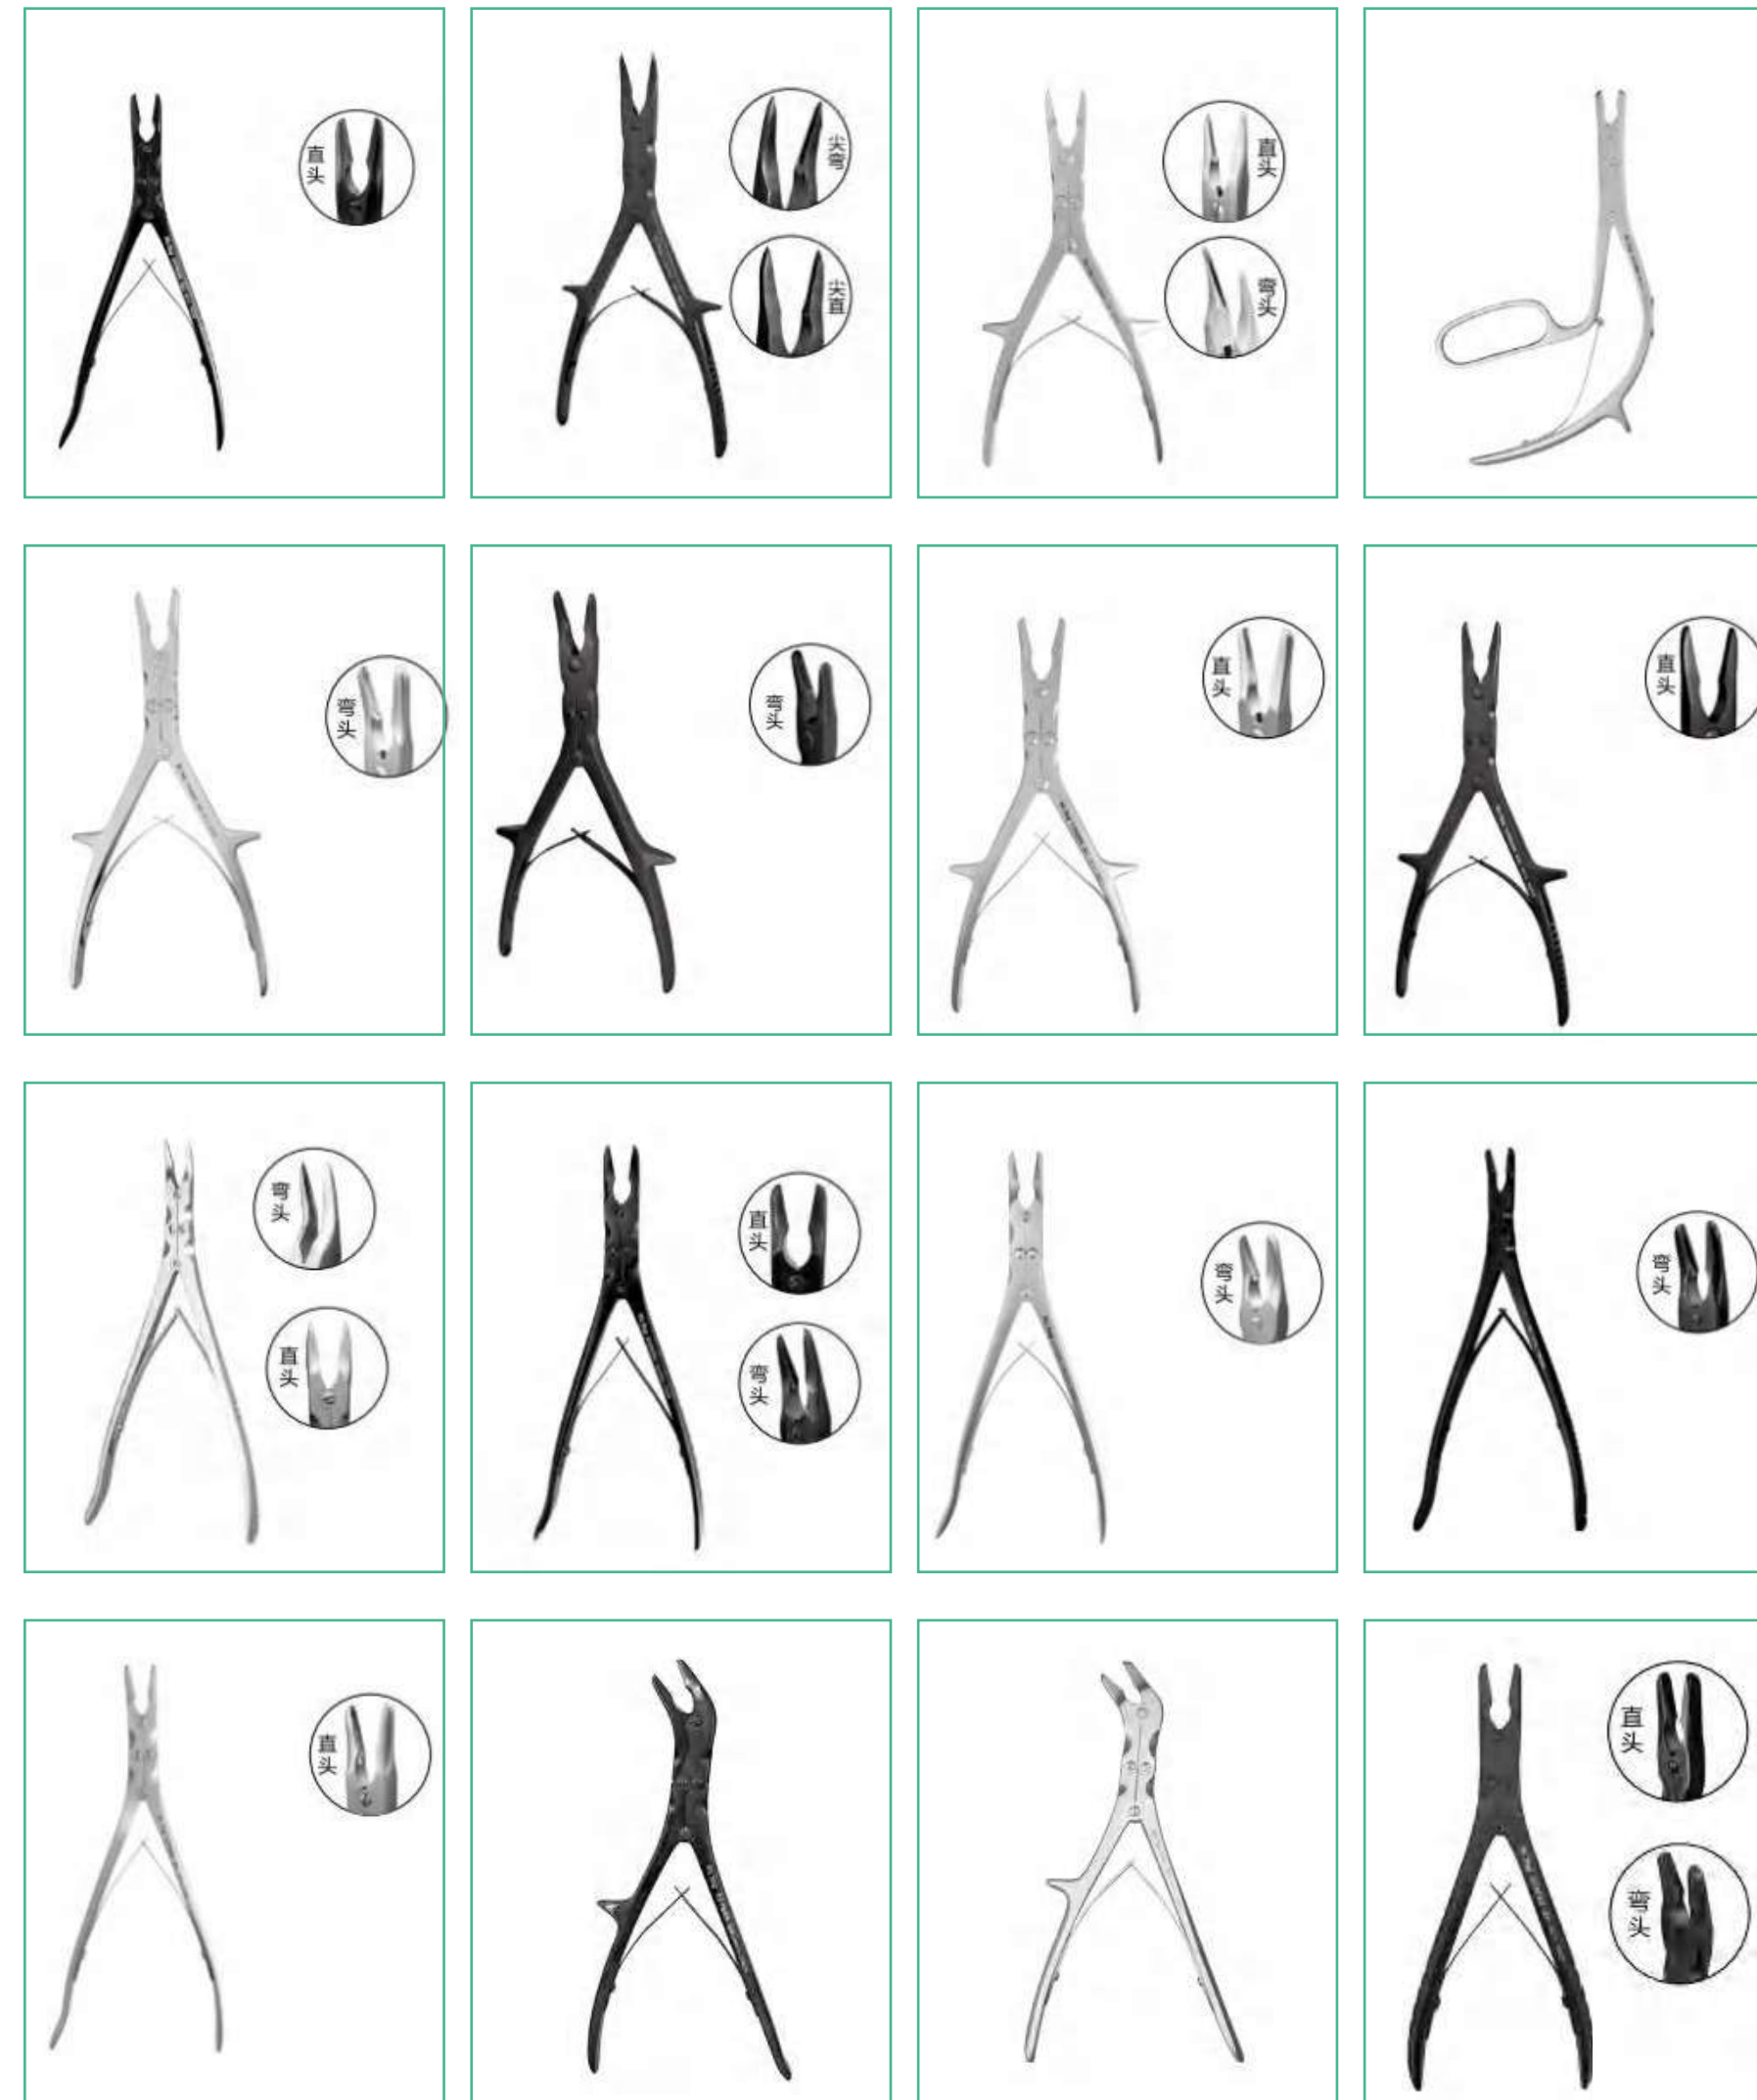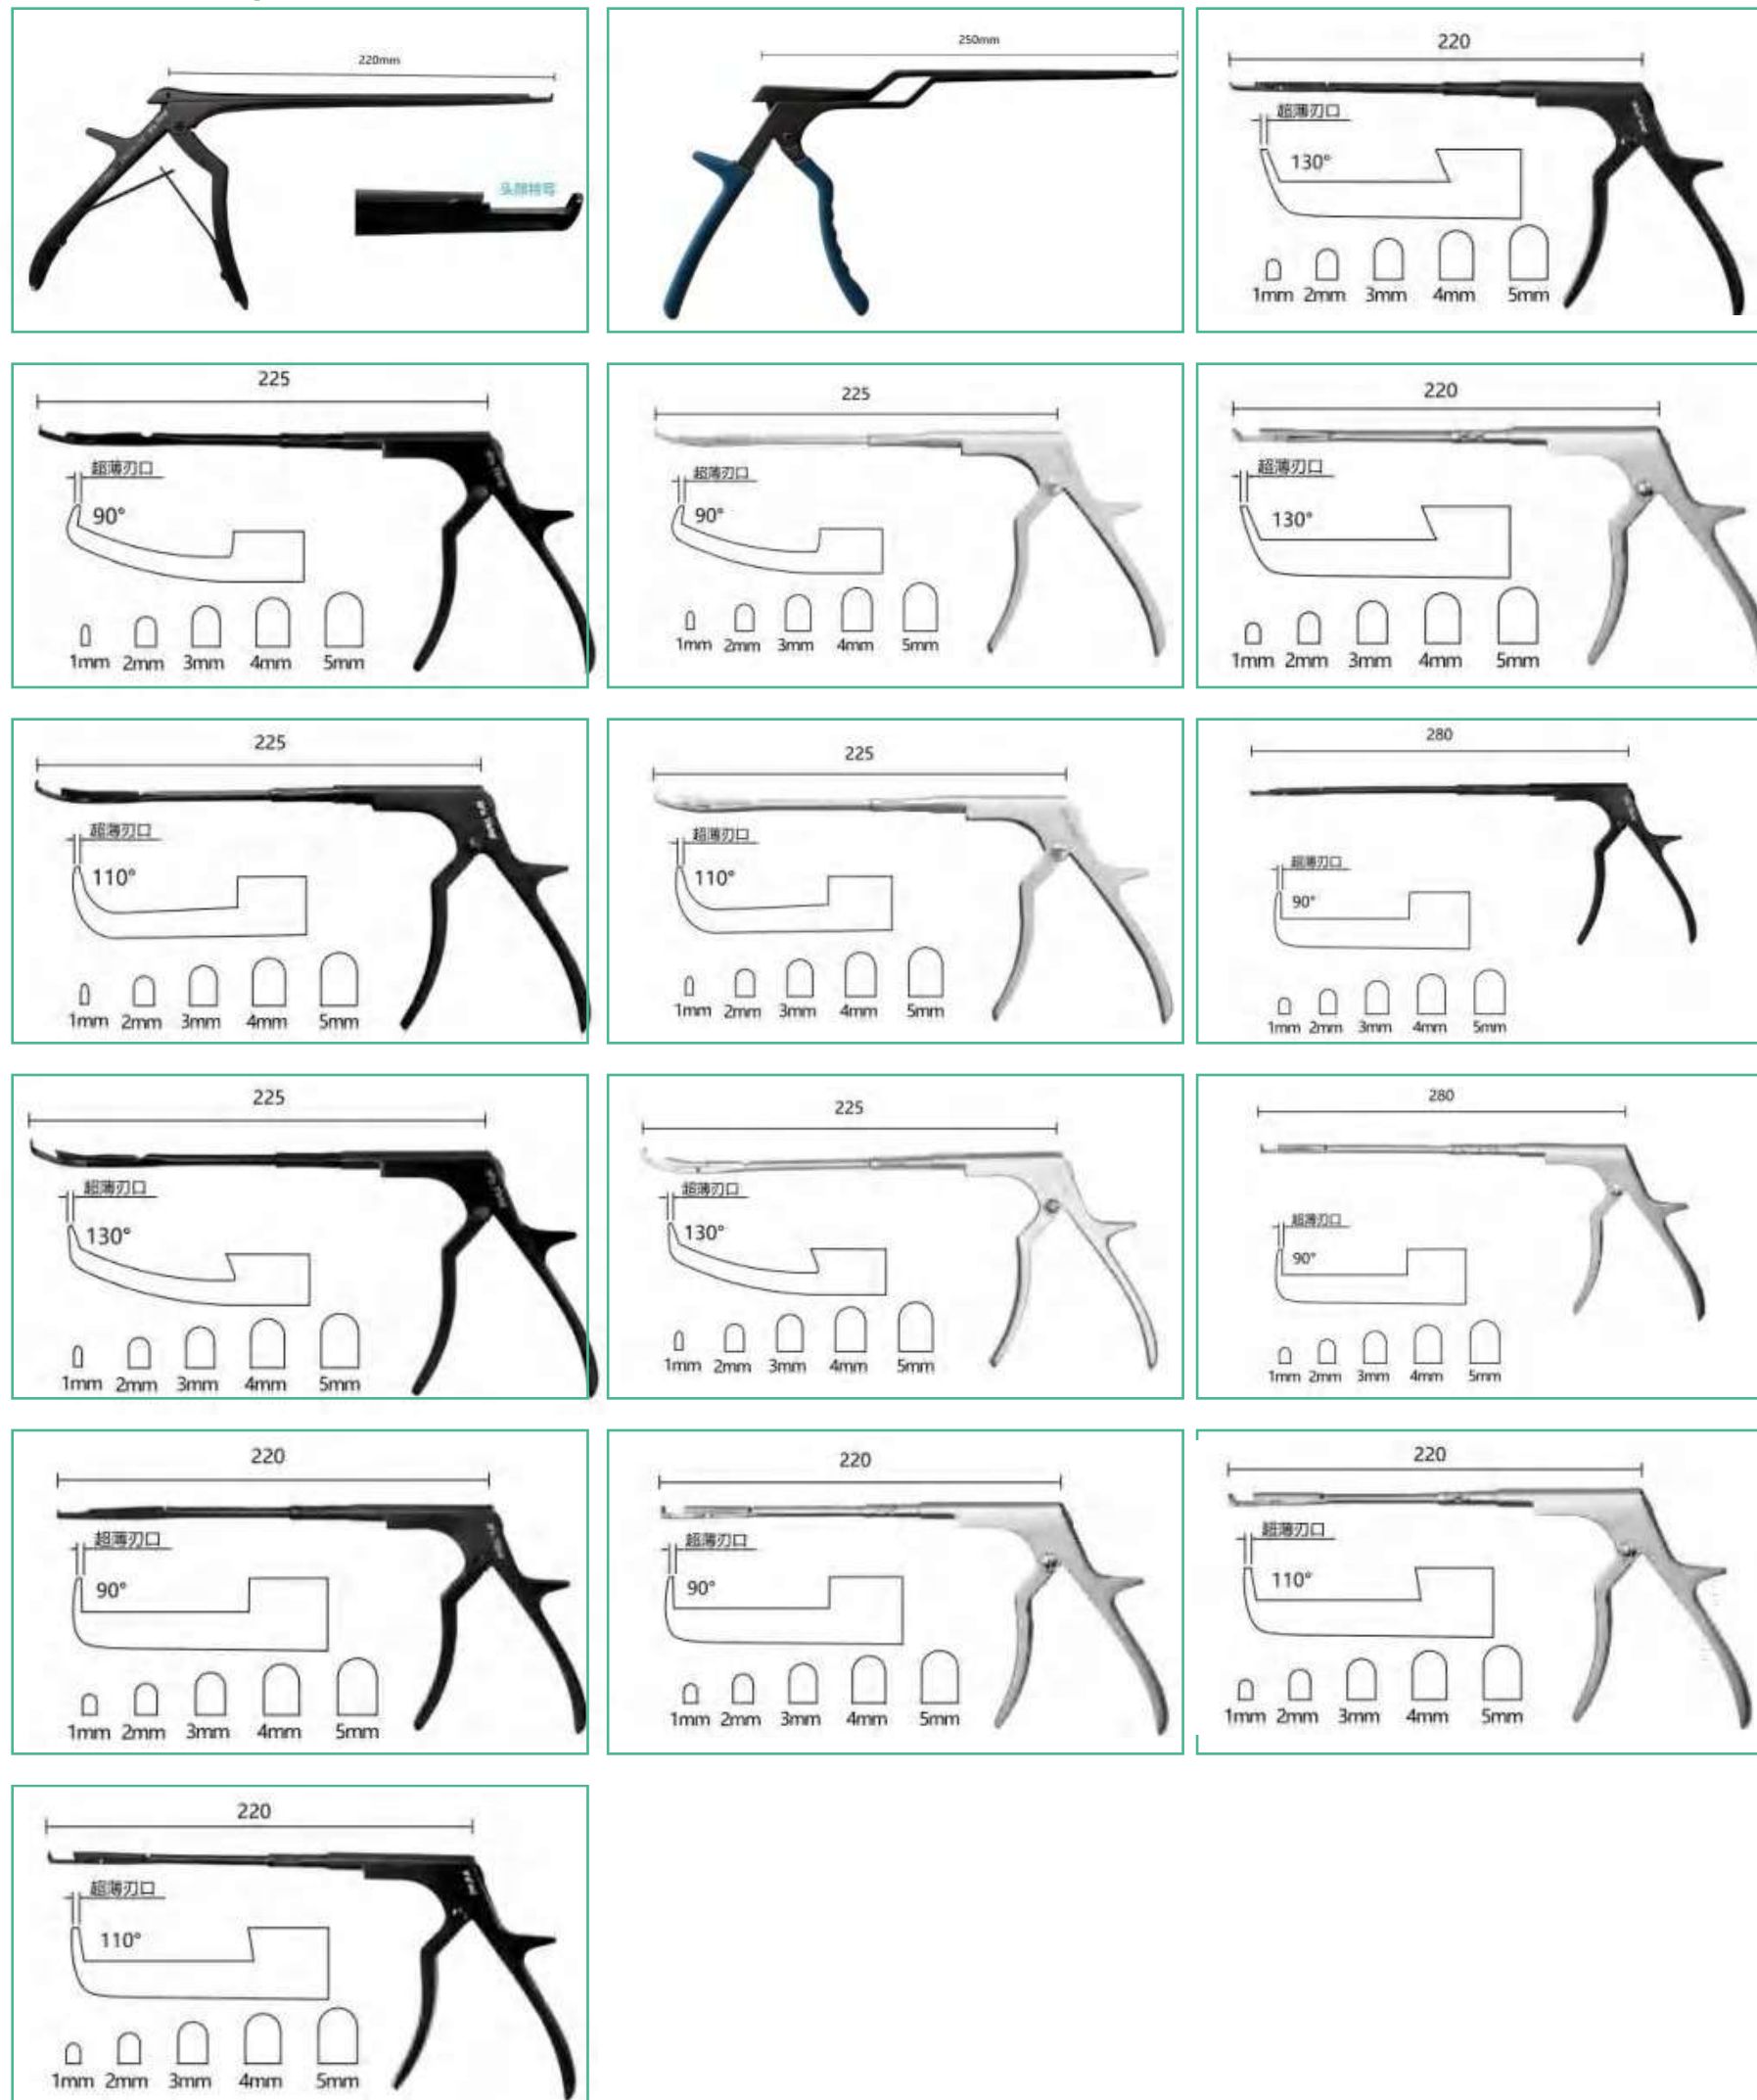


Bone knife

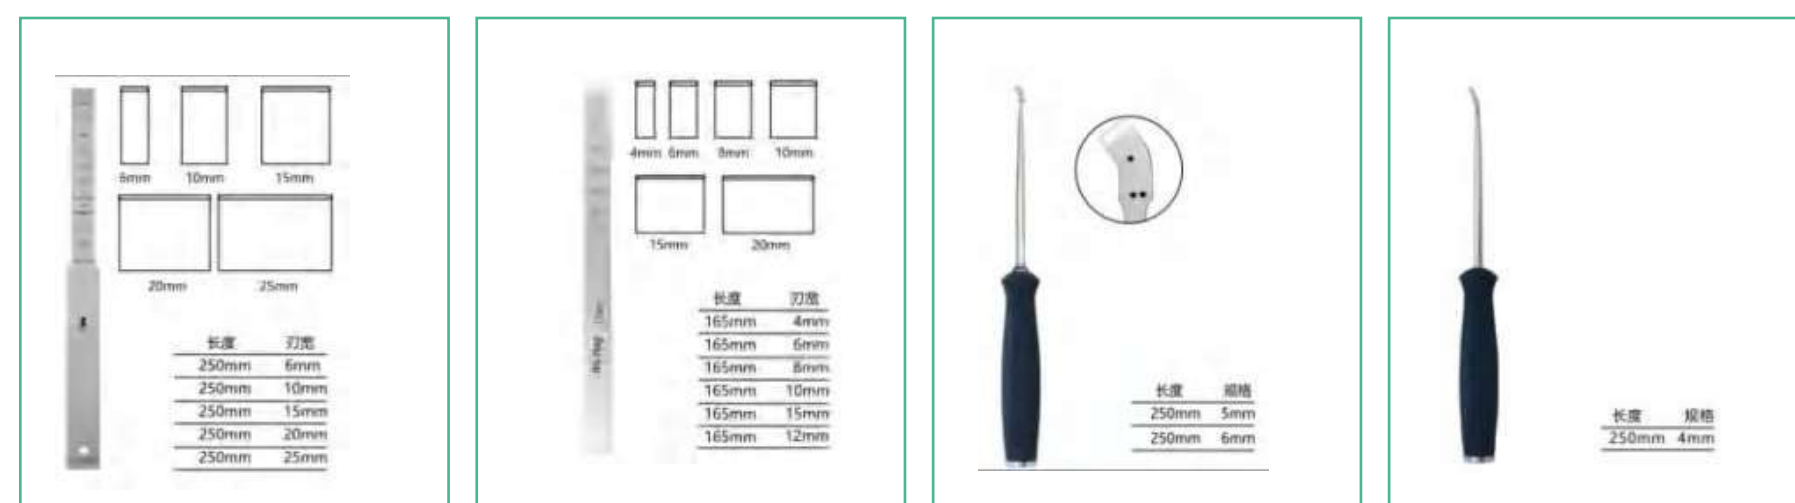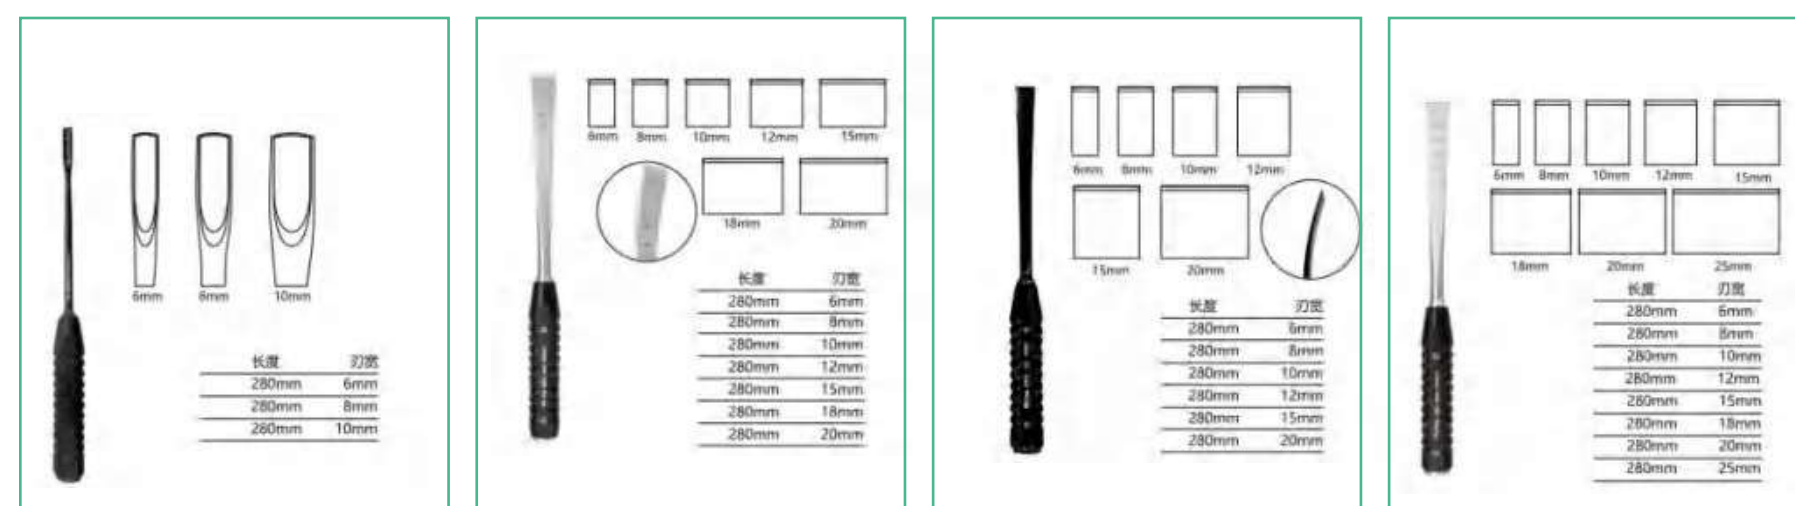


Bone scraping spoon

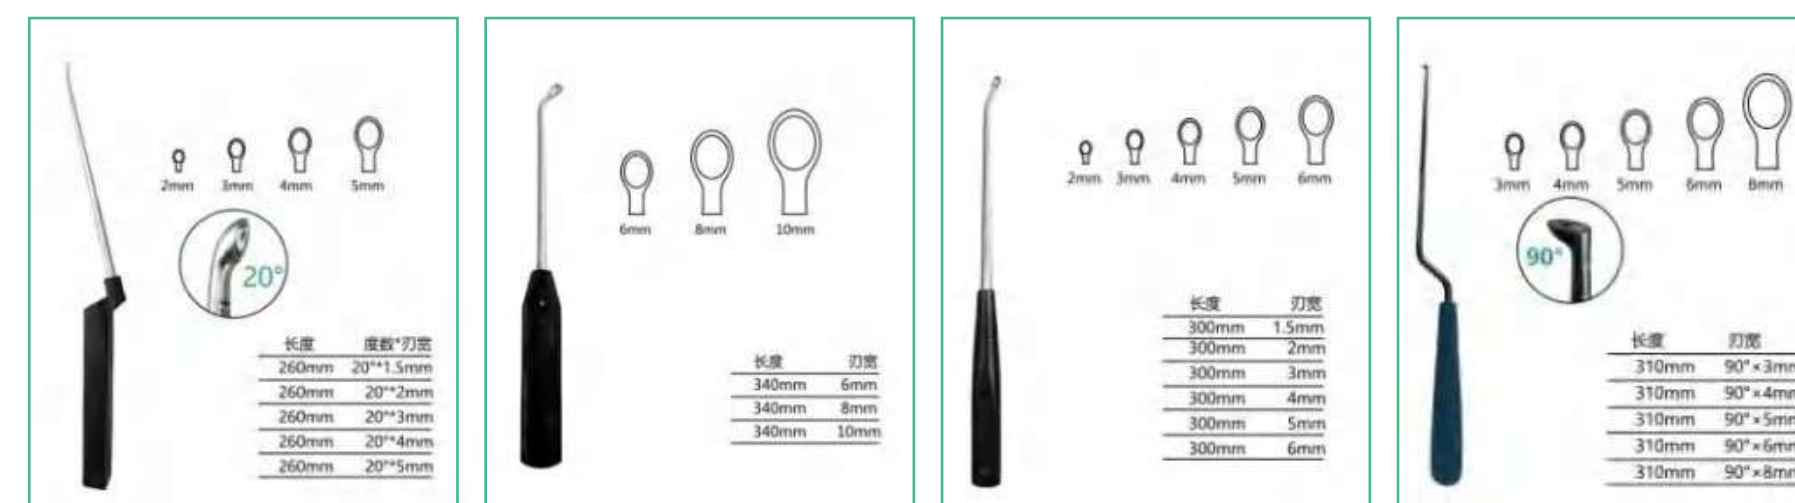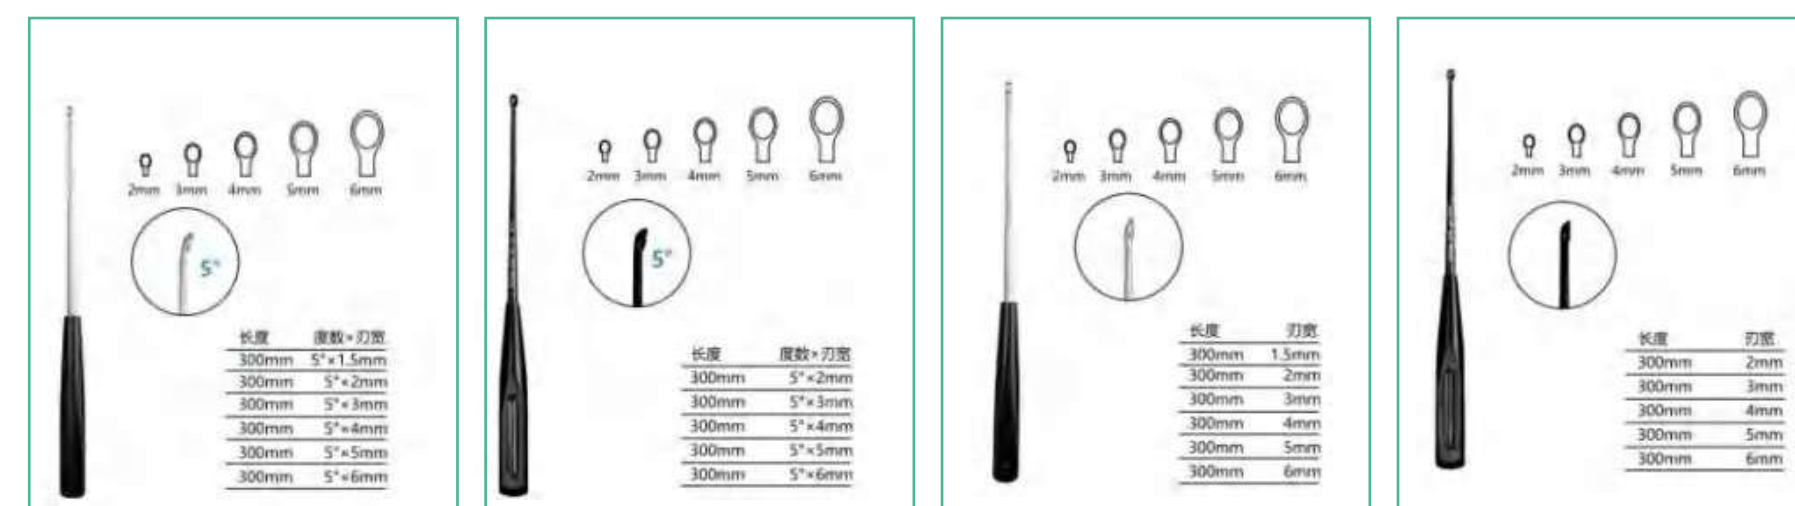


■ Forceps for reduction

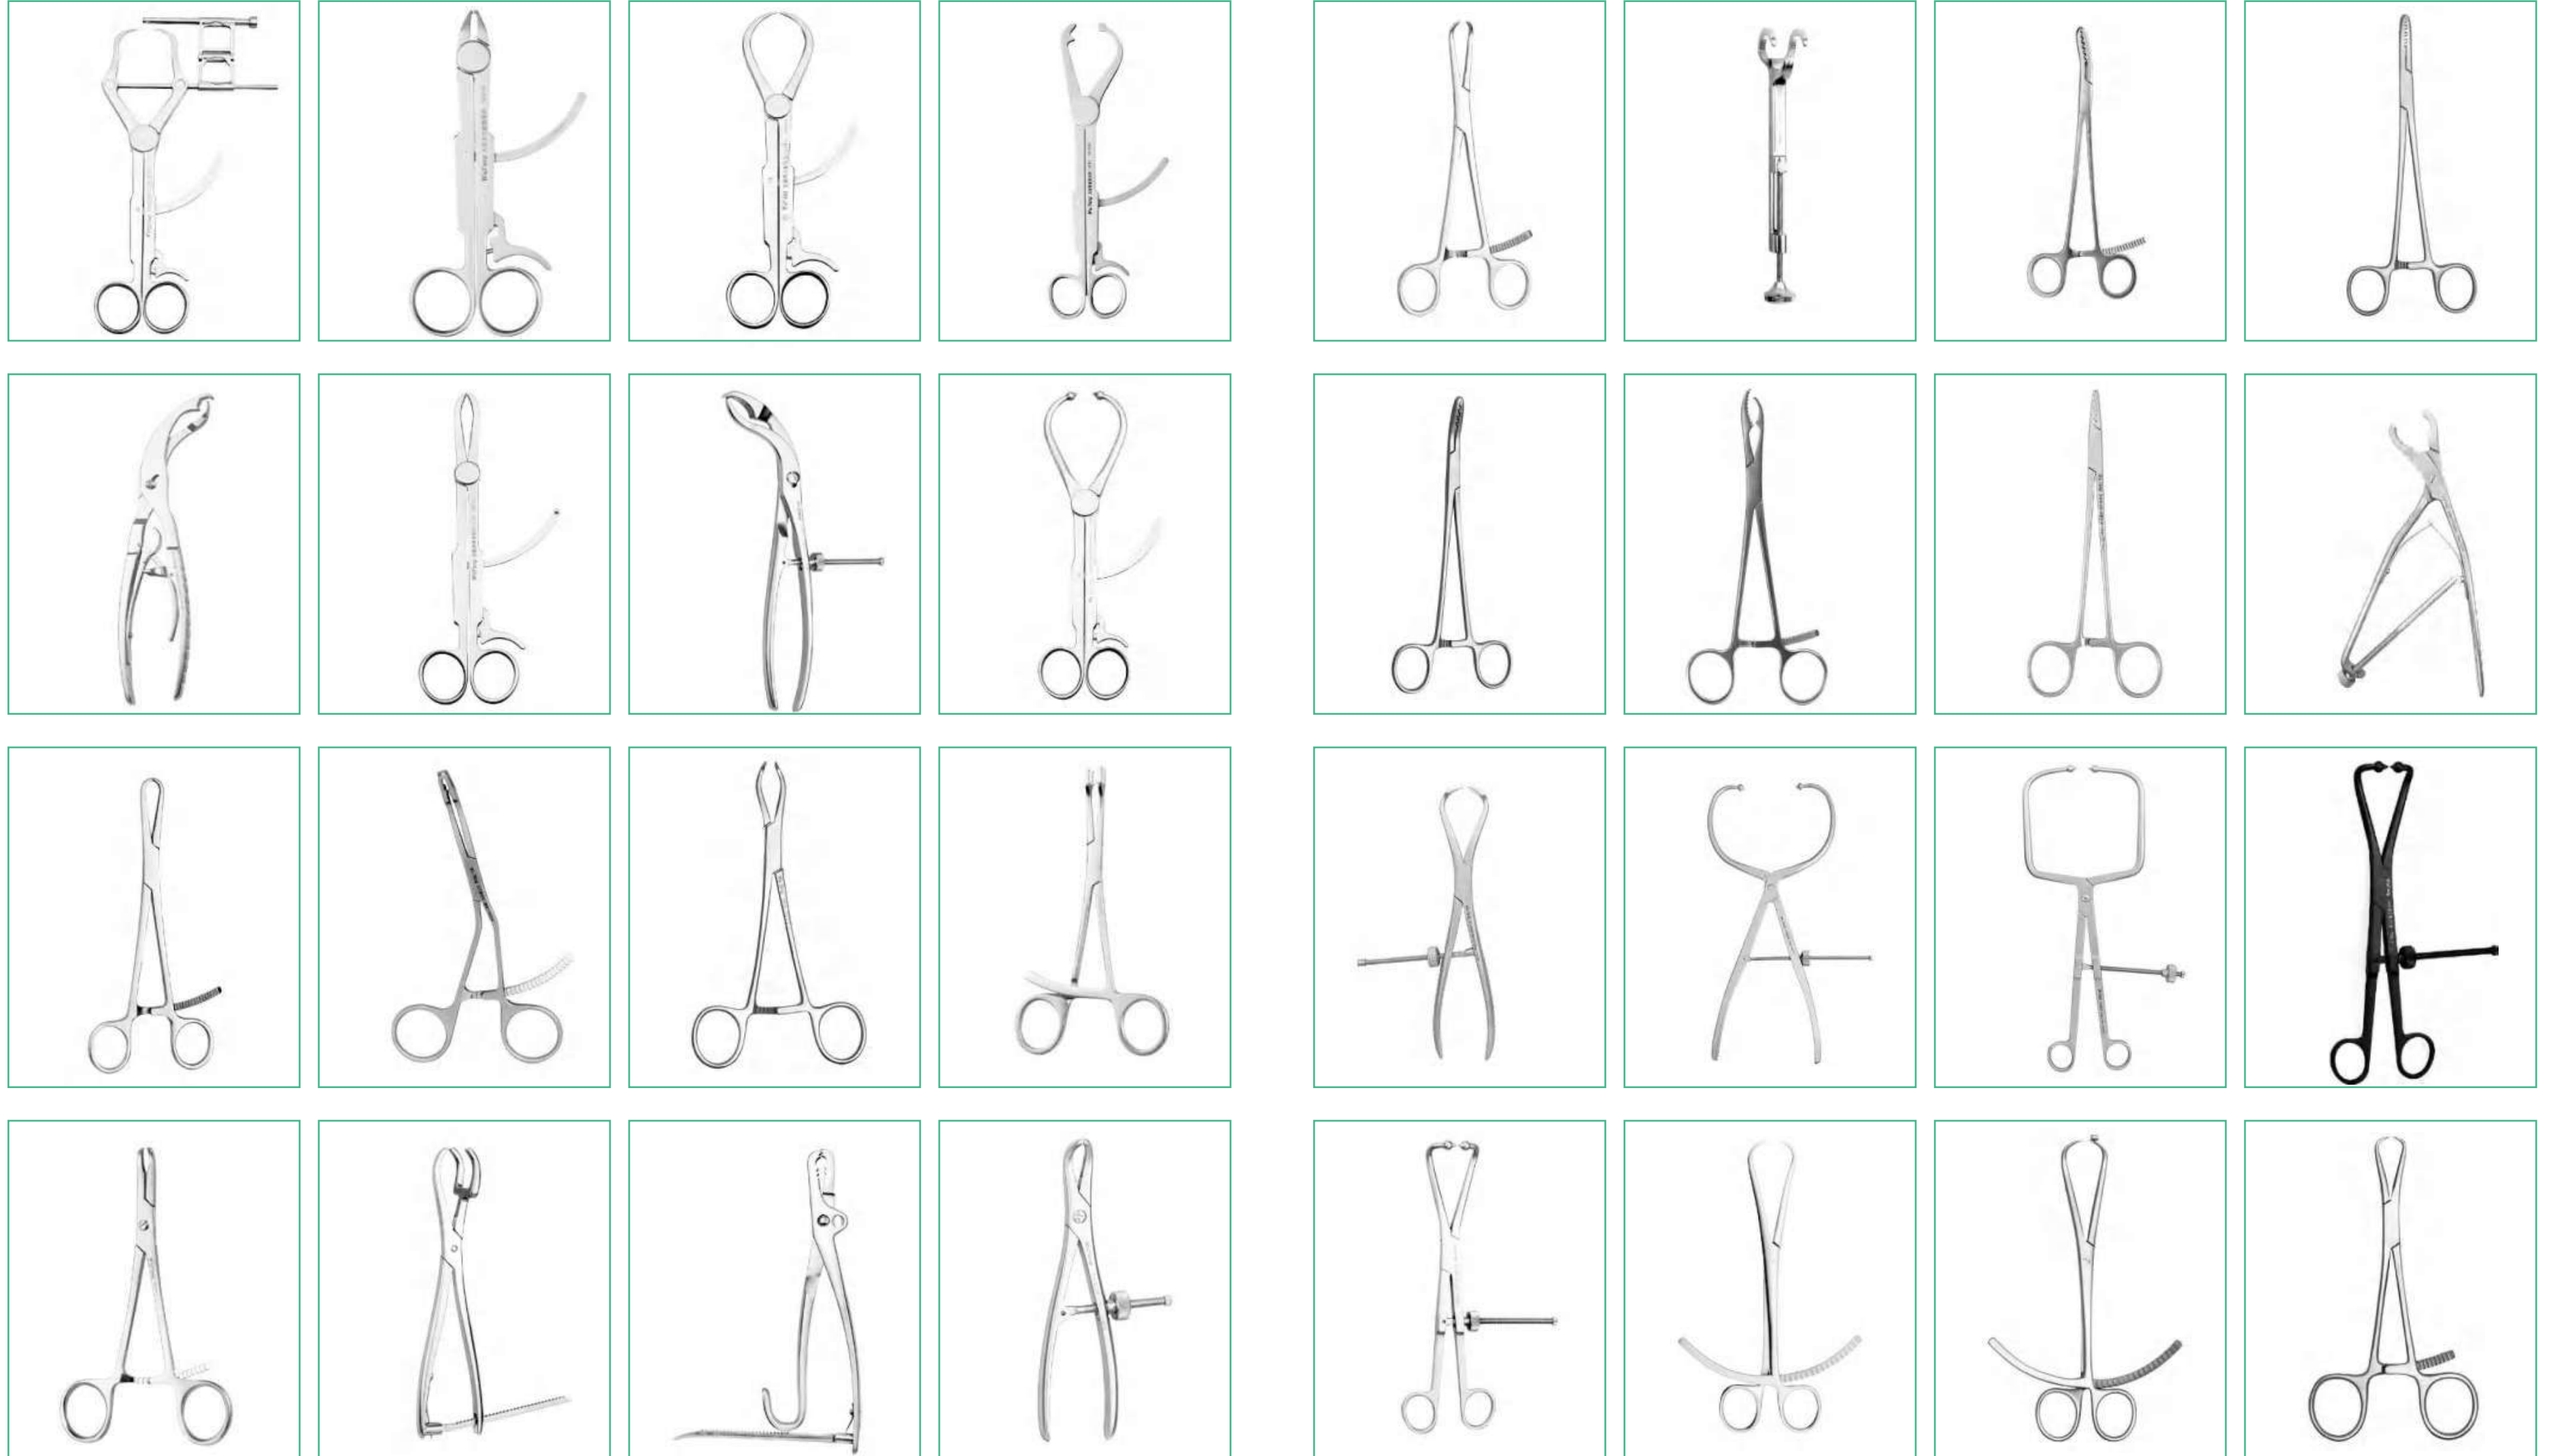






■ Scissors

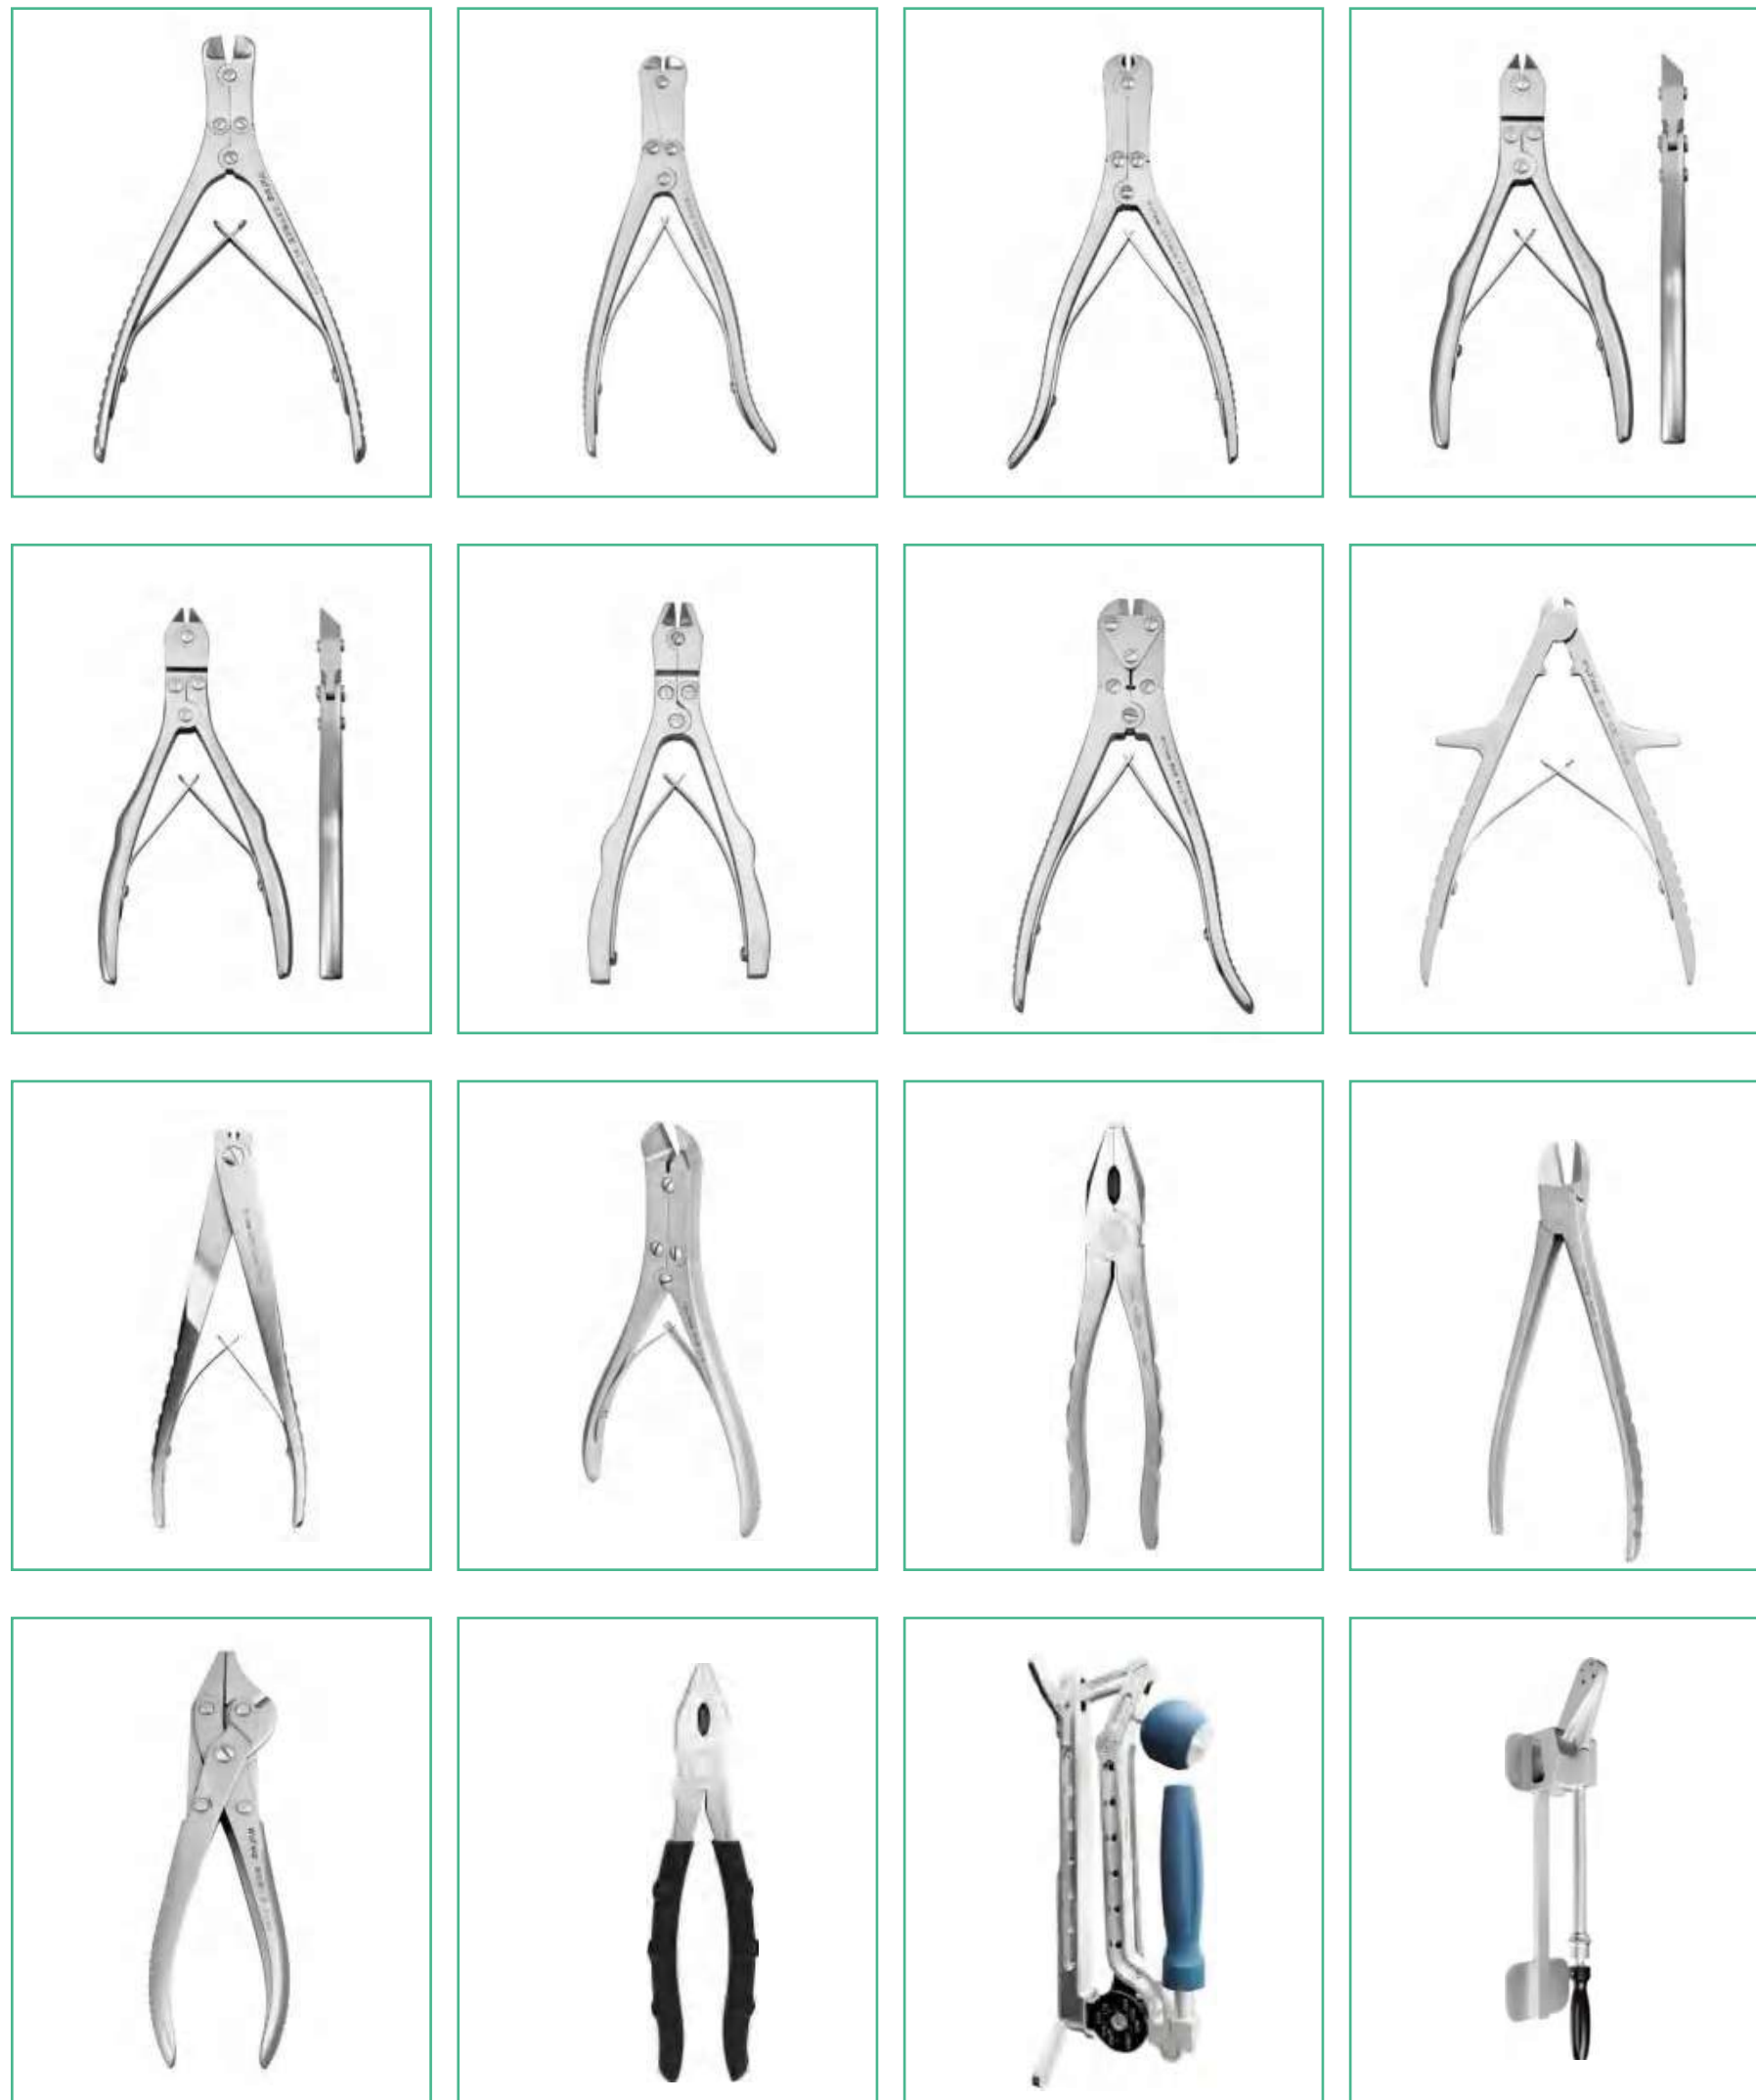



■ Joint distraction pliers

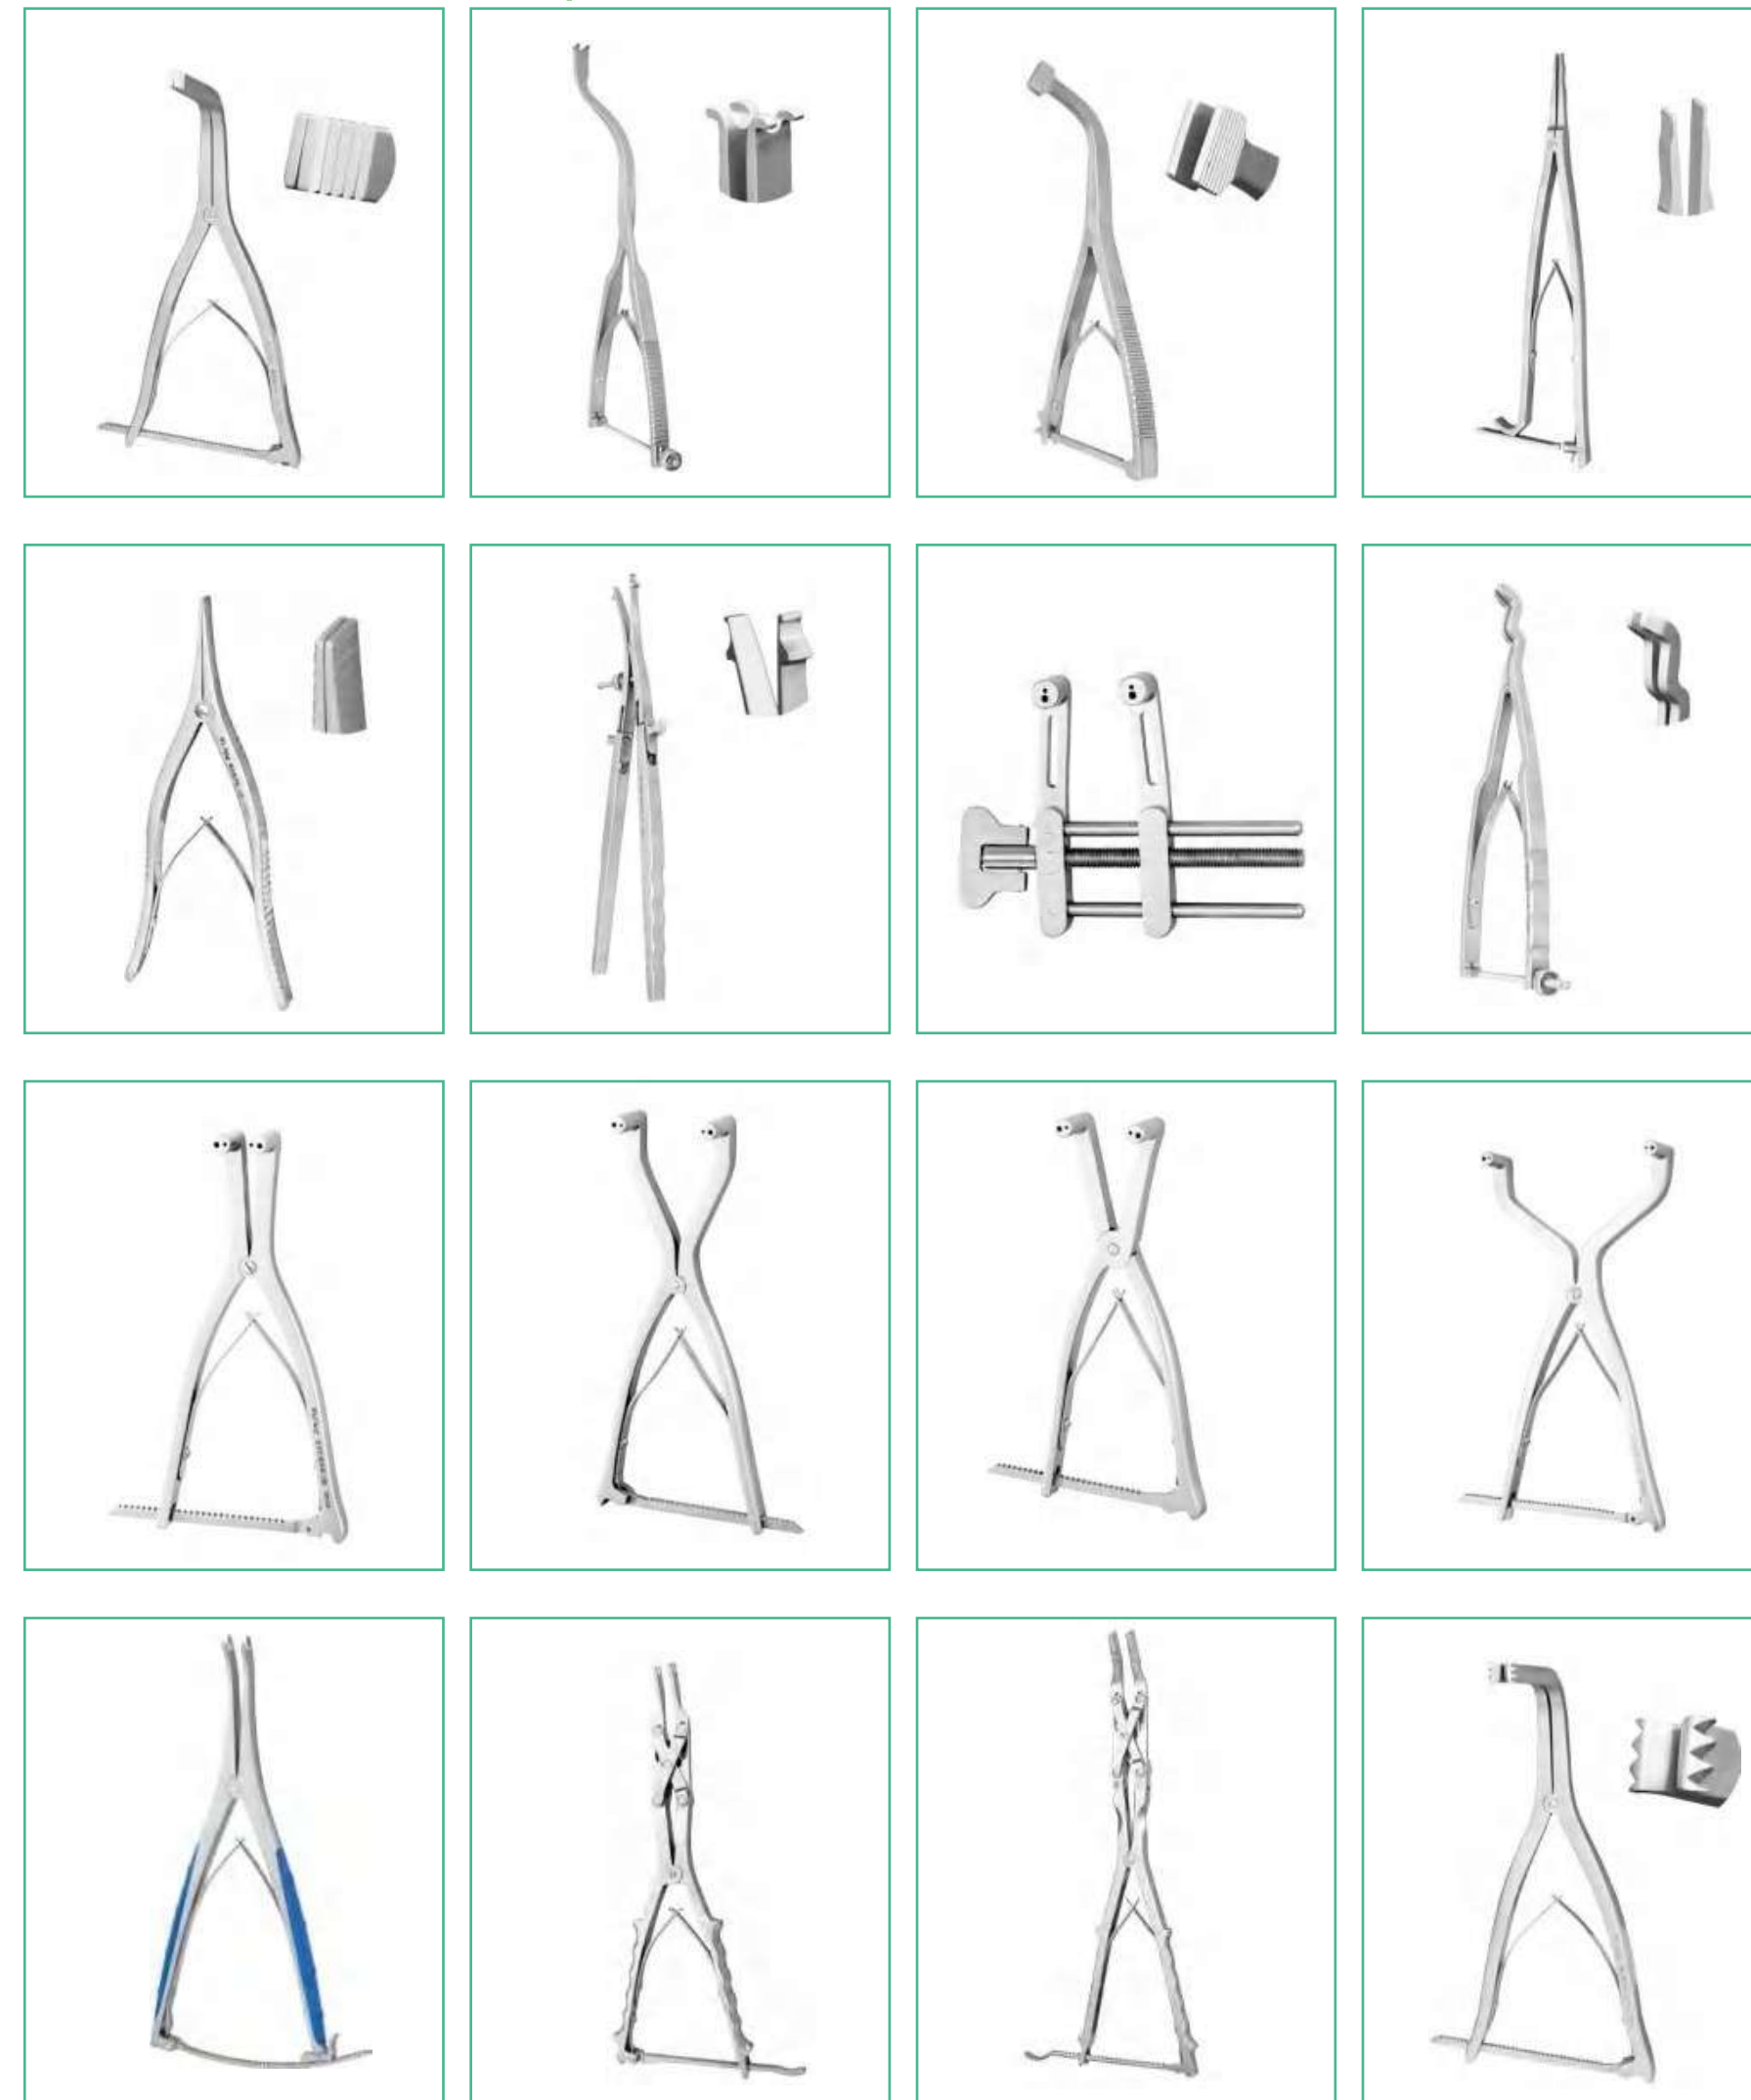

Orthopedic surgical instrument kit

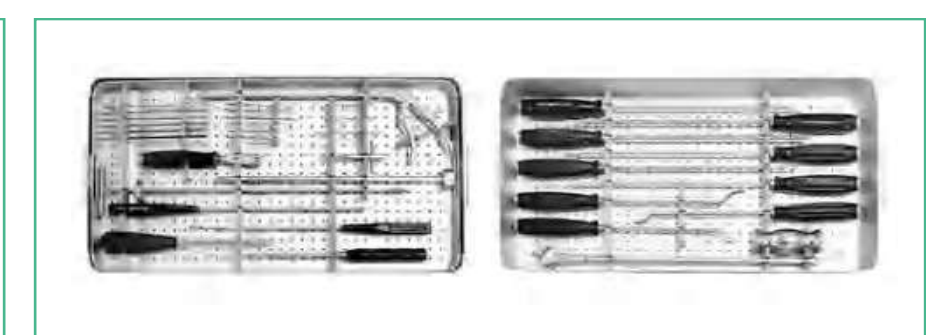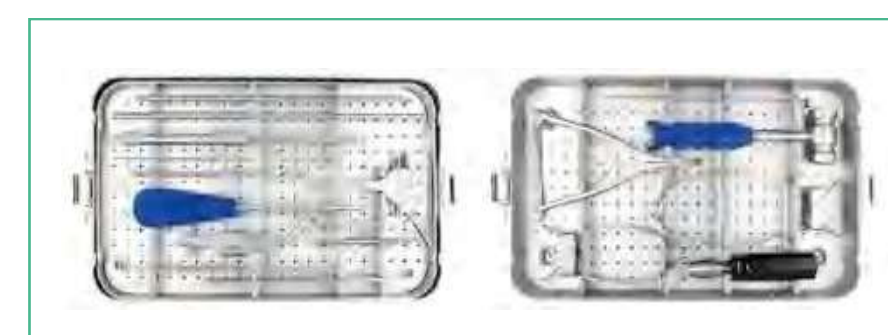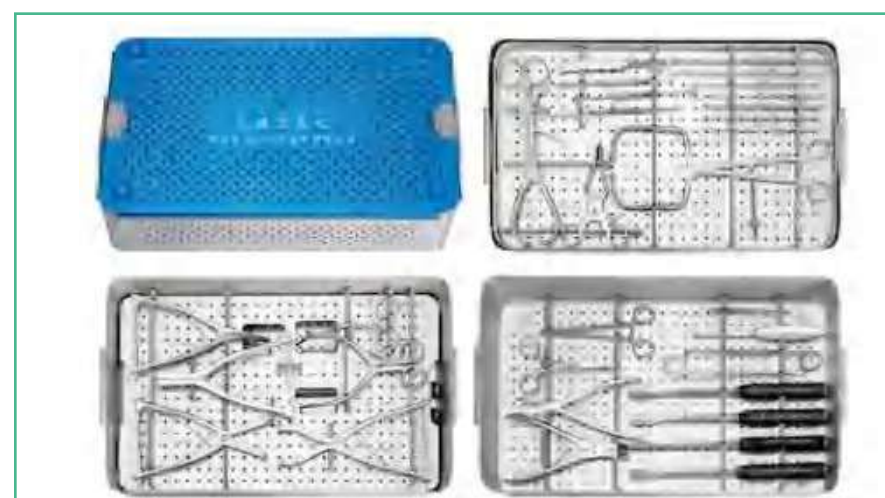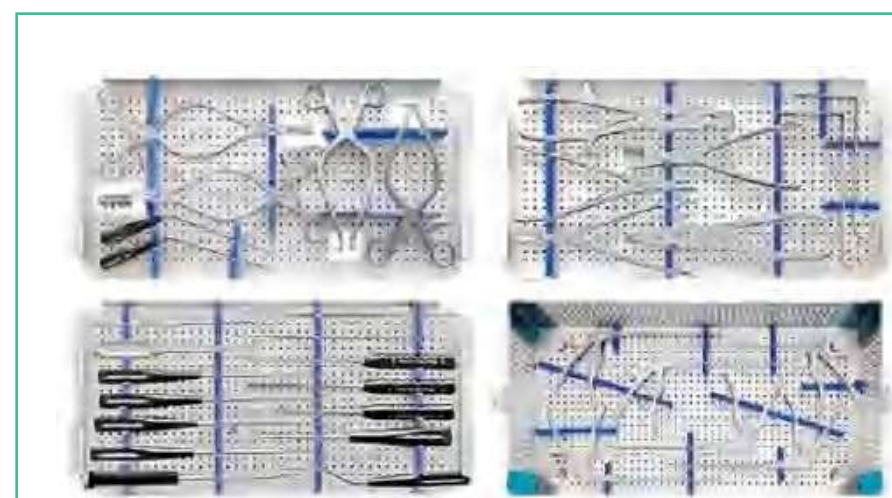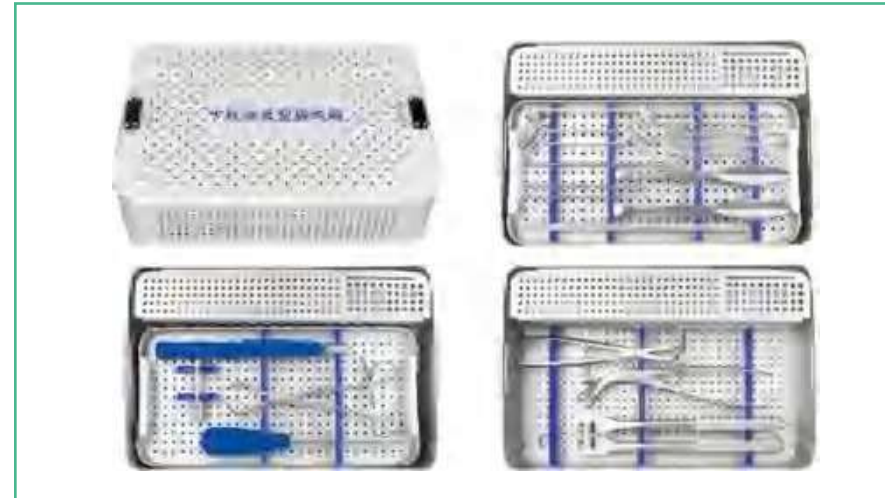

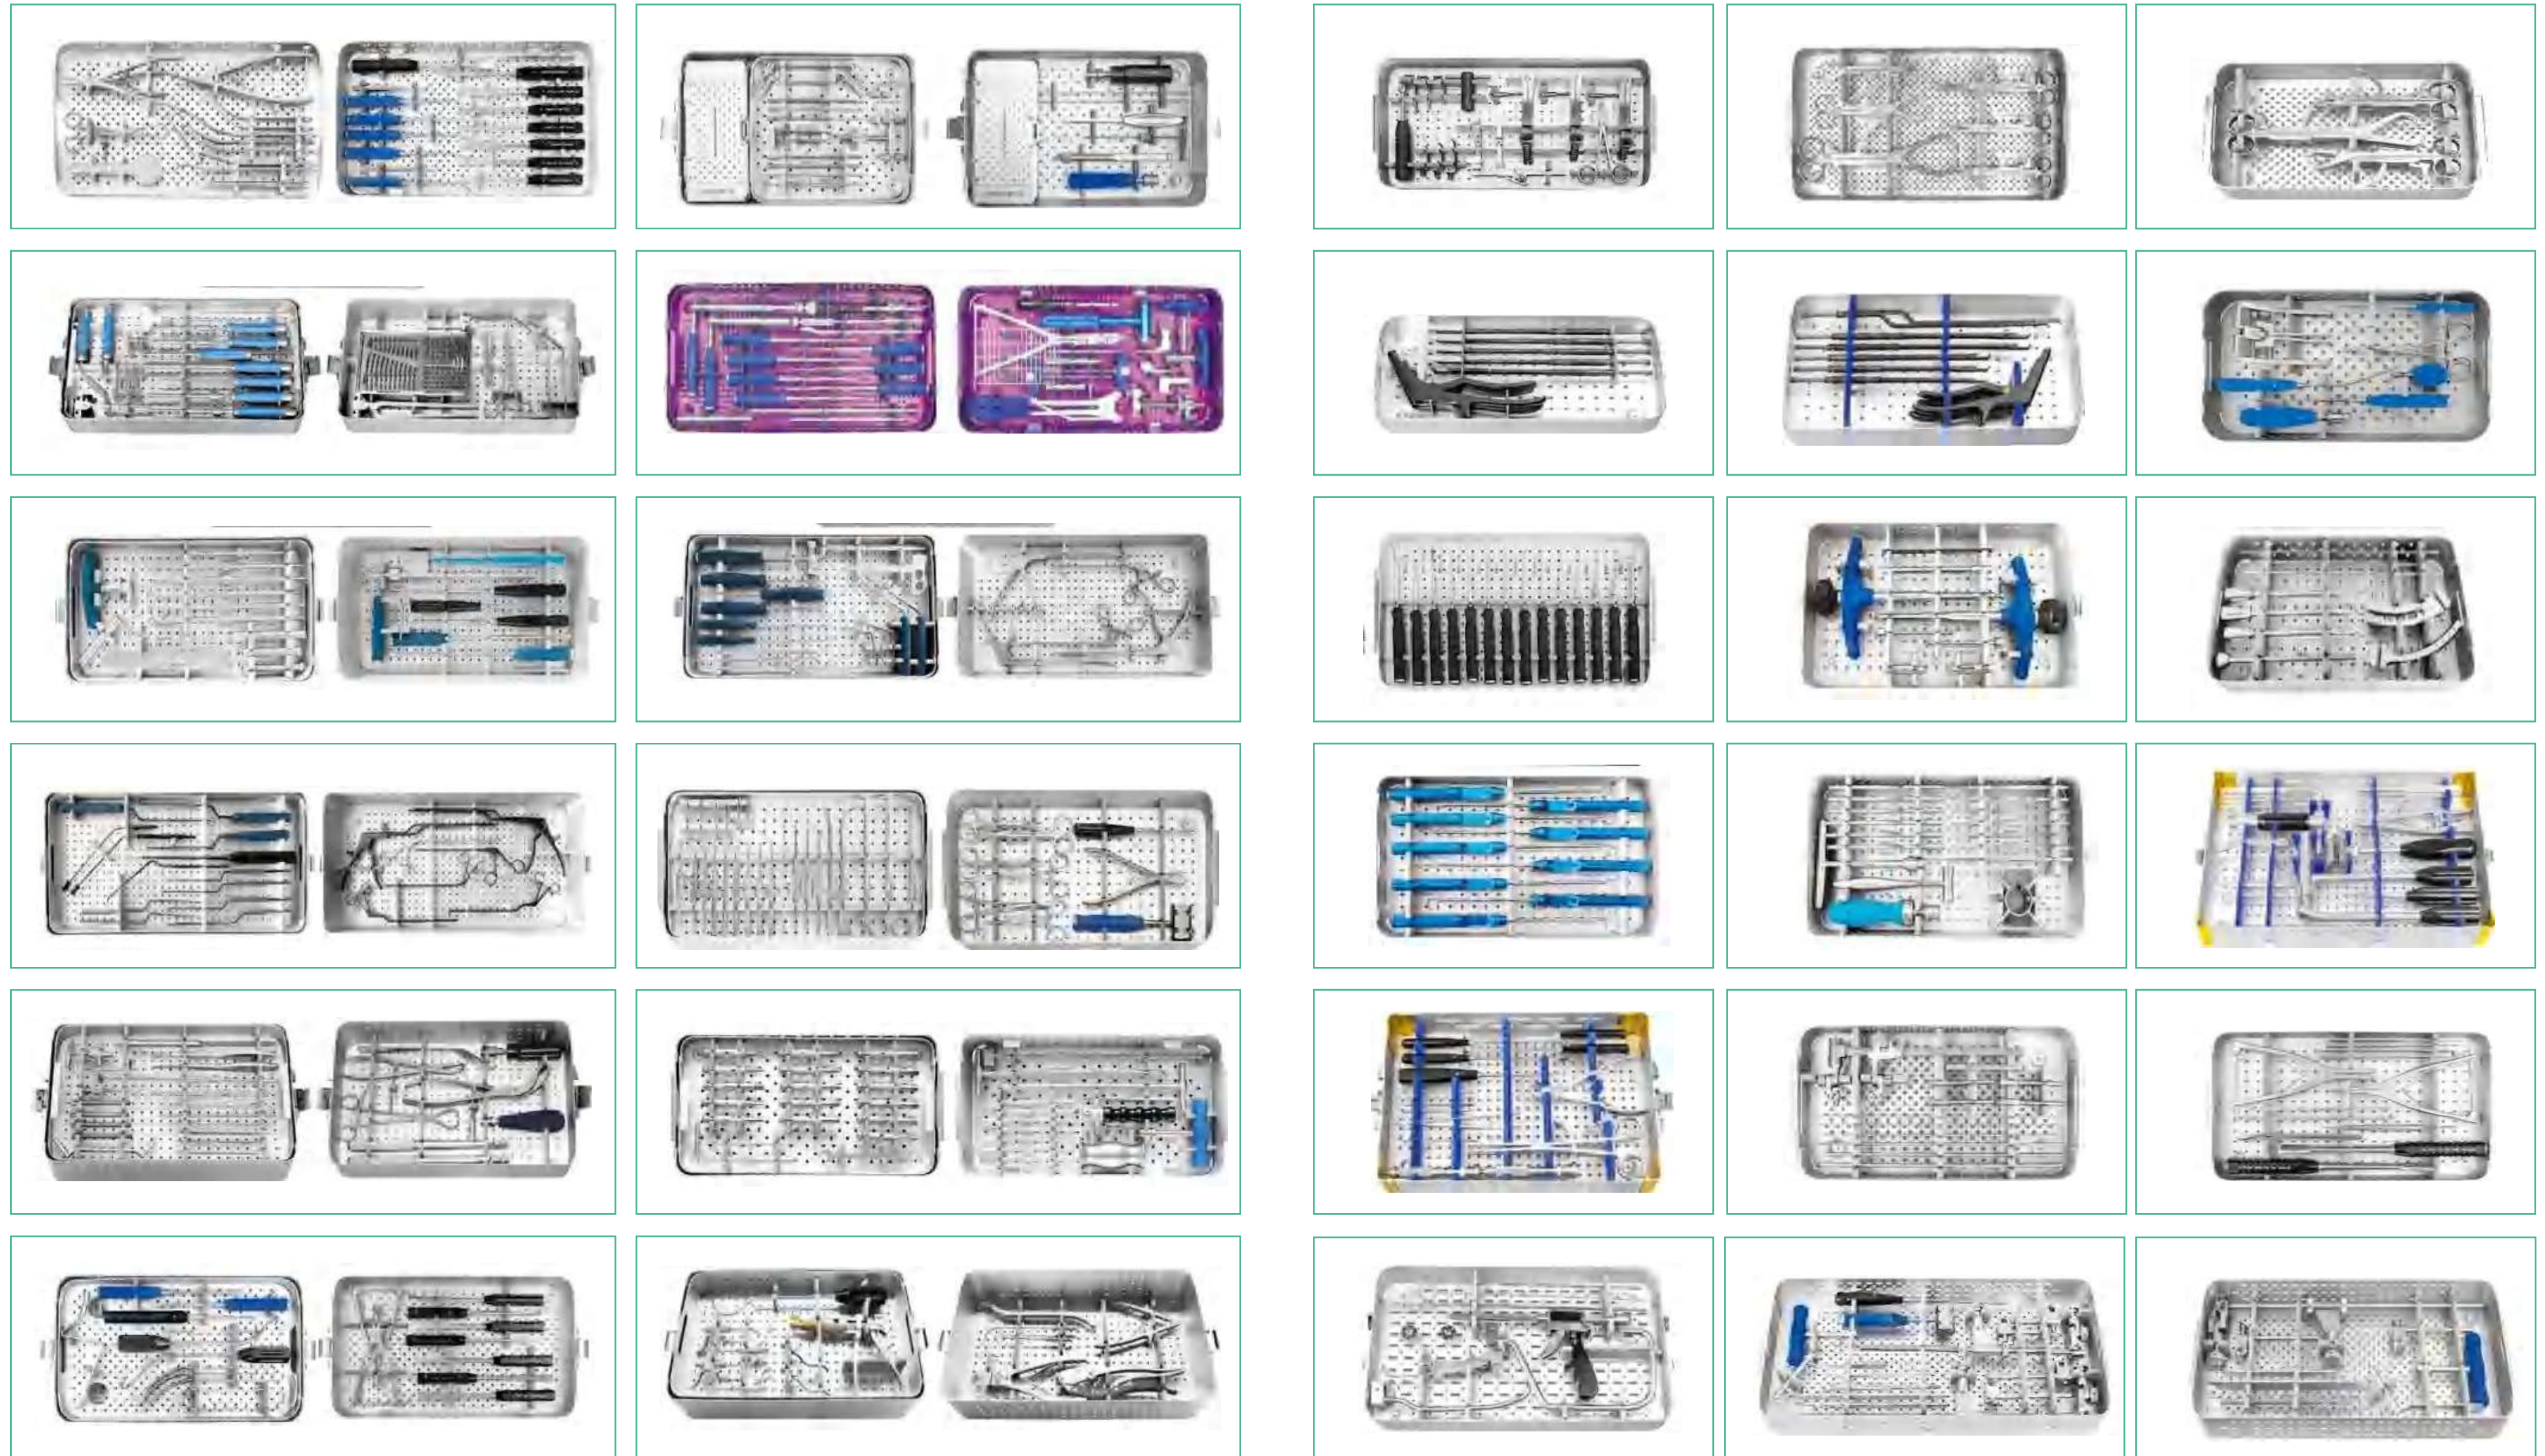

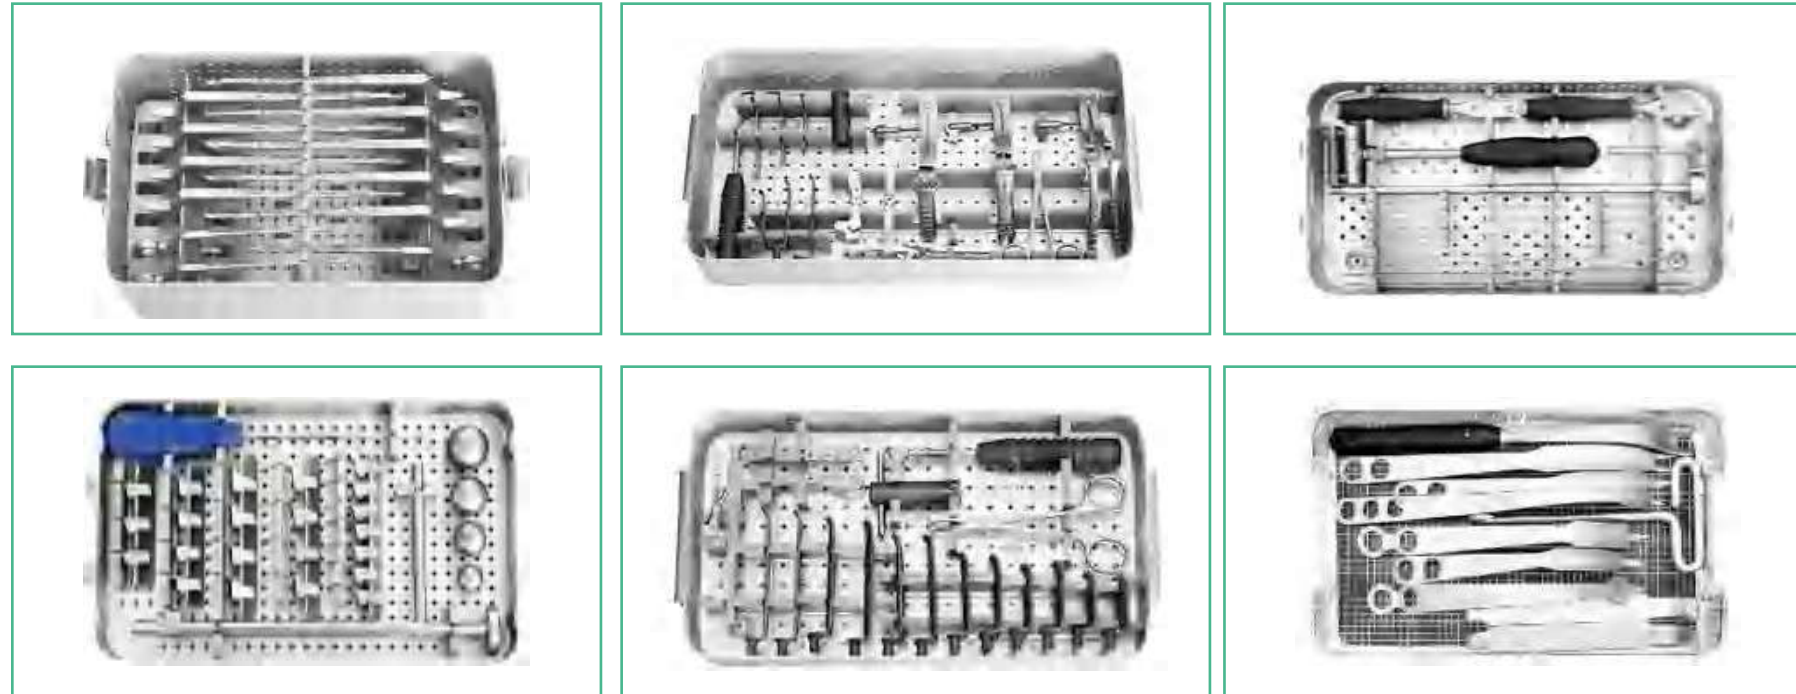

■ Pegged box





Stainless steel tissue forceps



Stainless steel dental forceps



Stainless steel tissue forceps



Stainless steel Common operation scissors



Stainless steel gun-shape



Stainless steel dressing forceps



Stainless steel cloth forceps



Stainless steel T-shaped open instrument



Stainless steel hemostatic forceps



Stainless steel technical needle forceps



Stainless steel uterine probe



Suction tube for induced abortion



Stainless steel tongue forceps



Stainless steel gauze and bandage scissors



Stainless steel medicine



Stainless steel healthcare scalpel hilt



Stainless steel cervix dilator



Stainless steel tongue spatula



Skin tissue pulling bender



Thyroid gland pulling bender



Stainless steel uterine cutet



Woman ligation finger



Stainless steel druy delivery cart



Stainless steel trumpet anoscope



Stainless steel sponge forceps



finger forceps with any size



Stainless steel loudspeaker anoscope



Stainless steel large pincers anoscope



Stainless steel vaginoscope



Vagina pulling bender



Stainless steel nasoscope



Aluminum Lunch-Box-Style Needle Tube Sterilizer(with holes)



Aluminum tube frame



aluminium needle box



Stainless Steel Urinal(hand-carry)



Stainless Steel Mouth Sterilier



aluminium needle box



aluminium needle box



Stainless steel disinfectant dish



Stainless steel disinfectant dish



Stainless Steel Test Tube Rack



Stainless Steel Sterile Bottle Rack



Stainless Steel Disinfectant Square Dish



Stainless Steel Treatment Plate(with bottles)



Stainless steel dressing box



Stainless Steel Bedpan



Stainless steel treatment plate (witout bottles)



Sterilized bottles

■ Disposable Endo Linear Cutter Stapling Reloads



Equipment Specification

Product Code	Color Cartridge	Number of Staples	Tissue Thickness	Open Stapler Height	Closed Stapler Height	Gripping Surface
CGST60W	White	88	Mesentery/thin	2.6mm	1.0mm	✓
CGST60B	Blue	88	Regular	3.6mm	1.5mm	✓
CGST60D	Gold	88	Regular/thick	3.8mm	1.8mm	✓
CGST60G	Green	88	Thick	4.1mm	2.0mm	✓
CECR60B	Blue	88	Regular	3.5mm	1.5mm	
CECR60D	Gold	88	Regular/thick	3.8mm	1.8mm	
CECR60G	Green	88	Thick	4.1mm	2.0mm	

Main feature and Benefit

- Compatible design ensure easy replacement.
- Gripping surface design provide outstanding stapling performance.
- Multiple models can satisfy every demands of different surgeries.
- Medical level materials ensure no tissue rejection.

Compatibility

Apply to ECEHLON Series 60mm Stapler.



■ Endoscopic Linear Cutter Stapler & Loading Units



Rotating Cartridge



- 11 adjusting degrees
- 45° maximum left and right
- Convenient and accurate access to target tissue and blood vessels

Ladder Type Cartridge



- Stepwise clipping tissue
- Broad tissue adaptability

Large Release Button



- Super non-slip design
- Easy to use

Thinner Cartridge design



- Apply for 12mm Trocar
- Improve the versatility of the devices

Better holding method



- Easy access to narrow spaces
- Reduce damage and risk of tissue separation
- More convenient to hold tissue.

Strengthen Anvil Design




- Improve power of tissue closure
- Ensure the firing effect of each pin is consistent

The Basic Dimension of Endoscopic Linear cutter Stapler:

Product Name	Type	Length (mm)	tolerance
Handle	P-ED12-S	60	± 2.0
	P-ED12-C	155	
	P-ED12-L	240	

■ Disposable Tissue Closure Clamp

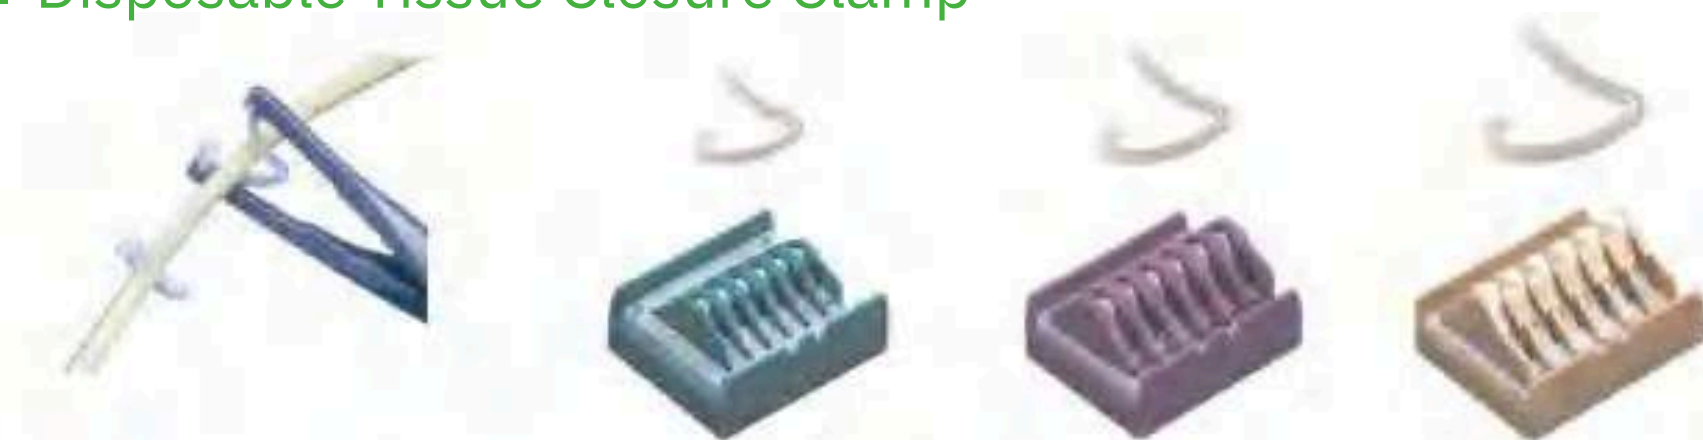

Main Operation Steps



1. Open packing, take out base



2. Tear off the dry glue under base.



3. Paste base on right place.



4. Put the forceps' head into the base.



5. At the same time hold the base to ensure the clamp to remove from the base successfully.



6. To ensure clear vision around the ligated vessels or tissue, then put tissue into single tooth of clamp, located the clamp around the tissue.



7. Exert enough force in handle of tissue forceps on the occlusal surface to close locking catch, until hear "click"



8. Loose the handle of tissue forceps, in order to do next operation.




9. Operation completes.

Attentions:

1. Don't use for ligation of oviduct.
2. Don't use for tissue marking.
3. Don't use for artery ligation in biopsy of kidney by endoscopy.

■ Disposable Skin Stapler


Easy operation, flexible and convenient, pin out and suture smoothly and accurately, safe, high-efficiency and quickly.

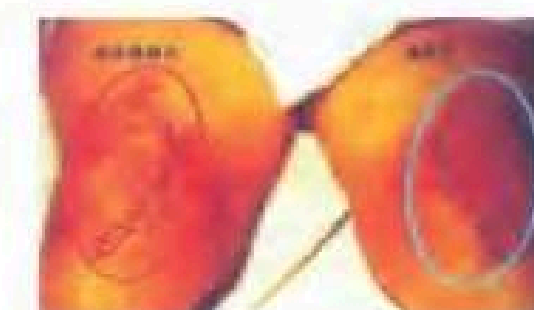

Compare with traditional manual suturing




Wound healing situation after operation

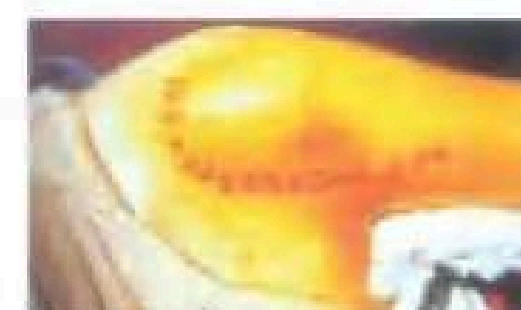

Effect of suturing shoulder's incision



Wound healing after removing staples

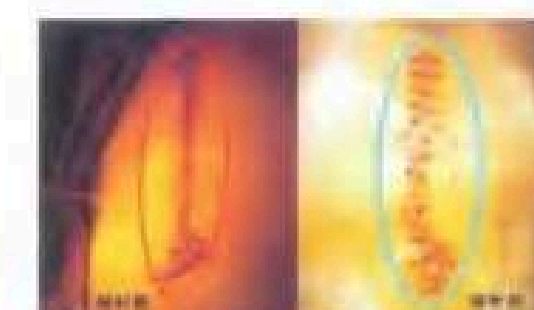

Compare before with after removing staples of laparotomy



Effect of suturing head's incision



Wound healing situation after operation



Compare before with after removing staples of thoracotomy

Specific instruction: Non-stop when fire every staple.

■ Disposable Circular Stapler




- Indicator window shows clearly and precisely for the thickness of tissue.
- Reasonable staples density to reduce hemorrhage after operation.
- Imported titanium wire to offer better strength and degree of stretch.

■ Disposable Linear Cutter Stapler



- Bigger jaw, easier to adjust position.
- Unique firing button, in favor of left and right hand operation.
- The intermediate locking mechanism is more convenient and reliable to lock.
- Imported titanium wire to offer better strength and degree of stretch.

■ Disposable PPH Stapler

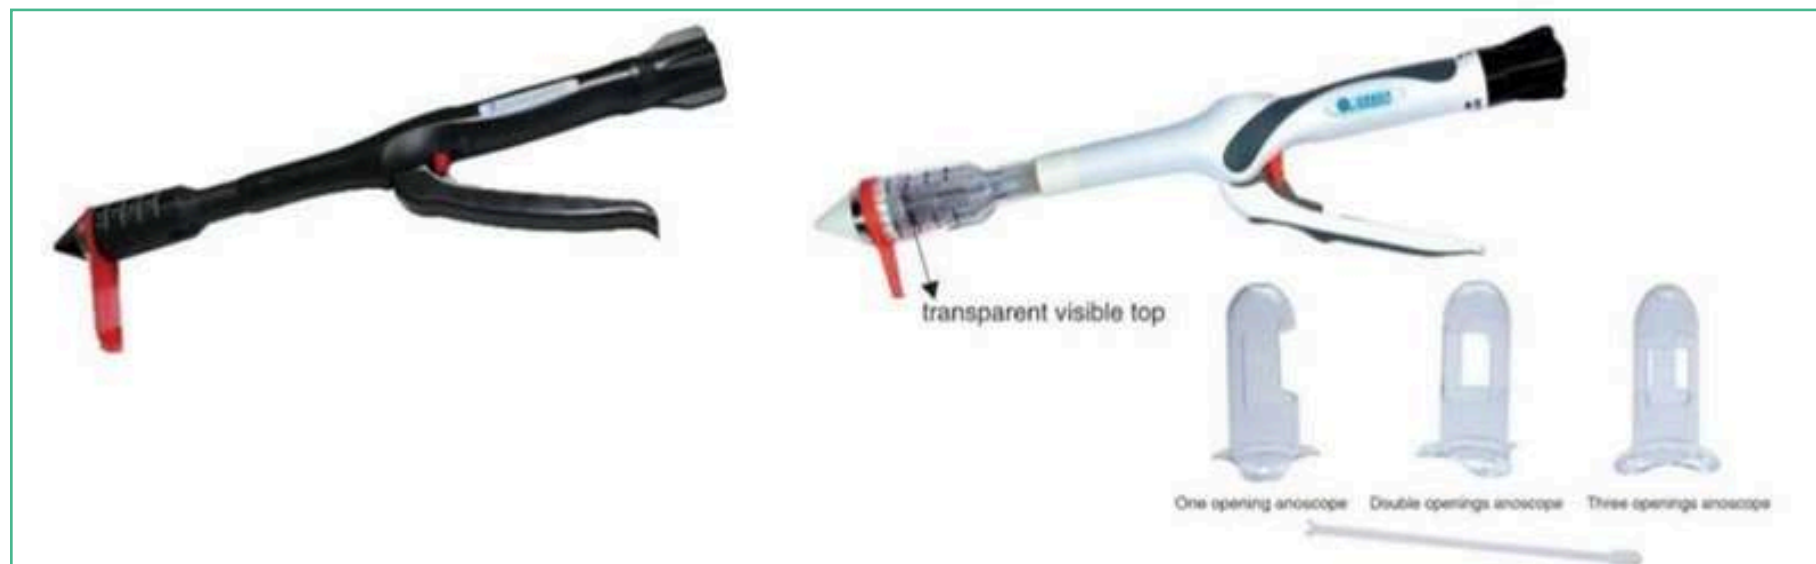

■ Disposable Circumcision Stapler



- Replace conventional circumcision surgery.
- Well hemostasis effect.
- Simple & safe operation shorten time.
- Fast postoperative recovery, reduce the pain of patients.

■ Disposable Curved Cutter Stapler



- Imported titanium wire to offer better strength and degree of stretch.
- One step forming anvil to ensure the staples formed completely.
- Offer 4 rows of curved staples to make the tissue anastomosis more tightly.
- Visible curved head-designed to expose anatomy better for surgery.

■ Disposable Linear Stapler



Disposable Trocar



Equipment Specification

Type	Awl External diameter		Cannula Internal Diameter		Cannula Length		Puncture Cannula Length		Awl Length	
	Size	Tolerance	Size	Tolerance	Size	Tolerance	Size	Tolerance	Size	Tolerance
P-TC-5	5.5	+0.3 0	6	+0.3 0	112	± 2.0	160	± 2.0	205	± 2.0
P-TC-10	10.3		10.4							
P-TC-12	12.8		12.9							
P-TC-15	15.2		15.7							

Application procedures

Puncturing abdominal cavity, supplying gas during laparoscopic surgery, and provide channels for operation instruments.

Disposable Incision Protector



Equipment Specification

Classify	Type	Outer Ring Diameter (mm)	Inner Ring Diameter (mm)	Incision length (mm)	Clinical Application (only reference)
Silica Gel	PQB40/30-15/20	40	30	10-15	Thoracoscopy (laparoscopic entering hole)
	PQB50/40-25/25	50	40	20-25	Thoracoscopy (laparoscopic entering hole), Suspension laparoscope (laparoscopic entering hole), Abdominal small incision operation (For example: Appendiceal operation, gynaecological accessory operation, etc)
	PQB70/70-35/25 PQB70/70-35/40	70	70	30-35 35-40	Breast, thyroid surgery Suspension laparoscope (laparoscopic entering hole), Abdominal small incision operation (For example: Appendiceal operation, gynaecological accessory operation, etc)
	PQB120/100-60/40	120	100	50-60	Small incision in cardiothoracic surgery (Esophagus, thymus, etc)
PU	PQA60/70-60/150	60	70	30-50	Gasperitoneoscope, small incision abdominal surgery
	PQA80/90-80/150	80	90	50-70	
	PQA120/130-120/250	120	130	80-110	Various kinds of open surgery, such as: gastrointestinal surgery, Urology, gynecological tumor, gynecology and obstetrics
	PQA150/160-150/250	150	160	100-140	
	PQA180/190-180/250	180	190	120-160	
	PQA220/230-220/250	220	230	150-190	
	PQA270/280-270/250	270	280	230-270	
	PQA320/330-320/250	320	330	250-290	



IV Infusion stand



Stainless Steel Pail



Stainless Steel Operation Round Chair



Doctor chair/nurse chair



Stainless Steel Chromosome Rack



Stainless Steel Chromosome Rack



Stainless steel reflection light



Stainless steel stand for transfusion



Stainless steel pedal trash can



Stainless Steel Operation Round Chair



stainless steel storage opening shelf



change dressing shelf



Stainless steel folding screen



Stainless steel clean-hand-tub stand



Stainless steel square plate stand



Stainless Steel Checking bed for Women



Stainless steel clean-hand-tub stand



Stainless steel buckets in hand immersion



stainless Steel Gynecology Diagnose bed



lightweight maternity bed



Stainless quadrate apparatus (Doublesets)



Stainless quadrate apparatus



stainless steel baby for bed



ABS Complex Baby Cart (Vistyle)



Baby measuring meter



Stainless steel debridement truck



Stainless Steel Transfusion Cart



Stainless Steel Checking bed for Women



Stainless steel debridement truck



Stainless steel anesthesia truck



Stainless steel trolley cart
(two big wheels and two small wheels)



Stainless treat trolley



Stainless Steel Oxygen-bottle Trolley



Stainless Steel Oxygen-bottle Trolley



Stainless steel dressing change trolley



Stainless treat trolley



Stainless steel drug delivery cart



Stainless steel operation apparatus stand



Stainless steel injection cart



Stainless steel medical record locker



Stainless steel operation apparatus stand



Stainless steel operation apparatus stand



Stainless steel medical record locker



Stainless Steel Cabinet with Vacuum Flask and Towel Shelf (four feet)



Stainless steel working cart (three layers)



Stainless steel instrument cart



Stainless steel apparatus stand



Stainless steel trolley for water supplying



ABS Cabinet (1 door 2 drawers)



Stainless steel trash cart (L)



Stainless steel railing quilt car



Stainless steel rescaue cart



Stainless steel dirty clothes bag trolley



Stainless steel cleaning cart in the morning



Stainless steel rescaue cart



Stainless Steel ambulance cart



Stainless steel unrise trolley cart (four layers)



Stainless steel unrise trolley cart (three layers)



Stainless steel sisinfector trolley



Stainless Steel rescaue cart



Stainless steel look-over sickbed



Stainless steel examination bed with backrest



Stainless steel strrtcher trammers



Stainless steel strrtcher trammers
(two big wheels and two small wheels)



Stainless Steel Stretcher Cart(IVstyle)



Stainless Steel Stretcher Cart(Istyle)



Stainless steel instrumment cabiner



Stainless steel instrumment cabinet



Stainless Steel Patient Cart (Istyle)



Stainless Steel hoistsor lower the stretcher bed



Stainless Steel Aquas Preparing Cabinet



Saialess Seel Appliance Cabinet



Stainless Steel Medicine Cabinet



Stainless steel three boards and two crank sick bed



ABS Luxury Sickbed
(2 rockers without wheels)



Full Plastic Spray Sickbed
(2 folds and 1 rocker)



•Stainless steel two boards and one crank sickbed



Stainless steel even sick bed



Full Plastic Spray Sickbed
(3 folds and 2 rockers)



Emergency trolley



ABS Luxury Sickbed(flat bed without wheels)



ABS Luxury Sickbed(1 rocker without wheels)



Emergency trolley



Emergency trolley

■ Multifunctional electric hospital bed



- Cold steel plate wholly molded surface, integrated frame treated with electrostatic spraying. Anti-aging and anti-rust, IPX4 protection against water and dust, motors Standard protection class: IP54
- PE head and foot board removable for CPR function
- 4 pcs PE siderails, Convenient operation for patients and nurses.
- Standing function
- Battery backup, used in case of power failure
- Four dia125mm castors with central brake system



- Instant CPR release
- Bed High-Low, Head (Back Rest) Articulation, Knee(Foot Rest)Articulation
- Auto Contour (Head &Knee together moving function) Trendelenburg and
- Reverse Trendelenburg with controls on both sides and hand set
- Battery Back-up, Mobile-5" Casters adopt central control system, which is stable and reliable
- Three control mode: Attendant control panel at both side rail, hand set with Caregiver articulation lockout controls and foot switch

■ Five function electric bed with ACP



- Cold steel plate wholly molded surface, connected with arc soft join
- Streamline bed head board and railing made of PE
- 4 PCS automatic lifting railing embed design handset, can be fixed upward and downward,
- which can raise or lower the upper body, knees, bed frame height, trendelenburg and reverse trendelenburg.



- Cold steel plate wholly molded surface.
- Integrated stamping frame and treated with electrostatic spraying, anti-aging and antirust
- ABS bed head, 6 aluminum bars fence can go up and down.
- 3pcs electro-motor, 1pc control box,
- One set of handset
- Four wheels adopt central control system, which is stable and reliable
- Max Loading: 280 Kg
- Battery backup

■ Orthopedics bed



- ABS material headboard and foot end board
- Steel bed frame, stainless steel traction shelf
- 4sets manual crank systems, 1pc tilting pulling pole
- 4pcs urine hooks, 6pcs IV drip holes
- Optional choose luxurious double-face castors, 5" universal castors

■ Baby cabinet



- Baby cabinet in carbon steel material
- and bassinette in Acrylic plastic.
- Size: L820*W550*H900mm
- Can be made as assembling



■ Children's Bed



- Single manual crank system
- Frame is made of mild steel
- Totally enclosed bedside rail
- Bedside rail is possible to be adjusted to three altitudes

■ Baby Bassinet



- The height can be adjusted by gas spring, easy for mother and baby to communicate,
- Aluminum alloy column, transparent and hi-intensity baby basin



Remote control / Uv Lamp Germicidal Trolley



- Dual Tube Structure
- Orbit Design Base, easy For Installation
- Each Tube Can Be Used Independently
- Moveable And Foldable
- Built-in Type Tube Design
- Tube Angle Can Be Adjusted, 30° 60° 90° 180°
- Equipped With Timing Function
- Equipped With Sensor, If Lamp Sterilizer
- Turned On, If There Is Still Person In Room, The Lamp Will Not Be On, During Sterilization, If Person And An Animal Break Into The Room, The Lamp Will Be Alarmed And Off.

Ultra-Violet Germicidal Desk Lamp



- Tube Power: 36W
- Power: 220V 50Hz
- Timing mode: Electronic timing
- Applicable Static Space: 40
- Remote mode: 30 meters wireless remote control
- Timing Range: 15min 30min 60min

Anesthesia Machine



(Standard Model)



(Advanced Model)

Displayed image includes optional patient monitor

Common Features:

- Operating Modes: Pneumatically driven & electronically controlled, closed, semi-closed and semi-open
- Anesthesia Ventilator: Built-in 8.4 inch color TFT display, able to display Pressure-Time, Frequency-Time, Pressure-Volume and Frequency-Volume, displayed waveforms can be cycled instantly with a touch of a button
- Standard integrated metallic modular respiratory circuit: completely solves the problem of gas sealing under high temperature disinfection, easy to clean and disinfect
- Power Failure Support Functions: Automatically converts to backup power mode during AC power outages
- Equipped with electronic pressure differential flow sensor, imported respiratory control valve, stable and reliable, rapid response time
- High precision five tube flowmeter, fitted with interlocking oxygen-nitrous oxide supply, guarantees oxygen output is never lower than 21%
- Nonhazardous environmentally friendly frame, precise construction, elegant design, equipped with automated self-checking function during startup and an automatic self-calibrating sensor
- Alarms: Audible and/or visual alarms for tidal volume, airway pressure, oxygen concentration, asphyxia, power failure, oxygen failure and other alarms, also features a alarm query function
- Vaporizer: Imported tank components assembled locally, Enflurane, Isoflurane and Sevoflurane (Halothane optional). Also possesses self-compensating functionality
- Advanced and stable Adjustable Pressure Limiting (APL) valve, suitable for low and ultra low flow anesthesia
- Equipped with advanced international rotating Na-lime tank, easy-operate, requires only one hand, and uses imported PPSU material and temperature resistant to 134°C
- Multi-parameter Patient Model: Optional

Specifications

Model	JINLING-850 (Standard Model)	JINLING-850 (Advanced Model)
Display	8.4 inch TFT display	10.4 inch TFT display
Flowmeter Range	O ₂ : 0.1-10L/min	
	N ₂ O: 0.1-10L/min	
	Air: 0.1-10L/min	
Ventilation Mode	IPPV, SIPPV, VCV, IMV, SIMV, MANUAL, Standby	IPPV, SIPPV, VCV, PCV, IMV, SIMV, MANUAL, Standby
Back-up Power Supply	At least 4 hours	
Tidal Volume	Adjustable range: 20-1500ml	
	Display range: 0-2000ml	
Respiratory Rate	1-100bpm	
Inspiratory/Expiratory (I:E) Ratio	8:1-1:10 (capable of inverse ratio ventilation)	
PEEP Range	0-20cmH ₂ O (electronically controlled)	
Inspiratory Pressure Trigger Range	-10-10cmH ₂ O (electronically controlled)	
SIGH	1 sigh breath in every 80-120 breaths	
Inhaled Oxygen Concentration Monitor	21-100%	
SIMV Rate	1-20bpm	
Inspiratory Plateau	0-1 second	
Vaporizer Concentration Ranges	0-5%	
Vaporizer Slots	Double PA-I type slots	



Features

- Operating Modes: Pneumatically driven & electronically controlled, closed, semi-closed and semi-open
- Anesthesia Ventilator: Built-in 5.7 inch TFT display, able-display Pressure-Time and Frequency-Time, displayed waveforms can be cycled instantly with a touch of a button
- Standard integrated metallic modular respiratory circuit; completely solves the problem of gas sealing under high temperature disinfection, easy to clean and disinfect
- Equipped with electronic pressure differential flow sensor, imported respiratory control valve
- Vaporizer: Imported tank components assembled locally; Enflurane, Isoflurane and Sevoflurane (Halothane optional). Also possesses self-compensating functionality
- High precision four tube flowmeter, fitted with interlocking oxygen-nitrous oxide supply, guarantees oxygen output is never lower than 21%
- Nonhazardous environmentally friendly frame, with automated self-checking function during startup and an automatic self-calibrating sensor
- Power Failure Support Functions: Automatically converts to backup power mode during AC power outages
- Alarms: Audible and/or visual alarms for tidal volume, airway pressure, asphyxia, power failure, oxygen failure and other alarms, also features a alarm query function
- Equipped with advanced international rotating Na-lime tank, uses imported PPSU material and temperature resistant to 134°C
- Multi-parameter Patient Model: Optional

Specifications

Model	JINLING-820
Display	5.7 inch TFT display
Flowmeter Range	O ₂ : 0.1-10L/min N ₂ O: 0.1-10L/min
Ventilation Mode	IPPV, SIPPV, VCV, IMV, SIMV, MANUAL
Back-up Power Supply	At least 4 hours
Tidal Volume	Adjustable range: 50-1500ml Display range: 0-2000ml
Respiratory Rate	1-100bpm
Inspiratory/Expiratory (I:E) Ratio	8:1-1:10 (capable of inverse ratio ventilation)
PEEP Range	0-20cmH ₂ O (electronically controlled)
Inspiratory Pressure Trigger Range	-10-10cmH ₂ O (electronically controlled)
SIGH	1 sigh breath in every 60-120 breaths
SIMV Rate	1-20bpm
Inspiratory Plateau	0-1 second
Vaporizer Concentration Ranges	0-5%
Vaporizer Slots	Single PA-I type slot



(Economic Model)



(Standard Model)



(Advanced Model)

Common Features

- Operating Modes: Pneumatically driven & electronically controlled, closed, semi-closed and semi-open
- Anesthesia Ventilator: Built-in 5.4 inch TFT display, able-display Pressure-Time and Frequency-Time, displayed waveforms can be cycled instantly with a touch of a button
- Standard integrated metallic modular respiratory circuit; completely solves the problem of gas sealing under high temperature disinfection, easy to clean and disinfect
- Nonhazardous environmentally friendly frame, precise construction, elegant design, equipped with automated self-checking function during startup and an automatic self-calibrating sensor
- High precision two tube flowmeter, fitted with interlocking oxygen-nitrous oxide supply, guarantees oxygen output is never lower than 21%
- Oxygen failure alarm is supported by the anesthetic gas delivery system, when the oxygen supply within the circuit or cylinder falls below 0.20 MPa, a alarm will sound and the nitrous oxide will be cutoff
- Power Failure Support Functions: Automatically converts to backup power mode during AC power outages
- Alarms: Audible and/or visual alarms for tidal volume, airway pressure, power failure, oxygen failure and other alarms, also features a alarm query function
- Equipped with infrared turbine flow sensor; precisely measures gas flows, stable and reliable
- Vaporizer: Imported tank components assembled locally; Enflurane, Isoflurane and Sevoflurane (Halothane optional). Also possesses self-compensating functionality
- Equipped with advanced international rotating Na-lime tank, easy-operate, requires only one hand, and uses imported PPSU material and temperature resistant to 134°C
- Multi-parameter Patient Model: Optional

Advanced Model Exclusive Features

- Vaporizer with dual tank design, effective for extending surgical lengths and features interlocking tank capability

Specifications

Model	JINLING-01B (Economic Model)	JINLING-01B (Standard Model)	JINLING-01B (Advanced Model)
Display	5.4 inch TFT display		
Flowmeter Range	O ₂ : 0.1-10L/min N ₂ O: 0.1-10L/min		
Ventilation Mode	IPPV, SIPPV, IMV, SIMV, MANUAL		
Back-up Power Supply	At least 4 hours		
Tidal Volume	Adjustable range: 50-1500ml Display range: 0-2000ml		
Respiratory Rate	1-99bpm		
Oxygen Supply Flow Rate	25-75L/min		
Inspiratory/Expiratory (I:E) Ratio	4:1-1:10 (capable of inverse ratio ventilation)		
Inspiratory Pressure Trigger	-10-10cmH ₂ O (electronically controlled)		
SIGH	1 sigh breath in every 80-160 breaths		
Vaporizer Concentration Range	0-5%		
Vaporizer Slots	Single PA-80 type slot	Single PA-I type slot	Double PA-I type slots
Gas Supply Pressure	O ₂ : 0.32MPa-0.6MPa; N ₂ O: 0.32MPa-0.6MPa		



(Standard Model)



(Advanced Model)

Common Features

- Operating modes: Pneumatically driven & electronically controlled, closed, semi-closed and semi-open
- Anesthesia Ventilator: Built-in high visibility, wide angle LED alphanumeric data display
- Standard integrated metallic modular respiratory circuit; completely solves the problem of gas sealing under high temperature disinfection, easy to clean and disinfect
- High precision two tube flowmeter, fitted with interlocking oxygen-nitrous oxide supply, guarantees oxygen output is never lower than 21%
- Power Failure Support Functions: Automatically converts to backup power mode during AC power outages
- Fully metallic frame, precise construction, elegant design, equipped with automated self-checking function during startup and an automatic self-calibrating sensor
- Alarms: Audible and/or visual alarms for tidal volume, airway pressure, power failure, oxygen failure and other alarms
- Equipped with infrared turbine flow sensor; precisely measures gas flows, stable and reliable
- Vaporizer: Imported tank components assembled locally; Enflurane, Isoflurane and Sevoflurane (Halothane optional). Also possesses self-compensating functionality
- Equipped with advanced international rotating Na-lime tank, easy-operate, requires only one hand, and uses imported PPSU material and temperature resistant to 134°C
- Multi-parameter Patient Model: Optional

Advanced Model Exclusive Features

- Vaporizer with dual tank design, effective for extending surgical lengths and features interlocking tank capability

Specifications

Model	JINLING-01 (Standard Model)	JINLING-01 (Advanced Model)
Display	LED	
Flowmeter Range	O ₂ : 0.1-10L/min N ₂ O: 0.1-10L/min	
Ventilation Mode	IPPV, SIPPV, MANUAL	
Back-up Power Supply	At least 4 hours	
Tidal Volume	Adjustable range: 50-1500ml Display range: 0-2000ml	
Respiratory Rate	4-40bpm	
Inspiratory/Expiratory (I:E) Ratio	1:1.5-1:3.0	
Inspiratory Pressure Trigger	-10-10cmH ₂ O	
Vaporizer Concentration Ranges	0-5%	
Vaporizer Slots	Single PA-80 type slot	Double PA-80 type slots



Features & Specifications

- Operating Modes: closed, semi-closed and semi-open
- Standard integrated metallic modular respiratory circuit; completely solves the problem of gas sealing under high temperature disinfection, easy to clean and disinfect
- High precision two tube flowmeter, fitted with interlocking oxygen-nitrous oxide supply, guarantees oxygen output is never lower than 21%
- Flowmeter Range: O₂: 0.1-10L/min, N₂O: 0.1-10L/min
- Respiration Modes: Manual
- Alarms: Audible alarm for oxygen failure
- Vaporizer: Imported tank components assembled locally; Enflurane, Isoflurane and Sevoflurane (Halothane optional). Also possesses self-compensating functionality
- Vaporizer Concentration Ranges: 0-5%
- Equipped with advanced international rotating Na-lime tank, easy-operate, requires only one hand, and uses imported PPSU material and temperature resistant to 134°C

Ventilator



(Standard Model)



(Advanced Model)

Common Features

- Operating Modes: Pneumatically driven & electronically controlled, closed, semi-closed and semi-open
- Pneumatically driven electrically controlled ventilator, can be used for emergency clinical resuscitation and respiratory therapy
- Display: Built-in 10.4 inch color TFT fully adjustable display, able to display Pressure-Time, Frequency-Time, Pressure-Volume, Frequency-Volume and any two waveforms simultaneously on screen
- Trigger Types: Pressure trigger, Flow trigger
- Sigh: Ability to insert 1-8 sigh breaths in every 100 breaths, ventilation should be no less than 1.5 the tidal volume
- Features built-in dual electronic flow sensors and dual respiratory modules
- Power Failure Support Functions: Automatically converts-standby mode during AC power outages
- Monitor Parameters: tidal volume, respiration rate, airway pressure, I:E ratio, inspiratory & expiratory status, inspiratory trigger and others
- Equipped with infrared turbine flow sensor, precisely measures gas flows, stable and reliable
- 9 Level adjustable humidifier

Specifications

Model	PA-900B (Standard Model)	PA-900B (Advanced Model)
Display	10.4 inch high visibility color TFT display	
Ventilation Mode	A/C, SIPPV, IPPV, SIMV, PSIMV, PSV, CPAP, PCV, VCV, SPONT, MANUAL	
Minute Volume	Greater than or equal to 18L	
Back-up Power Supply	At least 4 hours	
Tidal Volume	Adjustable range: 20-1500ml, Display range: 0-2000ml	
Respiratory Rate	1-99bpm	
Inspiratory/expiratory (I:E) ratio	4:1-1:4	
PEEP	0-10cmH ₂ O	
SIMV Rate	1-20bpm	
Inspiratory Pressure Trigger	-10-10cmH ₂ O	
Trigger Sensitivity (flow)	1-10L/m	
Inspiratory Plateau	Adjustable from 0-50% of inspiratory time	
Adjustable Oxygen Concentration	45-100%	21-100%
Gas Supply Requirement	280 ~ 600 kPa medical grade oxygen and compressed air	
Pressure Limit	1.0kPa-6.0kPa	
Maximum Safe Operating Pressure	≤6.0kPa	
Tidal Volume Alarm	Upper Limit: 10~2000ml, Lower Limit: 0~1800ml	
Airway Pressure Alarm	Upper Limit: 0.1~6kPa, Lower Limit: 0~5kPa	
Oxygen Concentration Alarm	Upper Limit: 22~100%, Lower Limit: 21~80%	

- Nonhazardous environmentally friendly frame, precise construction, elegant design, equipped with automated self-checking function during startup and an automatic self-calibrating sensor
- Alarms: Audible and/or visual alarms for ventilation volume, tidal volume, oxygen concentration, asphyxia, airway pressure, intubation disconnection, low oxygen, power failure and other alarms, also features a alarm history query function

Advanced Model Exclusive Features

- Equipped with professional medical grade air compressor tailored for long clinical times and low noise requirements

Air Compressor

- Air Compressor: 220V AC±10%, 50±1Hz, 700VA, also features good protective grounding against electrical activity
- Output Gas Pressure: 0.4MPa±20%
- Continuous output gas flow greater than or equal to 20L/min
- Instantaneous output gas flow great than equal to 60L/min



(Standard Model)



(Advanced Model)

Common Features

- Operating Modes: Pneumatically driven & electronically controlled, closed, semi-closed and semi-open
- Pneumatically driven electrically controlled ventilator, can be used for emergency clinical resuscitation and respiratory therapy
- Nonhazardous environmentally friendly frame, precise construction, elegant design, equipped with automated self-checking function during startup and an automatic self-calibrating sensor
- Display: Built-in 10.4 inch high visibility color TFT display, able to simultaneously display Pressure-Time and Frequency-Time waveforms in real time
- Sigh: Ability to insert 1-8 sigh breaths in every 100 breaths, ventilation should be no less than 1.5 the tidal volume
- Equipped with infrared turbine flow sensor, precisely measures gas flows, stable and reliable
- Power Failure Support Functions: Automatically converts-standby mode during AC power outages
- 9 Level adjustable humidifier

Specifications

Model	PA-700B (Standard Model)	PA-700B (Advanced Model)
Display	10.4 inch high visibility color TFT display	
Ventilation Mode	A/C, IPPV, SIPPV, IMV, SIMV, Standby, SPONT, MANUAL	
Minute Volume	Greater than or equal to 18L	
Back-up Power Supply	At least 4 hours	
Tidal Volume	Adjustable range: 50-1500ml, Display range: 0-2000ml	
Respiratory Rate	1-99bpm	
Inspiratory/expiratory (I:E) Ratio	4:1-1:4	
PEEP	0-10cmH ₂ O	
SIMV Rate	1-20bpm	
Inspiratory Pressure Trigger	-10-10cmH ₂ O	
Inspiratory Plateau	Adjustable from 0-50% of inspiratory time	
Adjustable Oxygen Concentration	45-100%	21-100%
Gas Supply Requirement	280 ~ 600 kPa medical grade oxygen and compressed air	
Pressure Limit	1.0kPa-6.0kPa	
Maximum Safe Operating Pressure	≤6.0kPa	
Tidal Volume Alarm	Upper Limit: 10~2000ml, Lower Limit: 0~1800ml	
Airway Pressure Alarm	Upper Limit: 0.1~6kPa, Lower Limit: 0~5kPa	
Oxygen Concentration Alarm	Upper Limit: 22~100%, Lower Limit: 21~80%	

- Monitor Parameters: tidal volume, respiration rate, airway pressure, I:E ratio, inspiratory & expiratory status, inspiratory trigger and others
- Alarms: Audible and/or visual alarms for ventilation volume, tidal volume, oxygen concentration, asphyxia, airway pressure, intubation disconnection, low oxygen, power failure and other alarms, also features a alarm history query function

Advanced Model Exclusive Features

- Equipped with professional medical grade air compressor tailored for long clinical times and low noise requirements

Air Compressor

- Air Compressor: 220V AC±10%, 50±1Hz, 700VA, also features good protective grounding against electrical activity
- Output Gas Pressure: 0.4MPa±20%
- Continuous output gas flow greater than or equal to 20L/min
- Instantaneous output gas flow great than equal to 60L/min

■ Patient Monitor

Features

- Pneumatically driven electrically controlled ventilator, can be used for emergency clinical resuscitation and respiratory therapy
- Display: High visibility, wide angle LED alphanumeric data display, equipped with tactile analog parameter controls
- Equipped with high precision infrared turbine pressure and flow sensors
- Power Failure Support Functions: Automatically converts to standby mode during AC power outages
- Nonhazardous environmentally friendly frame, precise construction, elegant design, equipped with automated self-checking function during startup and an automatic self-calibrating sensor
- Alarms: Audible and/or visual alarms for tidal volume, airway pressure, power failure oxygen failure and other alarms.
- 9 Level adjustable humidifier

Specifications

Model	PA 500
Display	LED
Ventilation Mode	A/C, IPPV, SIPPV, IMV, SIMV, MANUAL
Minute Volume	Greater than or equal to 18L
Back-up Power Supply	At least 4 hours
Tidal Volume	Adjustable range: 50-1500ml, Display range: 0-2000ml
Output Oxygen	< 50%
Respiratory Rate	6-60bpm
Pressure Limit	1-6kPa
Inspiratory/Expiratory (I:E) Ratio	1:1.5-1:3.0
PEEP	1-10cmH ₂ O
SIMV Rate	1-12bpm
Inspiratory Pressure Trigger	-4-10cmH ₂ O
Maximum Safe Operating Pressure	≤ 6.0 kPa
SIGH	1 sigh breath in every 80-120 breaths
Airway Pressure Alarm	Upper Limit: 0.9~5.4kPa, Lower Limit:
Gas Supply Requirement	280~600 kPa medical grade oxygen



Features

- Display: 15.1 inch color TFT display, able to simultaneously display 9 types of vital signs including ECG, respiratory rate, blood oxygen and End-Tidal CO₂ waveforms
- Noninvasive blood pressure, heart rate, body temperature, peripheral oxygen saturation (SpO₂), respiratory rate & pulse rate recorded in a 1000 entry displayable and searchable historical statistics table
- Electrode Selection: 5 standard leads (RA, LA, RL, LL, V)
- Optional Languages: Chinese, English, Spanish, Turkish, Russian and French
- Retains heart rate, body temperature, peripheral oxygen saturation (SpO₂) and respiratory rate statistics for up to 72 hours
- Features pause, review and trending options when observing waveforms
- High precision noninvasive painless blood pressure measurement module, exceptional accuracy, great consistency, module equipped with twin hardware overvoltage protection
- Alarms: Audible and/or visual alarms for heart rate, peripheral oxygen saturation (SpO₂), noninvasive blood pressure and other alarms such as power disconnection or failure, alarm ranges fully adjustable
- Resistant to defibrillation & electro-surgical interference, highly stable and possesses a pacemaker suppression function
- Suitable for adults, pediatric and neonatal patients
- Capable of drug dosage calculation, titration tabling, demonstration mode, memory storage in case of power instability and other functions
- Real-time Battery Usage Monitoring: When battery levels are insufficient, a low power warning is issued by the TFT display
- Features independent oxygenation observation graph
- Optional built-in data recorder; records and exports text, waveforms and other information



Features

- Display: 15.1 inch color TFT display, able to simultaneously display 9 types of vital signs including ECG, respiratory rate and blood oxygen waveforms
- Noninvasive blood pressure, heart rate, body temperature, peripheral oxygen saturation (SpO₂), respiratory rate & pulse rate recorded in a 1000 entry displayable and searchable historical statistics table
- Electrode Selection: 5 standard leads (RA, LA, RL, LL, V)
- Optional Languages: Chinese, English, Spanish, Turkish, Russian and French
- Retains heart rate, body temperature, peripheral oxygen saturation (SpO₂) and respiratory rate statistics for up to 72 hours
- Features pause, review and trending options when observing waveforms
- High precision noninvasive painless blood pressure measurement module, exceptional accuracy, great consistency, module equipped with twin hardware overvoltage protection
- Alarms: Audible and/or visual alarms for heart rate, peripheral oxygen saturation (SpO₂), noninvasive blood pressure and other alarms such as power disconnection or failure, alarm ranges fully adjustable
- Resistant to defibrillation & electro-surgical interference, highly stable and possesses a pacemaker suppression function
- Suitable for adults, pediatric and neonatal patients
- Capable of drug dosage calculation, titration tabling, demonstration mode, memory storage in case of power instability and other functions
- Real-time Battery Usage Monitoring: When battery levels are insufficient, a low power warning is issued by the TFT display
- Features independent oxygenation observation graph
- Optional built-in data recorder; records and exports text, waveforms and other information



Features

- Display: 12.1 inch color TFT display, able to simultaneously display 9 types of vital signs including ECG, respiratory rate and blood oxygen waveforms
- Noninvasive blood pressure, heart rate, body temperature, peripheral oxygen saturation (SpO₂), respiratory rate & pulse rate recorded in a 1000 entry displayable and searchable historical statistics table
- Electrode Selection: 5 standard leads (RA, LA, RL, LL, V)
- Optional Languages: Chinese, English, Spanish, Turkish, Russian and French
- Retains heart rate, body temperature, peripheral oxygen saturation (SpO₂) and respiratory rate statistics for up to 72 hours
- Features pause, review and trending options when observing waveforms
- High precision noninvasive painless blood pressure measurement module, exceptional accuracy, great consistency, module equipped with twin hardware overvoltage protection
- Alarms: Audible and/or visual alarms for heart rate, peripheral oxygen saturation (SpO₂), noninvasive blood pressure and other alarms such as power disconnection or failure, alarm ranges fully adjustable
- Resistant to defibrillation & electro-surgical interference, highly stable and possesses a pacemaker suppression function
- Suitable for adults, pediatric and neonatal patients
- Capable of drug dosage calculation, titration tabling, demonstration mode, memory storage in case of power instability and other functions
- Real-time Battery Usage Monitoring: When battery levels are insufficient, a low power warning is issued by the TFT display
- Features independent oxygenation observation graph
- Optional built-in data recorder; records and exports text, waveforms and other information



Features

- Display: 8.4 inch color TFT display, able to simultaneously display 9 types of vital signs including ECG, respiratory rate and blood oxygen waveforms
- Noninvasive blood pressure, heart rate, body temperature, peripheral oxygen saturation (SpO₂), respiratory rate & pulse rate recorded in a 1000 entry displayable and searchable historical statistics table
- Electrode Selection: 5 standard leads (RA, LA, RL, LL, V)
- Optional Languages: Chinese, English, Spanish, Turkish, Russian and French
- Retains heart rate, body temperature, peripheral oxygen saturation (SpO₂) and respiratory rate statistics for up to 72 hours
- Features pause, review and trending options when observing waveforms
- High precision noninvasive painless blood pressure measurement module, exceptional accuracy, great consistency, module equipped with twin hardware overvoltage protection
- Alarms: Audible and/or visual alarms for heart rate, peripheral oxygen saturation (SpO₂), noninvasive blood pressure and other alarms such as power disconnection or failure, alarm ranges fully adjustable
- Resistant to defibrillation & electro-surgical interference, highly stable and possesses a pacemaker suppression function
- Suitable for adults, pediatric and neonatal patients
- Capable of drug dosage calculation, titration tabling, demonstration mode, memory storage in case of power instability and other functions
- Real-time Battery Usage Monitoring: When battery levels are insufficient, a low power warning is issued by the TFT display
- Features independent oxygenation observation graph
- Optional built-in data recorder; records and exports text, waveforms and other information

BABY INCUBATOR

- Incubator and warmer work mode, servo controlled by micro-computer, convert automatically
- Multi audible and visual alarm functions, self-testing function
- 8" rotatable and movable color LCD display touchscreen with day & night modes
- Observe light with brightness adjustable, one tray and one big drawer
- Temperature trend for 24 hours
- Infant bed can be pulled out bidirectionally
- USB, RS-232 connector, SD card slot
- Foot pedal electric elevator

INCUBATOR:

- Temp control mode: Air and Skin mode
- Humidity control system, oxygen concentration control system
- Two skin temp sensors for measurement of central and peripheral
- Set temperature, air temperature, baby skin temperature, humidity, oxygen concentration, timer and heating power, SpO₂ are displayed separately
- >37°C temperature set function
- Triple protection for over temperature with separate cut off device, more safety system
- Double wall hood, 4 operating windows, 1 iris port
- 9 big infusion seals, independent locking device
- Oxygen inlet

WARMER:

- Control mode: Pre-warm, manual and automatic mode
- Carbon steel heater more effective
- Special design inclined heater head is more convenient for X-ray image
- Bigger mattress, electric infant bed tilt ±12°
- Transparent protector can be fold down with damping function
- Baby weight system, X-ray cassette tray
- Optional:
Down side phototherapy, CCD camera



- Air and skin temperature mode servo controlled by micro-computer
- 10" color LCD display touchscreen with air and skin temperature graph
- Humidity control system, oxygen concentration control system, baby weight system
- Multiple audible and visual alarm function, self-testing function
- Double fan, air curtain structure, better temperature uniformity, reduce heat loss during operation
- The left and right doors can be both open, with damping function independent locking device for both door
- Electronic bed tilting, $\pm 12^\circ$ step-less adjustable, The bed can be pulled out from both sides
- Two skin temp sensors for measurement of central and peripheral
- Observe light with brightness adjustable
- The height of whole unit can be adjusted, double pedal switch
- $>37^\circ\text{C}$ temperature set function
- Set temperature, air temperature, baby skin temperature, humidity, oxygen concentration, timer and heating power, SpO2 are displayed separately
- The drawer can be pulled out from both sides
- Double wall hood, 4 operating windows, 1 iris port, 9 big infusion seals
- X-ray cassette tray
- RS232 connector, Oxygen inlet, 1 tray
- Optional:
Double LED phototherapy



■ Transport Incubator

- Air mode and Baby mode controlled by micro-computer
- Use AC Power and DC Power alternatively, DC12V or DC 24V Power on the ambulance
- Set temperature, air temperature, skin temperature and internal battery power can be displayed by LED
- Self-testing function, multi audible and visual alarm function
- Double wall hood with 4 operating windows, 1 iris ports and 6 infusion seals
- The infant bed can be pulled out from side door easily
- Natural air flow humidity
- The height of whole unit can be adjusted
- Oxygen supply system
- LED observe light, adjustable brightness
- Optional:
Ambulance type trolley, humidity display, oxygen concentration control, SpO2



Ambulance type trolley



INFANT RADIANT WARMER SERIES

- Microprocessor based servo controlled temperature system
- Three modes: pre-warm, manual and automatic
- Audible and visual Alarm functions :
Power failure, temperature deviation, temperature sensor failure, skin temperature failure, over temperature
- Skin temperature, auxiliary temperature and ambient temperature are displayed separately
- Built-in breath combination mode (negative pressure suction, continuous oxygen infusion, cardiopulmonary resuscitation)
- 10" LCD colorful touch screen
- Carbon steel heater more effective
- Separate keyboard lock to prevent misoperation
- Special design inclined heater head is more convenience for X-ray image
- Convenient X-ray cassette tray under infant bed
- Integral timer to record therapy time
- Electric infant bed step-less adjustable tilt $\pm 12^\circ$
- Four transparent protector with 12 infusion seals can be flipped and removed, damping slow down
- The height of whole unit can be adjusted, pedal switch
- LED observation light, lighting direction 360° adjustable
- The tray is adjustable up and down
- With oxygen supply system, LED phototherapy, baby weight system, pulse oximeter
- With RS-232 connector and 1 big drawer



141

- Microprocessor based servo controlled temperature system
- Control modes: pre-warm, manual and automatic
- Audible and visual alarm functions: Power failure, temperature deviation, temperature sensor failure, skin temperature failure, over temperature
- 8" LCD colorful touch screen
- Carbon steel heater more effective
- Special design Inclined heater head is more convenient for X-ray image
- Integral timer to record therapy time
- Bigger mattress,
- Skin temperature trend for 2 hours
- Electric infant bed step-less adjustable tilt $\pm 12^\circ$
- Four transparent protector with two infusion seals
- Convenient X-ray cassette tray under infant bed
- Electric elevator
- LED observation light, oxygen supply system and LED phototherapy
- With RS-232 connector, 2 trays and 2 drawers
- Optional Parts:
low pressure aspirator, internal / external infant resuscitator (T piece), Air and oxygen blender, Gel mattress



INFANT PHOTOTHERAPY UNIT

- LED blue bulbs as the radiant source, irradiating uniformly
- 360° phototherapy radiation more effective
- Small in size, light and high irradiation
- Three phototherapy modes: Up side phototherapy and Down side phototherapy can be used separately, also can be used together
- Therapy time of up and down side phototherapy units, air temperature, skin temperature are displayed separately
- Automatically record each therapy time and total therapy time
- Power off memory, alarm silence key, locking key and self-test function
- Four alarm functions: power failure, probe failure, over temperature, fan failure
- Count down timer
- Two sides observation windows
- Air spring structure make the hood open and close easily
- The aluminum alloy is applied on the base, with 2 drawers and 1 tray



- LED bulbs as phototherapy radiant source
- Irradiance intensity is adjustable in 3 grades: low, medium, high
- LCD screen display therapy time and integral time separately
- Count up timer and count down timer for exact and convenient treatment
- Equal light distribution, high intensity
- Quiet, no noise of fan
- The angle of head and height are adjustable
- Four castor with brake, aluminium alloy and steel support base
- Long life span LED bulbs
- Using together with infant incubators, infant warmers, baby cradle



- Double sides phototherapy for more effective radiation: Upside phototherapy and downside phototherapy can be used separately, also can be used together
- Irradiance intensity of upside phototherapy is adjustable in 3 grades: Low, medium, high
- LCD screen of upside phototherapy unit displays each therapy time and total therapy time with countup and countdown timer
- Upside phototherapy unit adopts big blue LED bulbs, which is, efficient and long life
- Downside phototherapy unit adopts blue LED bulbs source and independent air cooling fan
- Protect boards of infant bed could be folded down for clinical use
- Upside phototherapy unit can be adjusted 360° horizontally and 180° vertically
- The height of upside phototherapy is adjustable
- Stand column could be adjusted $\pm 360^\circ$
- Anti-rusty aluminum alloy base
- With drawers and lockable castors



- LED bulbs as phototherapy radiant source
- Irradiance intensity is adjustable in 3 grades: low, medium, high
- LCD screen display therapy time and integral time separately
- Count up timer and count down timer for exact and convenient treatment
- Equal light distribution, high intensity
- Quiet, no noise of fan
- The angle of head and height are adjustable
- Long life span LED bulbs
- Using together with infant warmers



Multi-parameter Vital Signs Monitor



Standard Parameters



Optional Functions



Multi-parameter Vital Signs Monitor



Standard Parameters



Optional Functions




Multi-parameter Vital Signs Monitor



HM56500

Standard Parameters

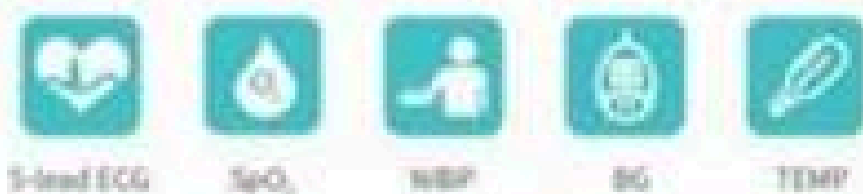

Optional Functions



Multi-parameter Vital Signs Monitor



HM56500

Optional



HM57500

Optional



Standard Parameters

• 12-lead ECG • SpO₂ • NIBP • BG • TEMP • Urine Routine




Optional Functions

• Hemoglobin • Uric Acid • Cholesterol • Laser/Thermal Printer • Lung Function • Fetal heart • Blood Spil • Weight

PM10 Portable ECG Monitor

Features

- ◆ 1.77" color TFT-LCD.
- ◆ Quickly to check ECG once finger touching, convenient to operate.
- ◆ Accurate conclusion can be obtained immediately after measuring.
- ◆ The built-in rechargeable lithium battery can continuously record for up to 500 cases in full charging.
- ◆ Bluetooth transmission.
- ◆ ECG data can be saved to CLOUD Platform permanently, convenient to check and analyze.
- ◆ Historical data can be printed at any time, convenient to diagnose.

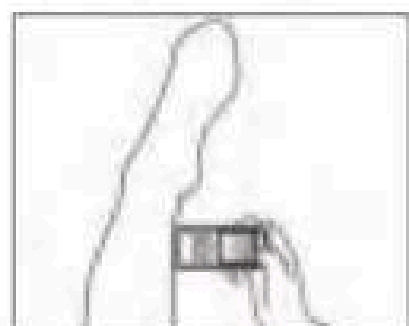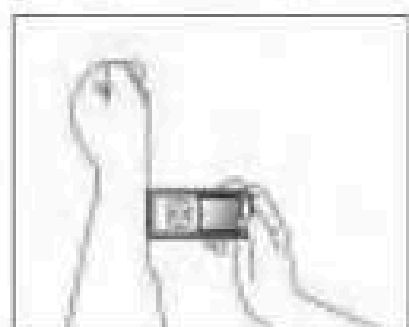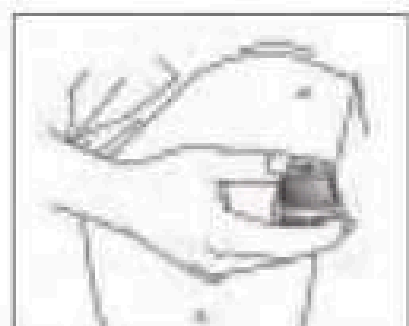

PM10

ECG90A Electrocardiograph

Features

- ◆ 2.83" TFT-LCD
- ◆ Operation mode: touch screen and function keys.
- ◆ Sync collection for 12-lead ECG, display of 3/6/12-lead ECG on one screen.
- ◆ Case storage and review function, and ECG waveforms can be displayed accurately and clearly by communicating with PC.
- ◆ 4h standby time, continuous print up to 90 minutes, record up to 100 ECG waveform.
- ◆ Synchronous print up to 3-lead ECG and analysis report.
- ◆ Power supply: AC/DC, built-in rechargeable lithium battery.
- ◆ Paper speed: 6.25, 12.5, 25, 50 mm/s $\pm$ 5%
- ◆ Multi-language interface.
- ◆ Dimension: 207mm(L) $\times$ 96mm(W) $\times$ 62mm(H)
- ◆ Paper size: 50mm $\times$ 20m



ECG90A

ECG100G Electrocardiograph

Features

- ◆ 2.8" LCD
- ◆ Continuous record for single-channel ECG waveform and annotation.
- ◆ Power supply: AC/DC, built-in rechargeable lithium battery.
- ◆ In AUTO mode, finish recording by pressing the button once, which improves work efficiency.
- ◆ Adopt digital signal processing technology and get high-quality ECG waveform via power frequency filter, baseline filter and EMG filter of ECG signal.
- ◆ Real-time and continuously record clear and accurate ECG waveform and annotation character (including lead mark, sensitivity, paper speed and filter state, etc.).
- ◆ Adopt high-resolution thermal printing system (8 dot/mm), no need for any adjustments. Recording frequency: up to 150Hz.
- ◆ Multi-language (Chinese, English, French, Italian, German, Spanish, Turkish, Russian and Kazakh) interface and report.
- ◆ In optimal DC state, up to 7-hour standby time, continuous print up to 4-hour, record up to 150 pieces of ECG waveform.
- ◆ Paper size: 50 mm(W) $\times$ 20 m(L)
- ◆ Dimension: 315 mm(L) $\times$ 215mm (W) $\times$ 77 mm(H)



ECG300GA/E3M Electrocardiograph

Features

- 2.8" LCD
- High-resolution thermal printer achieves real-time print of ECG waveform and report.
- Power supply: AC/DC, built-in rechargeable lithium battery.
- Paper speed: 6.25, 12.5, 25, 50 mm/s $\pm 5\%$
- Paper size: 80 mm(W) $\times$ 20 m(L)
- Dimension: 315 mm(L) $\times$ 215 mm (W) $\times$ 77 mm(H)
- Sync collection for 12-lead ECG, adopt digital signal processing technology and get high-quality ECG waveform via power frequency filter, baseline filter and EMG filter of ECG signal.
- Display of 1/3/6/12-lead ECG, print mode, sensitivity, paper speed and filter state, etc. on one screen, convenient for contrastively diagnosing.
- Multiply printing modes and formats, including manual, auto 4x3, auto 3x4+1, auto 3x4, auto 2x6+1, auto 2x6, etc. Waveform length printed can be adjusted, and with timed print function, which meets different requirements.
- With the functions of auto-analysis and auto-diagnosis for routine ECG parameters, provide measurement results and auto-diagnosis conclusion for HR, P-R interval, P Duration, QRS Duration, Q-T interval, Q-Tc, P Axis, QRS Axis, T Axis, R(V5), S(V1), R(V5)+S(V1), etc. which reduces the doctor's burden.
- Build-in memory stores 15 cases, which is convenient for doctor to review case and statistic.
- Multi-language (Chinese, English) interface and report.
- Optional ECG-Sync software, connect with PC by USB2.0 interface to form a ECG workstation, import real-time data to the software for analyzing and report printing, and old cases stored in Electrocardiograph can be uploaded to PC.



ECG300G/ECG300GT/E3 Electrocardiograph

Features

- 4.3" LCD
- High resolution thermal-array output system (8 dots/mm), no adjustment required. Frequency Response is up to 150Hz.
- Sync collection for 12-lead ECG, support routine 12-lead and Cabrera-lead waveform display. Get high-quality ECG waveform via AC filter, DFT filter, EMG filter and Low-pass Filter of ECG signal.
- Display 3/6/12-lead ECG waveform, print mode, sensitivity, paper speed, filter status, etc. on one screen, convenient for contrastively diagnosing.
- Support for auto 1 $\times$ 12, auto 1 $\times$ 12+1, auto 2 $\times$ 6, auto 2 $\times$ 6+1, auto 3 $\times$ 4, auto 3 $\times$ 4+1, auto 4 $\times$ 3, auto 3-2+1, auto 3-2, rhythm 4, rhythm 3, rhythm 2 and manual. The printed content contains time, paper speed, sensitivity, calibration signal, name of lead, filter state and patient's information. Information including printed waveform length, output measurement parameter, diagnostic conclusion, superposition QRS waveform, histogram, trend chart and interval list, can be set, and with time print function, which meets different requirements.
- With the functions of auto-measurement and auto-interpretation for routine ECG parameters, provide measurement results for HR, PR interval, P Duration, QRS Duration, T Duration, QT/QTc interval, P/QRS/T Axis, R(V5), S(V1) and R(V5)+S(V1), etc. and auto-diagnosis conclusion, which reduces the doctor's burden.
- Rhythm lead can be selected freely, convenient to observe abnormal heart rhythm.
- The subject's clinical information (such as, ID, Name, Age, Sex, Height, Weight, etc.) can be entered.
- 1000 cases can be stored by the built-in memory, convenient for case review and statistic.



ECG600G/E6 Electrocardiograph

Features

- ◆ Adopt 7" high-resolution color LCD, operate by touch screen and function buttons, convenient to use.
- ◆ Sync collection for 12-lead ECG, support routine 12-lead and Cabrera-lead waveform display. Get high-quality ECG waveform via AC filter, DFT filter, EMG filter and Low-pass Filter of ECG signal.
- ◆ Display 3/5/12-lead ECG waveform, print mode, sensitivity, paper speed, filter status, etc. on one screen, convenient for contrastively diagnosing.
- ◆ Power supply: AC/DC (which can adapt AC 50/60Hz), with built-in rechargeable lithium battery, charging circuit, perfect over-current and over-voltage protection circuit.
- ◆ Rhythm lead can be selected freely, convenient to observe abnormal heart rhythm.
- ◆ The subject's clinical information (such as, ID, Name, Age, Sex, Height, Weight, etc.) can be entered.
- ◆ 1000 cases (3-s case is frequently used) can be stored by the built-in memory, convenient for case review and statistic.
- ◆ In optimal DC state, up to 10-hour standby time, continuous print for more than 3-hour and print up to 1000 ECG waveform (3-s case is frequently used).
- ◆ Multi-language (Chinese, English, Turkish, Portuguese, German, Russian and Kazakh, etc.) interface and report.
- ◆ External printer and USB storage device can be connected.



ECG600G



E6

E6

Wider in input dynamic range, higher in CMRR and polarizing voltage.

ECG1200G Electrocardiograph

Features

- ◆ 8" color touch-screen.
- ◆ Sync collection for 12-lead ECG, a sampling accuracy of 24-bit can get high-quality ECG waveform via power frequency filter, baseline filter and EMG filter of ECG signal.
- ◆ 3/5/12-lead ECG waveform and other information such as print mode, sensitivity, paper speed, filter can be displayed in one screen, convenient for contrastive diagnosis.
- ◆ Multiply printing modes and formats, including auto 12x1, auto 6x2+1 (rhythm lead), auto 6x2, auto 3x4+2 (rhythm lead), rhythm 12, rhythm 10, rhythm 8, rhythm 6, manual, etc. Trend chart and histogram of P-R interval can be printed, waveform length printed can be adjusted, and with time print function, which meets different requirements.
- ◆ Paper speed: 5mm/s, 6.25mm/s, 10mm/s, 12.5mm/s, 25mm/s, 50mm/s.
- ◆ With the functions of auto-analysis and auto-diagnosis for routine ECG parameters, provide measurement results and auto-diagnosis conclusion for HR, P-R interval, P Duration, QRS Duration, Q-T interval, Q-Tc, P Axis, QRS Axis, T Axis, R(V5), S(V1), R(V5)+S(V1), etc., which reduces the doctor's burden.
- ◆ Built-in large capacity memory, convenient for case review and statistic.
- ◆ Multi-language (Chinese, English, Turkish, Portuguese, German, Russian, Kazakh and other languages) interface and report.
- ◆ In optimal DC state, up to 10-hour standby time, continuous print more than 3-hour, which meets the requirements of visiting a patient at home and body examination.



ECG1200G

Baby Sound A/Baby Sound B Pocket Fetal Doppler

Features

- ◆ Integrated design for probe and host.
- ◆ Double headphone jacks.
- ◆ High-sensitivity ultrasound probe.
- ◆ Screen will be locked automatically when there is no signal for 15s, convenient to observe (only for Baby Sound B).
- ◆ Power supply: two 1.5V batteries (AAA LR03).



Baby Sound A

Baby Sound B

Baby Sound C/Baby Sound C1 Pocket Fetal Doppler

Features

- ◆ Bar graph and heartbeat waveform color display (only for Baby Sound C1).
- ◆ Three working mode: Real-time FHR Display Mode, Averaged FHR Display Mode and Manual Mode.
- ◆ Pluggable USB probe interface, probe can be replaced.
- ◆ Auto shut off if there is no signal within 1 minute.
- ◆ Power supply: two 1.5V batteries (AA LR6).
- ◆ Optional probes: 2MHz, 3MHz, 8MHz probe.
- ◆ Built-in speaker.
- ◆ Battery status indication.



CONTEC10A/CONTEC10B Pocket Fetal Doppler

Features

- ◆ Magnetic probe.
- ◆ Digits/Curve display.
- ◆ Battery level indication.
- ◆ Auto shutdown after no signal inputting for 60s.
- ◆ Two sound output modes: built-in speaker and external headphone.
- ◆ Power supply: two 1.5V batteries (AA LR6).
- ◆ Probe working frequency: 2 MHz(CONTEC10B)/3 MHz (CONTEC10A).




CONTEC10A

CONTEC10B

CONTEC10C/CONTEC10CL Pocket Fetal Doppler

Features

- ◆ Magnetic probe, compact design, convenient to use.
- ◆ Digits/Curve display.
- ◆ Battery level indication.
- ◆ Auto shutdown after no signal inputting for 60s.
- ◆ Two sound output modes: built-in speaker and external headphone.
- ◆ Enclosure protection class IP22.
- ◆ CONTEC10C Battery type: three 1.5V batteries (AA LR6).
- ◆ CONTEC10CL Battery type: 3.7V lithium battery.
- ◆ Probe working frequency: 2 MHz(CONTEC10C)/3 MHz (CONTEC10CL).

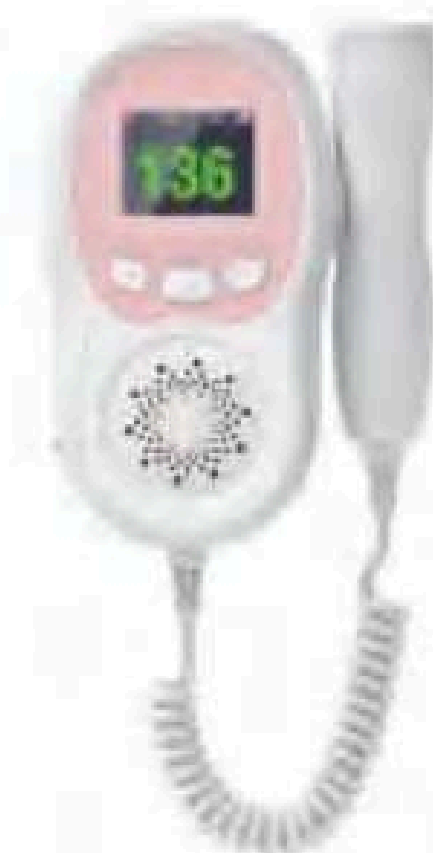


CMS1700A/B/C Color Doppler Ultrasonic Diagnostic System

Features

- ◆ 15 Inch TFT Display
- ◆ Advanced Technologies
- ◆ Digital Beam Forming (DBF)
- ◆ Real-time Dynamic Aperture (RDA)
- ◆ Dynamic Receiving Focus (DRF)
- ◆ Tissue Harmonic Imaging (THI)
- ◆ Continuous Doppler (CW)
- ◆ Superior Phased Array
- ◆ Cardiac Imaging Technology
- ◆ Complete Software Package
- ◆ PW Auto Trace
- ◆ Trapezoid Imaging
- ◆ Compound Imaging
- ◆ B+CF/PDI/DPDI+PW
- ◆ Full-Screen Display
- ◆ Display Mode
- ◆ B, B/B, 4B, PDI, 3D, 4D, M, CF, PW, CW
(Optional: 3D, 4D)



CMS1700A/B/C

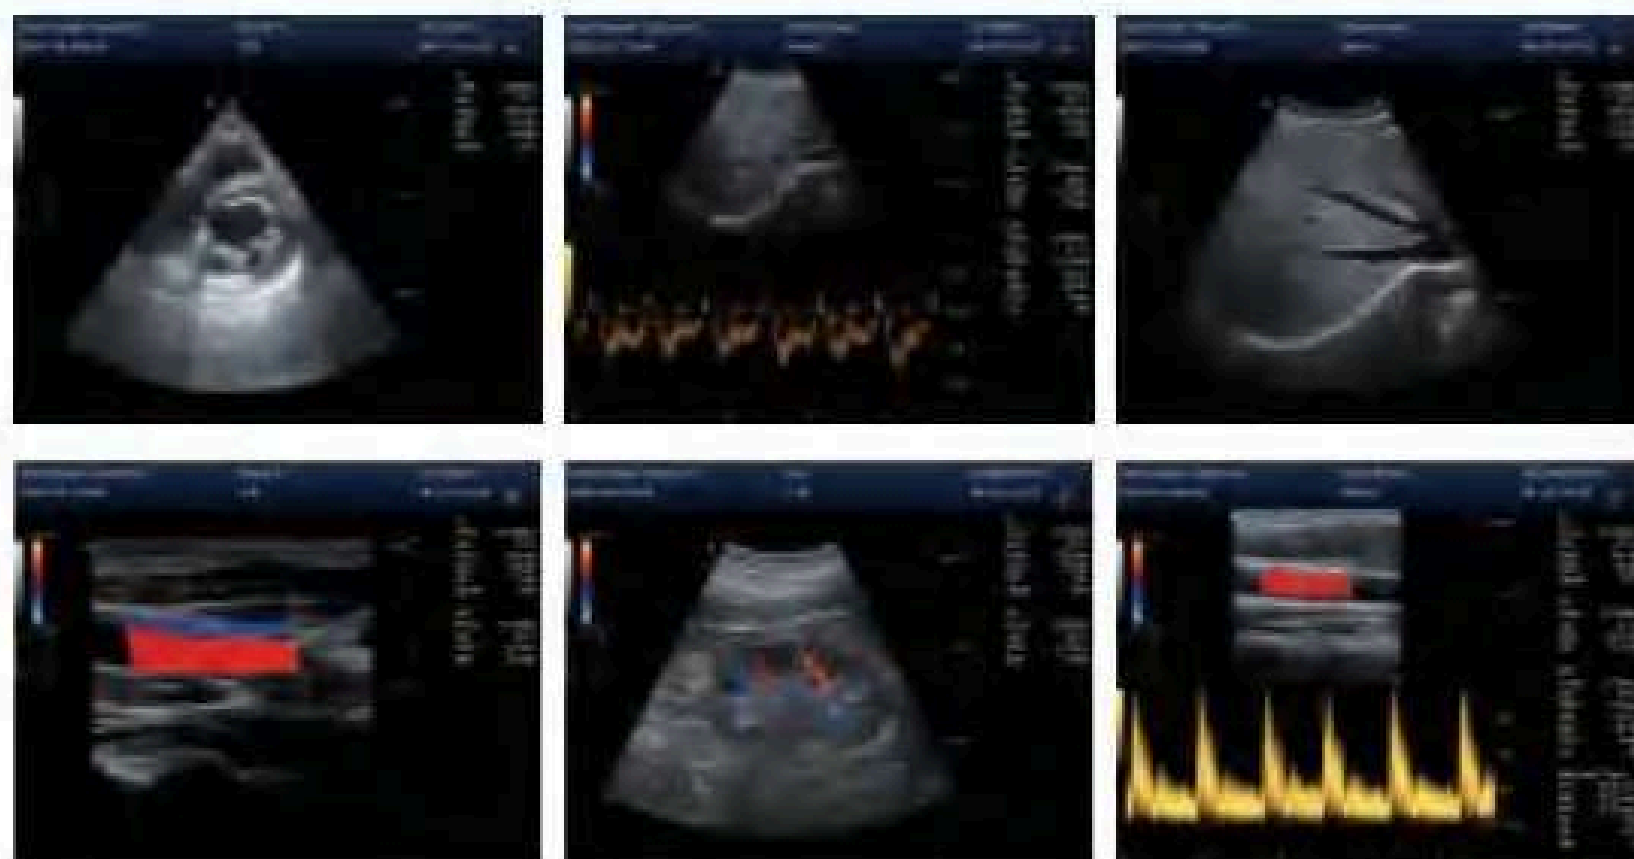

CMS600P2 B-Ultrasound Diagnostic System

Features

- ◆ 10" LCD.
- ◆ Laptop device with embedded operating system, rich in software packages.
- ◆ Be applicable for examination of abdomen, gynecology and obstetrics, cardiology, small organs and urology.
- ◆ Adopt tissue harmonic imaging (THI) technology, reports can be printed and exported.
- ◆ Near gain, far gain and total gain can be set separately.
- ◆ Images can be stored in the device or U disk. Be compatible with ink jet printer, laser printer and video printer.
- ◆ Optional probes: 3.5MHz convex probe, 3.5MHz micro-convex probe, 6.5MHz transvaginal probe, 7.5MHz linear probe.
- ◆ Dimension: 292mm(L) × 232mm(W) × 45mm(H)



MS400 Multiparameter Simulator

MS400 is a portable Multiparameter Simulator which can accurately simulate 12-lead ECG, respiration, temperature, 2-channel IBP or 4-channel IBP.

Features

- ◆ Simulate 35 kinds of arrhythmia and pacemaker waveforms.
- ◆ Simulate 4-channel IBP data.
- ◆ Simulate respiration signal with adjustable respiration rate, impedance change and baseline impedance, and 3 kinds of apnea data.
- ◆ Simulate 4 kinds of temperature data.
- ◆ Simulate square wave, triangle wave, pulse wave and sine wave with adjustable frequency.
- ◆ Simulate standard ECG calibration, adult and pediatric ECG signal.
- ◆ ECG waveform complied with the standard of ANSI/AAMI EC13-2002, AHA, MIT.
- ◆ ECG database, other ECG database and user-defined waveform data stored in TF card can be displayed by the simulator and exported to the equipment to be tested.
- ◆ Each waveform can be observed by sliding the 3.5" color TFT touch screen, easy to operate.
- ◆ Power supply: rechargeable lithium battery or linear adapter.
- ◆ Operation mode: keys and touch screen.
- ◆ Dimension: 188.6mm(L) × 125mm(W) × 43.2mm(H)



MS500 Universal Multiparameter Simulator

Features

- ◆ Support the inspection procedure of standards performance requirement of all versions for the Electrocardiograph, Electrocardiographic monitors, Dynamic Electrocardiograph and Electroencephalogram Mapping.
- ◆ Output of function signals: sine wave, square wave, triangular wave, pulse wave and DC signals, etc., amplitude and frequency is adjustable.
- ◆ Output of various types of medical signals: normal ECG wave, multiple abnormal ECG waves, RESP wave, EEG wave, etc. HR, wave group parameters, period and amplitude are adjustable.
- ◆ Testing and calibration of 18-lead ECG equipment.
- ◆ Output of waveform signals, including normal sinus rhythm, irregular heart-beat, body temperature and IBP.
- ◆ Create/Edit/Delete any test signal under operation interface, record and save the superposed signal as needed.



MS500

MS900 Vital Signs Simulator

Features

- ◆ Simulate many physiological parameters.
- ◆ Corresponding waveform signal can be output according to the requirements of relative standards, and the test items in relative standards can be extended.
- ◆ High-resolution 7" color LCD, operate by touch screen and functional buttons, convenient and fast to operate.
- ◆ AC/DC (frequency: 50/60 Hz), built-in rechargeable lithium battery and charging circuit.
- ◆ User-defined test solution which can be saved, achieves flexible configurations among solutions.
- ◆ Dimension: 380 mm(L) × 260 mm (W) × 160 mm(H)



MS100 SpO₂ Simulator

MS100 is a separated SpO₂ simulator which features in small volume and light weight. As different manufacturers may use different R-curve, parts of current popular R-curve are embedded into the simulator in advance.

Features

- ◆ Separated design for simulator probe and host, convenient to test and operate.
- ◆ SpO₂ simulation.
- ◆ Pulse rate simulation.
- ◆ Simulate presettable patient state.
- ◆ Test reaction time of the device.
- ◆ TFT-LCD with adjustable backlight brightness.
- ◆ Film button, more comfortable to operate.
- ◆ With rechargeable lithium battery.
- ◆ Simulate SpO₂ and PR under different amplitudes.
- ◆ Test device performance under different interference source.
- ◆ Dimension: 189mm(L) × 125mm(W) × 56 mm(H)



MS100

MS200 NIBP Simulator

MS200 NIBP Simulator is a multi-purpose test instrument for checking oscillometric Non-Invasive Blood Pressure(NIBP) Monitors, features in compact appearance, simply operation, and the internal pump can generate pressures up to 400mmHg (53.3kPa).

Features

- ◆ Test functions for pressure gauge, pressure leak and relief valve.
- ◆ Build-in pump provides pressure source.
- ◆ Simulate ambulatory blood pressure for arm and wrist Sphygmomanometer.
- ◆ Simulate blood pressure for adult, neonate, 8 kinds of patient state and user-defined.
- ◆ Simulate blood pressure under the condition of arrhythmias, respiratory interference.
- ◆ 4.3" LCD
- ◆ Built-in air chamber to simulate adult and neonate cuff.
- ◆ Dimension: 270mm(L) × 265mm(W) × 132mm(H)



MS200

CONTEC08D Electronic Sphygmomanometer

Features

- ◆ 7-segment LCD.
- ◆ Be applicable for adult.
- ◆ Start measuring manually store up to 99 groups of data.
- ◆ Low battery and error information indication.
- ◆ Automatic power-off when there is no operation for several minutes.
- ◆ Optional units: mmHg and kPa.
- ◆ Memory for blood pressure results.
- ◆ Dimension: 132mm(L) × 130mm(W) × 50mm(H).



CONTEC08D

CONTEC07A Electronic Sphygmomanometer

Features

- ◆ Be applicable for use by adult for NIBP measurement.
- ◆ One-button operation, wrap the cuff automatically to finish measurement.
- ◆ High-definition color LCD, big font display, simple and understandable in display contents.
- ◆ Measurement results can be printed, convenient for user to record.
- ◆ Be applicable for use by person whose arm circumference is in range of 17 cm ~ 42 cm.
- ◆ Optional two units: mmHg and kPa.
- ◆ USB interface and network interface.



AE1000A Arteriosclerosis

Specification

ECG

Calibration voltage: 1 mv $\pm$ 5 %

Amplitude-frequency characteristic: 10 Hz as standard, 1 Hz~75 Hz

Noise level: $\leq$ 30 μ Vp-p

CMRR: $\geq$ 60 dB

HR: 30 bpm ~ 300 bpm, accuracy : $\pm$ 1 bpm or $\pm$ 1 %, whichever is greater.

HS

Amplitude-frequency characteristic: the difference of sinusoidal waveform with input frequency 20 Hz~250 Hz and the one with input frequency 100 Hz: $\leq$ 10 %.

NIBP

- ◆ Measurement method: oscilloscope (single limb, unilateral, four-limb synchronous measurement)
 - ◆ Measurement range: 0 mmHg~290 mmHg(0~38.6 kPa)
 - ◆ Resolution: 1mmHg(0.133 kPa)
- Accuracy meets the requirements of standard deviation and mean deviation in ANSI/AAMI SP-10.



CMS6600B EMG/EP System

Features

- ◆ Professional EMG/EP operation platform and perfect test projects, complete each test in the shortest time.
- ◆ Perfect case report data and graph creating system.
- ◆ Special database management system.
- ◆ Select test part with Neuro and muscle navigation system and projects selecting system fleetly and conveniently.
- ◆ Powerful normal value system, contrast with normal data automatically.
- ◆ Flexible software design, configure systems according to requirements.
- ◆ High-speed data collection, electromagnetic interference suppression, Photoelectric isolation and low noise.
- ◆ Simple and convenient operation panel.
- ◆ Good Electrostatic and electromagnetic interference suppression capability for using high strength and light quality metal enclosure.
- ◆ Selectable 1-4channel input mode meets multi-working modes in clinical EMG test.
- ◆ High-speed collect and process data with parallel processing technology, display data with graph.



KT88/KT88-2400/KT88-3200 Digital Brain Electric Activity Mapping

The Digital Brain Electric Activity Mapping collects EEG signal by electrodes, via auto-analysis and FFT, to form electroencephalogram. They are applicable for checking such diseases as epilepsy, intracranial inflammation, cerebrovascular diseases and brain tumors.

Features

- ◆ Channels:
KT88 : 16-channel EEG + 2-channel ECG(optional)
KT88-2400 : 19-channel EEG+5-channel multi-parameter (including 1-channel ECG + 1-channel EMG+ 2-channel EOG + 1-channel respiration)(optional)
KT88-3200 : 32-channel EEG
- ◆ Display speed(paper speed): 5, 10, 15, 30, 60, 120 mm/s, gain: 1, 1.5, 2, 3, 5, 7.5, 10, 12, 15, 20, 30, 50mm/50μV, Playback speed: 1, 2, 3, 10, 20, 40, 60 times.
- ◆ Multifunctional digital filter systems, user can freely set low-pass, high-pass, band pass and band stop filter.
- ◆ Electronic frequency ruler with partial magnification window, to accurately measure EEG cycle, amplitude and frequency, and which can be adjusted according to requirements.
- ◆ User-defined events can be added, waveform color for evoked event can also be freely set, ensures that the waveform in corresponding time can be rapidly found by event name during case playback.
- ◆ Powerful and automatic analysis function, display of many charts(Including kinds of BEAM, numerical BEAM, compressed spectrum chart, trend chart, etc.) on one screen.
- ◆ Multifunctional flash stimulator with USB interface, which can control flashlight manually or automatically. A flashlight stimulation scheme can be set and performed in the process of collection.
- ◆ Perfect case management function, provides many means for research and fast statistic information, which is convenient for exporting and importing cases.
- ◆ Integrative image and character report, report mode can be edited and switched to Word document.
- ◆ With the functions of converting case files into EDF and BDF data format, which is convenient for data interchange and academic exchange.
- ◆ System parameters and display modes can be set according to requirements.
- ◆ Marks and annotations can be added to the waveform designated, which can rapidly find the waveform in that time by marks.
- ◆ Optional functions: video, SpO₂.



KT88




KT88-2400



KT88-3200



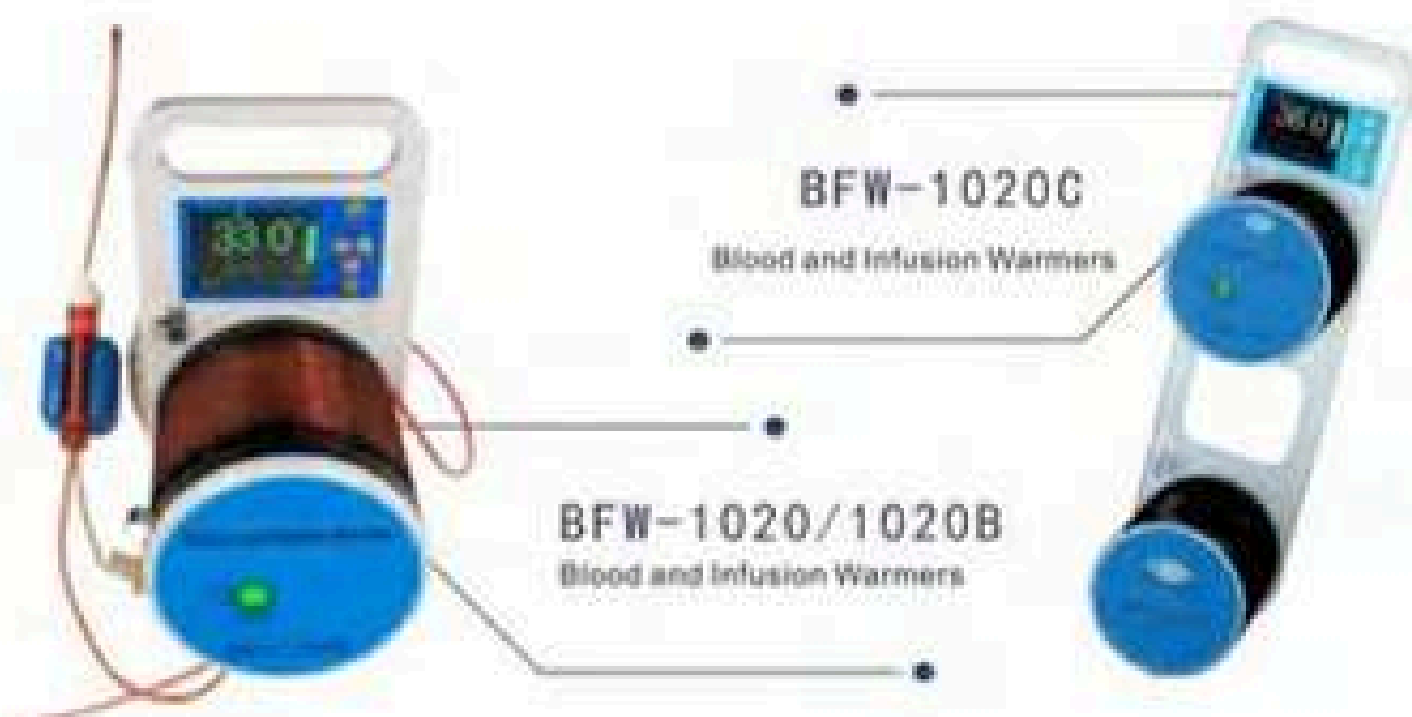


Application

Infusion & Blood Warmer is suitable for operation room, ICU, emergency room, ward or other places. When the instrument works, the heat passes through the heat exchanger to the flowing liquid in the groove, and the blood, blood products, liquid medicine, nutrient solution or flushing liquid are heated to ideal temperature under the condition of cold storage or room temperature, which can prevent the low temperature syndrome and the related complications.

Features


- High efficiency: adapt to the change of liquid velocity, temperature and environment, intelligent microcomputer can control the temperature automatically, the heating capacity can reach 9 liters / hour, and it can heat multi-channel isothermal liquid at the same time. (BFW-1020C heating capacity is 15 liters / hour) unique drop speed / room temperature / wireless connection function design, through wireless function can transfer data to the central monitoring system (BFW-1020B configuration);
- Flexible: suitable for large flow infusion and transfusion, can also be used for general transfusion, heating temperature range is set at 28-41 degrees Celsius; (0.1 increments)
- Clear: use 3.2 inch color LCD display, synchronous display: real time temperature, setting temperature, heating time, alarm indicator, room temperature, drop speed, whether there is no city power instructions, whether there is liquid indication, whether there is communication instructions;
- Fast: 2 minutes to set the temperature, 24 hours of continuous work;
- Economy: disposable pipeline low price; (large flow blood transfusion using special tube)
- Innovation: no electricity alarm after power out;

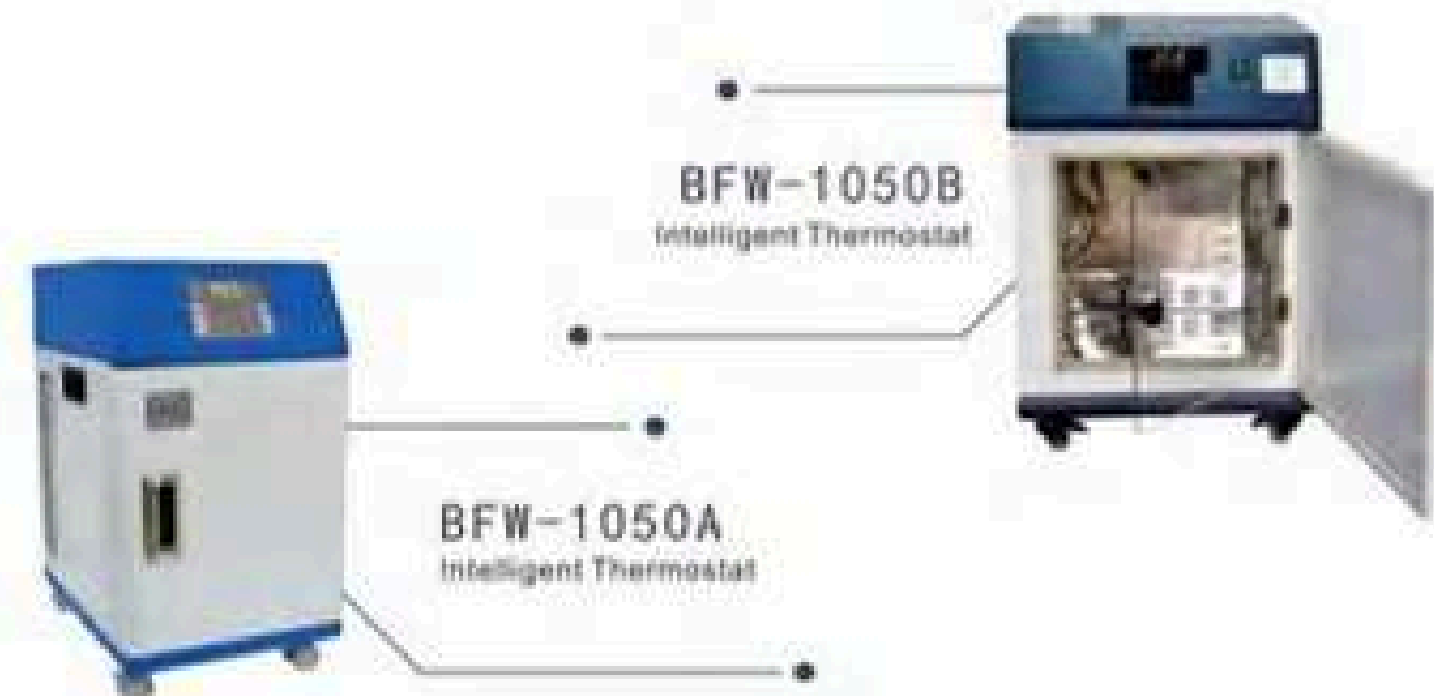


Application

Products applicable to the industry. The health care industry, drug control, environmental protection, chemical industry, laboratory, food, health and epidemic prevention departments for drugs, reagents, vaccines and other products stored in imported computer monitoring, temperature controller, color display, high precision, high and low temperature alarm, temperature sensor fault alarm, to prevent accidents.

Features



Working interface



Set interface

- 32 bit high speed microprocessor, the temperature control accuracy can reach $\pm 0.5^{\circ}\text{C}$; controllable temperature value is between 5°C and 65°C ;
- True color touch screen, large screen display, with the screen synchronous display of data transmission, timer and temperature change;
- According to the heating step, the temperature is monitored in real time, and 16 monitors are synchronized and monitored in real time;
- User-friendly user panel, easy to identify, easy to operate;
- Built in toughened glass door provides good air tightness and easy to observe the working condition of the machine;
- Provide a variety of modes of work, adapt to a variety of environments;
- Three temperature protection, temperature cut-off function, leakage and current excessive circuit breaker;
- The silent heating motor makes the temperature distribution of the inner cavity of the instrument uniform, and the racking function is built-in to improve the heating efficiency;
- BFW-1050A capacity: 10 liters, maximum heating power: 300W
- BFW-1050B capacity: 30 liters, maximum heating power: 500W
- BFW-1050C capacity: 50 liters, maximum heating power: 700W



BVF-263
Vein Finder

Application

Assist paramedics in the venous puncture, rapid and accurate venous search and positioning, especially for children, obesity, edema, hirsutism and other vascular positioning difficulties of patients with a significant role. It can help improve the success rate of venous puncture, reduce the patient's pain and improve the doctor-patient relationship.

Features



- Compact and lightweight, can be mastered by one hand, easy to carry;
- Use without bracket, free from environmental restrictions;
- With blue and white, red and green two imaging modes, one-button free to switch;
- Image performance optimization, brightness adjustable;
- Use medical cold light irradiation, safety does not hurt the eye;
- Touch mode dormancy, safe and save electricity;
- The exterior design is more reasonable, image is clearer, grip more comfortable;
- The light source brightness adjustment range is wide, suitable for a wide range of people.



BD-330
Syringe Destroyer


Application

By melting the needle at a low pressure moment, can be used to prevent the repeated use of syringe destroy the disposable syringe and prevent cross infection. Suitable for dental oral syringe special needles or other similar needles (insulin injection needles, acupuncture needles and disposable skin test needles).

Features



- It has the function of damaging needle (30g-34g), automatic disassembly of the needle, ozone disinfection (optional) and pre-heating of liquid medicine (optional);
- Safe: High quality durable electrode, low voltage melt needles instantly, double overheat protection;
- Fast: three steps to complete destruction of both ends of the anesthetic needle. The needle can be removed by rotating automatically;
- Health: instantaneous vaporization residual liquid in the re-needle, ozone disinfection, special waste collection bin (in accordance with Regulations on the management of medical waste requirements);
- Conveniently: disposable waste collection bin, Easy disassembly, uniform treatment to prevent secondary pollution;
- Humanity: Professional anesthetic pre-heating device, greatly alleviate the suffering of patients;
- Consumables: waste residue collecting barrels.

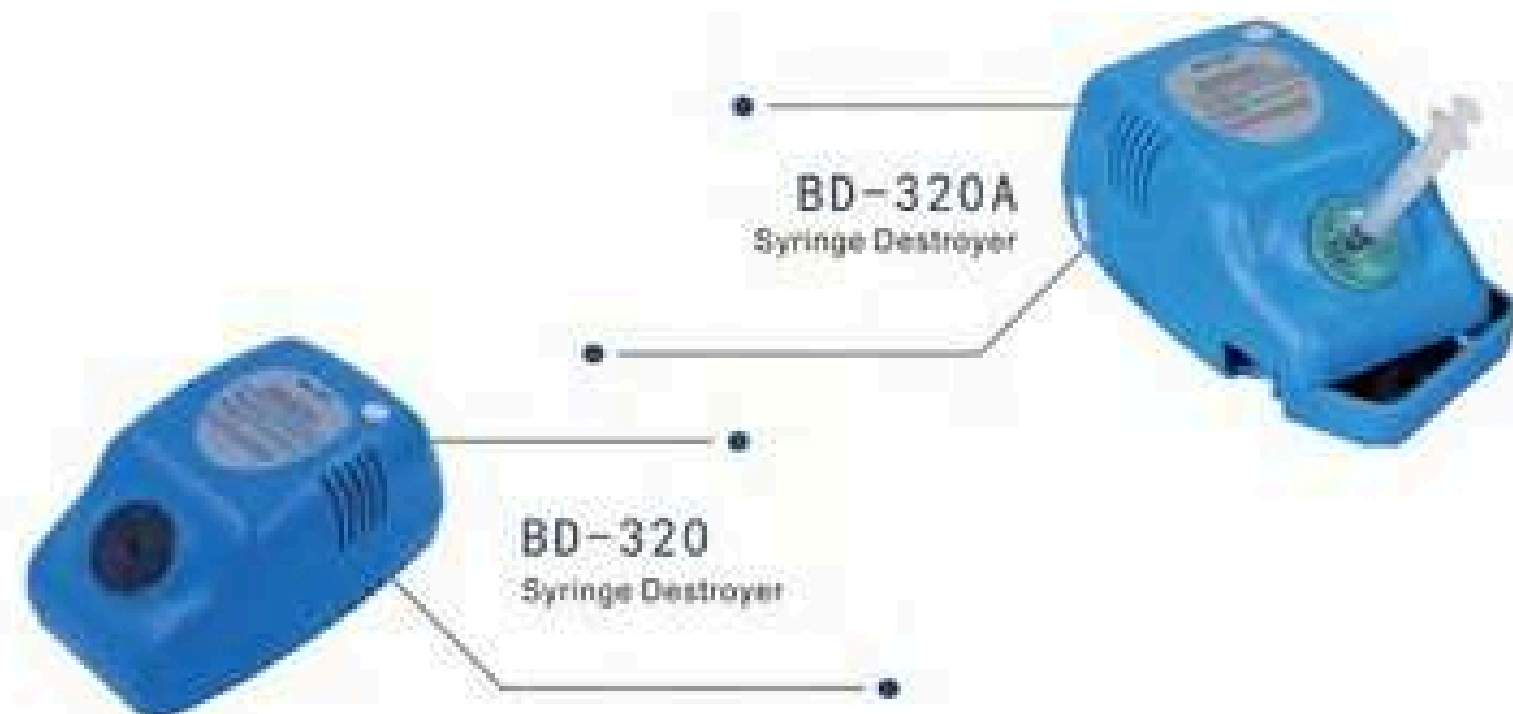

Application

By melting the needle at a low pressure moment, can be used to prevent the repeated use of syringe, destroy the disposable syringe and prevent cross infection.

Features



- Can melt the acupuncture thin needle, the speed is fast and the spark is small;
- In the process of melting needle, it has double over-heating protection function;
- The machine is light weight, easy to operate, easy maintenance;
- Work status instructions clear;
- The remaining liquid in the syringe can be boiled immediately without any contamination;
- During the melting process, the indicator light is sparking, indicating that the pointer is being destroyed, and the whole process is completed within 1 to 3 seconds;



Application

By melting the needle at a low pressure moment, can be used to prevent the repeated use of syringe, destroy the disposable syringe and prevent cross infection.

Features



infusion tube cutter

- Low pressure instantly melt syringe needles
- High-quality silver alloy electrode, no oxidation;
- Double overheat protective measures are provided for the fuse, safe and secure;
- The machine is light weight, easy to operate, easy to replace the blade, easy maintenance;
- Work status instructions clear;
- The machine has fireproof cover;
- Residual liquid in the needle is instantly vaporized, debris has slag box loading;
- After injection, the needle is directly inserted into the hole to melt, and the syringe can be damaged by downward pressure;
- It has alarm prompts and ozone disinfection function when waste residue box is full;
- Can cut off the syringe needle and needle joints, cut off the infusion tube
- Melt the needle, damage the needle tube, built-in rechargeable battery.



BIC-30
Insulin Refrigerator

Application

The insulin-refrigerator is developed specifically for the low temperature storage requirements of insulin or some drugs. The device makes the insulin and other drugs storage environment temperature control at 2-8 °C through the refrigeration unit and sealed environment. Using built-in high capacity lithium battery and external mobile can achieve long standby power supply.

Features



- Simple operation and precise temperature control;
- Large HD color LCD display, intelligent display and control system;
- Under the environment temperature is 25 °C, to keep temperature inside the box 2-8 °C;
- Light and delicate, super long standby;
- Appearance beautiful and generous, palm size is easy to carry the built-in battery and external battery can guarantee the continuous working time of the refrigerator box for about 10 hours.
- LED lighting and magnifying glass function
- Unique LED highlighting function, convenient night lighting, magnifying glass greatly facilitate the elderly to see the text on drugs;
- Using semiconductor refrigeration technology, fluorine-free environmental protection, stable work, long service life, low temperature anti-freezing function;
- Dimensions: 190mm*82mm*80mm
- Space capacity: 0.15L;
- Weight: 0.8Kg.



BFP-10
Feeding Pumps

Application

Suitable for patients who needs external feeding, hospitalized and non-hospitalized patients both can use this product for external feeding. This product is used to provide additional power while feeding intestinal nutrient solution to human, can control the feed, ensure the orientation of intestinal nutrient solution in the infusion tube and feeding tube at a fixed speed flows into the body of the stomach or intestines. It is beneficial to the absorption and utilization of intestinal nutrient solution for patient.

Features



- Microcomputer control, accurate and reliable, Automatic alarm, safe and reliable;
- Human-computer interaction interface friendly, panel light touch key, step by step tips, easy to guide procedures and operations;
- Tubing can quickly connect with bottled or bagged sets;
- A variety of sensor technology that can detect the state of the upstream and downstream flows;
- Automatic perfusion function;
- AC and DC power supply;
- Unique design of the bottom section cup make the machine firmly adsorbed on the table, prevent touch cause subversion during operation and placement;
- Preheating function of nutrient solution (optional);
- Flow rate setting range: 1-400ml / hr increment: 1ml / hr;
- Flow Rate Accuracy: 10% of the selected flow rate or 0.5 ml / hr, whichever is greater; infusion total volume range: 1-3880ml 1-1000ml each time 1-99 times 1-20 hours intervals; rinse 10-50ml interval 1-25h.



Application

Obstetric detector can measure fetal heart rate, blood oxygen, blood pressure, convenience easy to operate, print results in real time.

Features



Obstetric Detector

- Fetal heart rate, blood oxygen and blood pressure were measured completely at one-time;
- Clearly shows fetal heart rate, blood pressure, oxygen and other parameters;
- Real-time printing of test data;
- Easy operation, convenient and intuitive working status;
- High quality loudspeaker with clear and sonorous sound;
- The built-in rechargeable battery can work for 3 hours continuously;

Vital Signs Monitor

- Body temperature, oxygen, blood pressure;
- Equipped with printer, real-time printing parameters;
- Highlighted clear color LCD display body temperature, blood pressure, oxygen and other parameters
- Modular design, which facilitates system hardware and software upgrade and expansion, can be connected to the computer;
- Man-machine dialogue interface, easy to operate, convenient, intuitive work status;
- The built-in rechargeable battery can work for 3 hours continuously.



BVF-262
Breast Self Check Mammography Apparatus

Application

The breast Awareness Apparatus BVF-262 take the Specific wavelength near infrared as the source to penetrate the breast. Different tissues of body absorb infrared light differently, For example, abnormal tissue absorbs infrared light preferentially while tissue in good condition absorbing less infrared light. The health condition of the breast can be examined by the images.

Features



- Breast tissues are clearly imaged under the fluorescence of red light;
- Compact and lightweight, ergonomic design;
- Dual inductive touch switch prevents glare;
- LED array, strong light source;
- Infinite touch brightness adjustment;
- Built-in rechargeable battery for easy use;
- Dimension (L*W*H): 201mm*38mm*50mm;
- Luminous power: 18W;
- Near-infrared wavelength: 825-830nm±5%;
- Power adapter input/output voltage: Input 100V-240V, Output DC 12V.



Application

Obstetric detector can measure fetal heart rate, blood oxygen, blood pressure, convenience easy to operate, print results in real time.

Features



Obstetric Detector

- Fetal heart rate, blood oxygen and blood pressure were measured completely at one-time;
- Clearly shows fetal heart rate, blood pressure, oxygen and other parameters;
- Real-time printing of test data;
- Easy operation, convenient and intuitive working status;
- High quality loudspeaker with clear and sonorous sound;
- The built-in rechargeable battery can work for 3 hours continuously;

Vital Signs Monitor

- Body temperature, oxygen, blood pressure;
- Equipped with printer, real-time printing parameters;
- Highlighted clear color LCD display body temperature, blood pressure, oxygen and other parameters
- Modular design, which facilitates system hardware and software upgrade and expansion, can be connected to the computer;
- Man-machine dialogue interface, easy to operate, convenient, intuitive work status;
- The built-in rechargeable battery can work for 3 hours continuously.




BVF-262
Breast Self Check Mammography Apparatus

Application

The breast Awareness Apparatus BVF-262 take the Specific wavelength near infrared as the source to penetrate the breast. Different tissues of body absorb infrared light differently, For example, abnormal tissue absorbs infrared light preferentially while tissue in good condition absorbing less infrared light. The health condition of the breast can be examined by the images.

Features

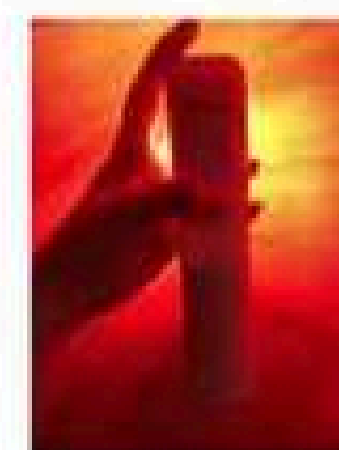

- Breast tissues are clearly imaged under the fluorescence of red light;
- Compact and lightweight, ergonomic design;
- Dual inductive touch switch prevents glare;
- LED array, strong light source;
- Infinite touch brightness adjustment;
- Built-in rechargeable battery for easy use;
- Dimensions(L*W*H): 201mm*38mm*50mm;
- Luminous power: 18W;
- Near-infrared wavelength: 825-830nm±5%;
- Power adapter input/output voltage: Input 100V-240V, Output DC 12V.



Technical Data

MODEL	LS-60SV	LS-80SV	LS-100SV	LS-120SV
Technical Data				
Chamber volume	60L φ 296 × 490mm	80L φ 296 × 650mm	100L φ 480 × 560mm	120L φ 480 × 660mm
The height after rising(mm)	1310	1590	1475	1565
Working pressure	0.22MPa			
Working temperature	134℃			
Heat average	≤ ± 1℃			
Timer range	0-99min			
Temperature adjust range	105-134℃			
Power	Steam generator: 3KW, Dry blanket: 2.4KW/AC220V 50Hz		Steam generator: 3.6KW, Dry blanket: 2.4KW/AC220V 50Hz	
Overall dimension(mm)	686 × 556 × 913	686 × 556 × 1035	840 × 600 × 970	840 × 600 × 1060
Transport dimension(mm)	786 × 656 × 1013	786 × 656 × 1135	940 × 610 × 1000	940 × 610 × 1075
G.W/N.W	210kg / 180kg	230kg / 200kg	300kg / 270kg	325kg / 295kg

Main Spareparts



Vertical Pressure Steam Sterilizer



Use

The vertical pressure steam sterilizers are assembled with heating system, micro-computer controlled system, over heat and over pressure protection system, which are reliable for the sterilizing effects, convenient of operation and energy conservation. They are suitable for sterilizing equipment, dressings, containers, liquids, culture medium, waste, etc. in hospitals, disease control centers, P2 biological laboratories and blood stations, etc. of scientific research institutes.

Fully automatic circulation
(specifically use for
clinical laboratory)



Vertical Pressure Steam Sterilizer

LCD display automation



Vertical Pressure Steam Sterilizer

Technical Data

MODEL	LS-35HG	LS-50HG	LS-75HG	LS-100HG
Technical Data				
Chamber volume	35L φ 318 × 450mm	50L φ 340 × 550mm	75L φ 400 × 600mm	100L φ 440 × 650mm
Working pressure	0.22MPa			
Working temperature	134℃			
Max. working pressure	0.23MPa			
Heat average	≤ ± 1℃			
Timer range	0-99min or 0-99hour59min			
Temperature adjust range	0-134℃			
Power	1 × 2.5KW/AC220V 50Hz	2 × 1.5KW/AC220V 50Hz	3 × 1.5KW/AC220V 50Hz	
Overall dimension(mm)	470 × 450 × 1020	710 × 465 × 1150	750 × 510 × 1250	750 × 510 × 1250
Transport dimension(mm)	710 × 490 × 1130	740 × 550 × 1280	780 × 600 × 1380	780 × 600 × 1380
G.W/N.W	104kg / 85kg	122kg / 99kg	146kg / 120kg	148kg / 122kg

Use

The vertical pressure steam sterilizers are assembled with heating system, micro-computer controlled system, over heat and over pressure protection system, which are reliable for the sterilizing effects, convenient of operation and energy conservation. They are ideal equipments for clinics, scientific research institutes and other organizations to sterilize surgical instruments, fabrics, glasses, culture media etc.

Characteristics

- ◆ Fully stainless steel structure.
- ◆ Hand wheel type of quick-open door structure.
- ◆ Door safety lock system.
- ◆ LCD display of working status, touch type key.
- ◆ Auto discharge the cool air, and steam discharge automatically after sterilization.
- ◆ Over temperature & over pressure auto-protection.
- ◆ Safe protection of water lacking.
- ◆ Self-inflating type seal.
- ◆ Automatically shut off with beep reminding after sterilization.
- ◆ Easy to operate, safe and reliable.
- ◆ With two stainless steel sterilizing baskets.
- ◆ With drying system.

Technical Data

MODEL	LS-35HD	LS-50HD	LS-75HD	LS-100HD
Technical Data				
Chamber volume	35L φ 318 × 450mm	50L φ 340 × 550mm	75L φ 400 × 600mm	100L φ 440 × 650mm
Working pressure	0.22MPa			
Working temperature	134℃			
Max. working pressure	0.23MPa			
Heat average	≤ ± 1℃			
Timer range	0-99min or 0-99hour59min			
Temperature adjust range	105-134℃			
Power	1 × 2.5KW/AC220V 50Hz	2 × 1.5KW/AC220V 50Hz	3 × 1.5KW/AC220V 50Hz	
Overall dimension(mm)	470 × 450 × 1020	520 × 490 × 1150	550 × 530 × 1180	580 × 560 × 1290
Transport dimension(mm)	540 × 540 × 1140	580 × 580 × 1250	610 × 610 × 1280	640 × 640 × 1360
G.W/N.W	81kg / 63kg	94kg / 74kg	113kg / 93kg	125kg / 105kg

Portable Pressure Steam Sterilizer



Use

The product utilizes saturated steam to rapidly and efficiently sterilize articles. It can be used in hospitals, public health centers, health stations, clinics in factories and mines, scientific research institutes, etc, to sterilize medical equipment, surgical dressings, glass utensils, solutions, substrata. It can also be used as cooker in plateau areas and be used to make high quality drinking water in industrial and mining enterprises.

Characteristics

- ◆ Fully stainless steel structure.
- ◆ Double scale indication pressure gauge.
- ◆ Electric heated.
- ◆ Easy to operate, safe and reliable.

Technical Data

MODEL	YX-18LD	YX-24LD
Technical Data	18L φ280×260mm	24L φ280×390mm
Sterilizing volume	0.14~0.16MPa	
Working pressure	126℃	
Working temperature	0.165MPa	
Max. Safety pressure	≤±1℃	
Heat average	AC220V.50Hz/2KW	
Power	410×410×520	410×410×630
Transport dimension(mm)	18kg/16kg	19kg/17kg
G.W/N.W		

Use

The product utilizes saturated steam to rapidly and efficiently sterilize articles. It can be used in hospitals, public health centers, health stations, clinics in factories and mines, scientific research institutes, etc, to sterilize medical equipment, surgical dressings, glass utensils, solutions, substrata. It can also be used as cooker in plateau areas and be used to make high quality drinking water in industrial and mining enterprises.

Characteristics

- ◆ Fully stainless steel structure.
- ◆ Electric or LPG heated.
- ◆ Working pressure: 0.14~0.16Mpa.
- ◆ Working temperature: 126℃.
- ◆ Double scale indication pressure gauge.
- ◆ Easy to operate, safe and reliable.

Technical Data

MODEL	YX-18LM	YX-24LM
Technical Data	18L φ280×260mm	24L φ280×390mm
Sterilizing volume	0.14~0.16MPa	
Working pressure	126℃	
Working temperature	0.165MPa	
Max. Safety pressure	≤±1℃	
Power	AC220V.50Hz/2KW	
Transport dimension(mm)	410×410×430	410×410×550
G.W/N.W	16kg/14kg	17kg/15kg

Electric or LPG heated



Table Top Steam Sterilizer

Table Top Steam Sterilizer

Technical Data

MODEL	TM-T16J	TM-T24J
Technical Data	16L φ250×360mm	24L φ270×410mm
Sterilizing chamber volume	0.22MPa	
Working pressure	134℃	
Working temperature	105~134℃	
Temperature adjust range	0~60min	
Timer range	≤±1℃	
Heat average	1.5KW/AC220V.50Hz	
Power	340×200×30(3piece)	
Sterilizing plate(mm)	545×328×423	560×350×500
Dimension(mm)	605×390×480	620×410×570
Exterior package dimension(mm)	17kg/15kg	20kg/18kg
G.W/N.W		

Use

The table type sterilizers are safety auto-controlled, which are designed for the dental clinics, hospitals, school lab, scientific research institutions and laboratory. And mostly suitable for sterilizing of surgical, dental and eye instruments, glassware medicine, culture medium and biological dressing, food, etc.

Characteristics

- ◆ For 4~6 minutes rapidly sterilizing.
- ◆ Digital display of working status, touch type key.
- ◆ With 3 fixed cycles of sterilizing program and adjustable for user.
- ◆ The whole process of water adding, temperature rising, sterilizing, drying steam discharging controlled automatically.
- ◆ Steam-water inner circulation system: no steam discharge, and the environment for sterilizing will be clean and dry.
- ◆ Safe protection of water lacking.
- ◆ Exhaust the cool air automatically.
- ◆ Door safety lock system.
- ◆ With four stainless steel sterilizing plates.
- ◆ The chamber of the sterilizer is made of stainless steel.
- ◆ Automatically shut off with beep reminding after sterilization.
- ◆ With drying function.

Technical Data

MODEL	TM-XD20D	TM-XD24D
Technical Data	20L φ250×420mm	24L φ250×520mm
Sterilizing chamber volume	0.22MPa	
Working pressure	134℃	
Working temperature	105~134℃	
Temperature adjust range	0~99min	
Timer range	≤±1℃	
Heat average	1.5KW/AC220V.50Hz	
Power	340×200×30(3piece)	400×200×30(3piece)
Sterilizing plate(mm)	480×680×455	480×680×455
Dimension(mm)	580×700×500	580×800×560
Exterior package dimension(mm)	43kg/40kg	50kg/45kg
G.W/N.W		





Horizontal Cylindrical Pressure Steam Sterilizer

Technical Data

MODEL	WS-150YDB	WS-200YDB	WS-280YDB
Technical Data	150L	200L	280L
Sterilizing chamber volume	φ 440 × 1000mm	φ 515 × 1000mm	φ 600 × 1000mm
Working pressure	0.22MPa		
Working temperature	134°C		
Temperature adjust range	40~134°C		
Time for sterilization	0~99min		
Time for drying	0~99min		
Heat average	≤ ± 2°C		
Power	9KW/380V.50Hz	9KW/380V.50Hz	12KW/380V.50Hz
Dimension(mm)	1400 × 650 × 1820	1400 × 750 × 1700	1520 × 910 × 1900
Transport dimension(mm)	1560 × 860 × 1820	1560 × 910 × 1880	1680 × 1060 × 2050
G.W/N.W	430kg / 340kg	436kg / 350kg	570kg / 462kg



Horizontal Cylindrical Pressure Steam Sterilizer

Technical Data

MODEL	WS-150YDA	WS-200YDA	WS-280YDA	WS-400YDA	WS-500YDA
Technical Data	150L	200L	280L	400L	500L
Sterilizing chamber volume	φ 440 × 1000mm	φ 515 × 1000mm	φ 600 × 1000mm	φ 700 × 1100mm	φ 700 × 1300mm
Working pressure	0.22MPa				
Working temperature	134°C				
Temperature adjust range	40~134°C				
Time for sterilization	0~60min				
Time for drying	0~60min				
Heat average	≤ ± 2°C				
Power	9KW/380V.50Hz	9KW/380V.50Hz	12KW/380V.50Hz	18KW/380V.50Hz	18KW/380V.50Hz
Dimension(mm)	1400 × 600 × 1300	1400 × 670 × 1650	1400 × 770 × 1780	1430 × 880 × 1830	1800 × 900 × 1820
Transport dimension(mm)	1560 × 750 × 1850	1560 × 820 × 1850	1680 × 920 × 1950	1600 × 1050 × 2050	1850 × 1050 × 2050
G.W/N.W	320kg / 240kg	350kg / 260kg	465kg / 365kg	530kg / 420kg	580kg / 470kg

■ Spine Surgical Navigation System Intraoperative 3D imaging C-arm



- Verifying surgical outcome through intraoperative 3D imaging
- Improved efficiency powered by adaptive image registration
- Maximizing surgical confidence with state-of-art surgical navigation
- Visualization of instrumentation

■ Mobile FPD C-arm for Vascular Intervention



- Extend your peripheral vascular intervention capabilities with DSA program
- Powerful 25kW output gives clear and sharp images
- Outstanding image quality guaranteed by latest flat panel technology
- Wide C-arm coverage and motorized movement offer flexibility for versatile procedures

■ All-in-one Mobile FPD C-arm



- Overall design and small footprint maximize OR space
- Standby power supply makes surgeries instant sharing
- Built-in anatomical program offers fast exposure parameters setting 30cm x
- 30cm large flat panel* provides more perspective for clinical practice

■ Mobile FPD C-arm



- Quick boot up by one single button push
- Dynamic flat panel technology gives higher signal conversion efficiency
- High frequency pulsed fluoroscopy and DAP monitoring provide lower dose management

■ Mobile FPD C-arm Wireless Interconnection



- Convenient maneuverability maximized in wireless connection
- Upgraded FPD expand the FOV by 25%
- X ray safety lock prevents radiation incident caused by misoperation

■ High Frequency Digital Mobile C-arm



- Mega pixel CCD camera and HD image chain offer excellent image quality
- Low dose radiation powered by pulse fluoroscopy
- User friendly interface improves your surgical efficiency

■ All-in-one Digital Mobile C-arm



- Overall design and small footprint design maximize OR space
- Automatic brightness control for better imaging
- Point-and-shoot user interface

■ Mobile Digital Radiography



- 65kW high power generator provides stable and clear image quality
- 17" × 17" super wide FPD with 16 bit grey scale
- Intelligent dose control technology automatically adjust radiation dose
- Ultrasound distance measurement provides precise positioning

■ Mobile Digital Radiography



- Versatile wireless flat panel options enable comfortable positioning
- Stylish anti-collision bumper design can prevent damage
- Intelligent dose control technology automatically adjust radiation dose
- Easy integration into existing IT networks

■ Mobile Digital Radiography



- Overall design and small footprint design maximize ward space
- Unique locating mode provide perfect and handy operation
- Precise and effortless adjustment of supporting arm and tube head

■ Mobile Digital Radiography



- Auto tracking feature between X ray tube and flat panel detector
- High power X ray generator and tube provide sharp images for accurate diagnosis

■ Dynamic Digital Radiography



- 100kW high power and high frequency generator
- Super size flat panel reveals more anatomical details
- Dynamic imaging with outstanding performance
- Breakthrough in full spine and full lower extremities radiography

■ Dynamic Digital Radiography



- High performance FPD, guaranteeing high quality images with more anatomical details
- All in one machine with functions of digital radiography and fluoroscopy
- Real-time DAP monitoring, providing more care and safety

■ Digital Motion X-ray U-arm Series



- Flexible U arm movement for complex radiography positioning
- High definition image quality and visual dynamic contrast
- Fast and stable imaging, simple and convenient operation
- Touch screen interface with built-in graphical anatomy APR setting

■ High Frequency Digital Radiography



- Compact design maximizes rad room space
- 17"× 17"large size FPD delivers best chest radiography solution
- Large heat capacity of X ray tube ensures long durability of workflow
- Flexible U arm positioning easy for complex radiography

Digital Motion X-ray Bucky Table Series



- Dynamic FPD for radiography, fluoroscopy and spotimaging
- Rich FPD configurations for various needs
- Auto-Tracking Function between X-ray tube and flatpanel detector
- 35cm ground clearance of X ray tube make low profileradiography easy and simple

Digital Radiography Bucky Table Series



- Large size touch user interface for easy exposure control
- Divers configurations offer rich choices for clinical solution
- 3D positioning guidance helps patient for fast and accurate diagnosis
- Default real time DAP monitoring

Digital Radiography Bucky Table Series



- 220V single-phase /three-phase power
- Intuitive digital display
- Flexible table movement gives convenience maneuverability
- Easy access to PACS, HIS

Digital Radiography Ceiling Mounted series



- High performance FPD, guaranteeing high quality images with more anatomical details
- Large size touch user interface for easy exposure control
- Ceiling mounted frame covers a wide exposure area, multi-dimensional moveable bucky stand for various radiography position

Digital Radiography Ceiling Mounted series



- All in one machine with functions of radiography and fluoroscopy
- Dynamic flat panel detector to obtain high quality images with more anatomical details
- Versatile flat panel options enable rich choices for clinical solution

Digital Radiography & Fluoroscopy



- DRF making radiography as well as fluoroscopy with dynamic FPD
- 17" x 17" dynamic flat panel detector provides large exposure area
- High frequency and high voltage generator guarantees the x-ray quality
- Pulse fluoroscopy mode current can reach 20mA, providing sharp image with low dose
- Software has strong capabilities including automatic stitching function

DEFIBRILLATOR



- Defibrillator typ:Manual, Asynchronized
- Energy accuracy: $\angle +1\%$
- Energy selection:0, 3, 5, 7, 10, 20, 30,50,100, 200, 300, 360 joules (nominal at a resistanceof 50)
- Charging time:Maximum 10 seconds to 360 Joules
- Standard Adult/Pediatric Paddles Reusable external adult paddles (pediatric paddles integrated)



- Defibrillator typeManual,Synchronized, Asynchronized,
- Energy accuracy: $\angle +1\%$
- Energy selection:0,20,50,100,160,250,300, 360 joules (nominalataresistanceof50)
- Charging time:Maximum10secondsto360 Joules
- Standard Adult/PediatricPaddles Reusable external adult paddles(pediatricpaddles integrated)



- Defibrillator type:Manual,Synchronized, Asynchronized,
- Energy accuracy: $\angle +1\%$
- Energy selection:0,3,5,7,10,20,30,50,100, 200, 300, 360 joules(nominalataresistanceof 50)
- Charging time:Maximum10secondsto360 Joules
- Standard Adult/PediatricPaddlesReusable external adult paddles (pediatricpaddles integrated)



Vascular Doppler System

BV-660T/660T+
Peripheral Vascular Disease Detector

Application

It is mainly used for rapid and accurate diagnosis and diagnosis of non interventional peripheral vascular disease (PAD) in human body. By measuring the doppler ultrasound technique for ABI and TBI parameters to improve the doctor's detection rate of the diagnosis of peripheral vascular disease, it can quantitatively determine the detection rate of the diagnosis of peripheral vascular disease, and can quantitatively determine the severe degree of patients' peripheral vascular disease;It is suitable for geriatric department, cardiovascular department, Department of Endocrinology, physical examination department and other departments.

Features



Working Interface

- Three kinds of blood pressure waveform measurement mode, easy for doctors to choose to use;
- It's only necessary to measure blood pressure at the wrist / ankle to diagnose the disease;
- Can automatically calculate ABI and TBI, and calculate the results;
- It is compatible with bidirectional, unidirectional blood flow probe and PPG probe, which is convenient for doctors to measure different parts;
- 1 million groups of data can be stored, and the data can be backed up to the hospital database at any time;
- Configuration of laser printer is convenient for recording and analyzing test data;
- Mobile cart design, equipped with super large LCD display;
- BV-660T+ can measure the maximum systolic pressure of upper limb and lower limb simultaneously and calculate ABI or TBI automatically, which is easy to operate and shortens the test time; Portable cart is available for bedside operation;

Peripheral arterial disease is a common disease that develops into typical intermittent claudication or rest pain symptoms in the later stages. Further development can cause lower limb ulcers, infections, necrosis, and even amputation;The most simple and effective method for diagnosing peripheral arterial disease is the ankle brachial ratio (ABI) examination.ABI is the ratio between the systolic pressure of the ankle artery and the systolic blood pressure of the upper arm. It is a convenient and non-invasive method of examination;Many international and domestic experts and academic toes have called for active ABI periodic examinations to cope with the high-risk population of PAD, so as to make early diagnosis and early treatment of PAD.

Slit Lamp



- Professional acquisition media
- Quick shooting
- Solid vision light - background light integrated lighting
- High definition image
- Diagnostic aid function

Eyeball protrusion meter



- The height of the eye protruding from the outer orbital rim can be accurately measured by applying an optical glass prism with an isosceles right triangle, projecting both the corneal vertex and the graduated scale through the total reflection of the oblique surface to the front of the prism.

Synoptophore



- Optical viewing system: The optical viewing system of the YZ23B synoptic machine uses a semi-translucent, semi-retro-reflective reflector for the practitioner to easily observe the patient's eye movements and corneal reflection points.



Tables of Ophthalmology



Flattening ophthalmometer



Flattening ophthalmometer



Inspection glasses



Inspection glasses



Binocular indirect inspection glasses

■ Sterilization packaging material series



TYVEK STERILIZATION REEL



FLAT STERILIZATION REEL



Sterilization Indicator Tape



Medical Crepe Paper




GUSSETED STERILIZATION REEL



Self Sealing STERILIZATION POUCH



PAPER/PAPER Bag

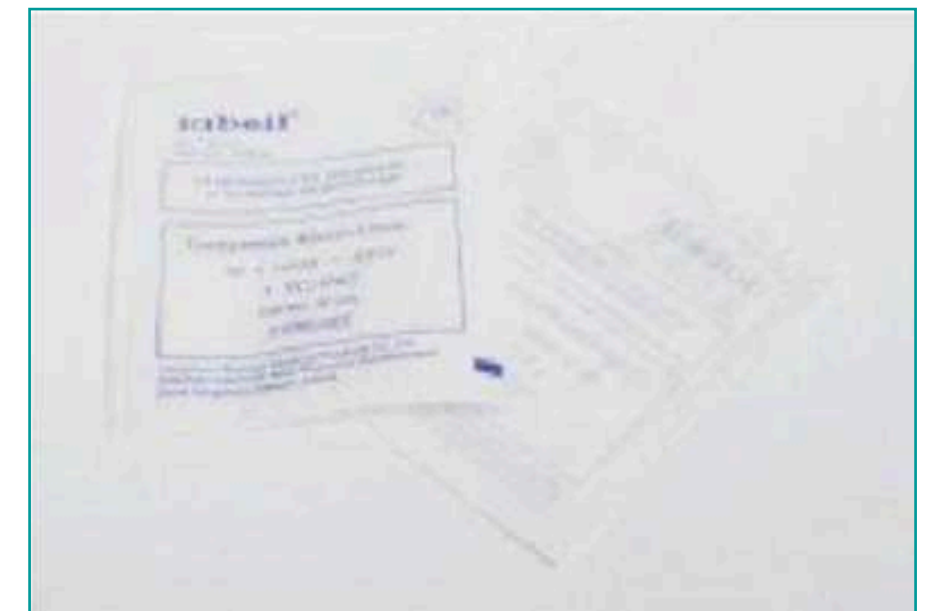

PAPER/PLASTIC Bag



Heat Sealing/FLAT STERILIZATION POUCH



Heat Sealing/GUSSETED STERILIZATION POUCH



Medical Coated Paper




Composite Film

Protective sleeve series



B Ultrasonic probe protective cover(TPU)

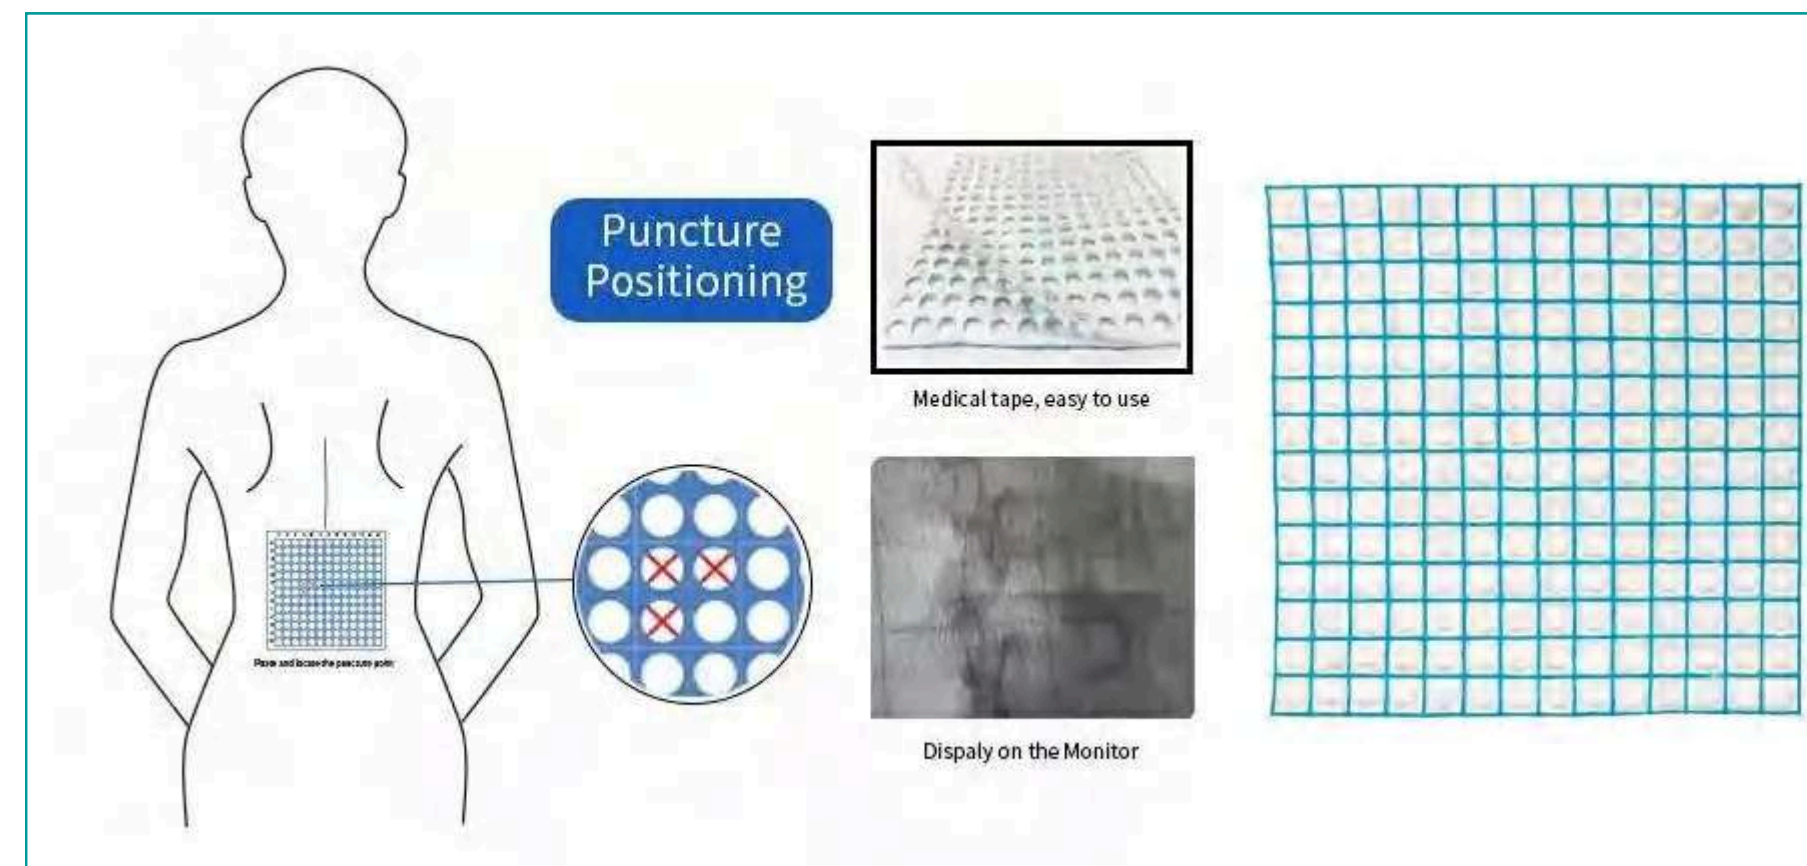

Detectable positioning tape



C-Arm cover



Disposable Shadowless Lamp Handle Drape (Light handle cover)



Microscope cover(with lens cap)



Probe Covers



Medical absorbent pads



Surgical patties

Consumable Accessories



Pinch Clamp



Dispensing Needle



Transparent ABS Male Luer



ABS Material Cap For Drip Chamber



Proof Protective Small Cap



Stopcock 2 Way



Injection Needle Connection



Transparent ABS Y Injection Site



Cross Valves



Push-pull Valves



ABS Material Bed Sheet Clip



Blood Transfusion Giving Set Accessories



Plastic Slide Clamp



Blood Transfusion Giving Set Accessories



Precision Flow Regulator



Accessories Flow Regulator



Blood Lancet Accessory Needles For Blood Transfusion Set



Needle Free Valve

High Flow Precision Filter




Features:

- No leakage under 300Kpa 15S
- High flow / fast priming available
- Remove bubble

Material:

- ABS body
- PES membrane
- PTFE membrane


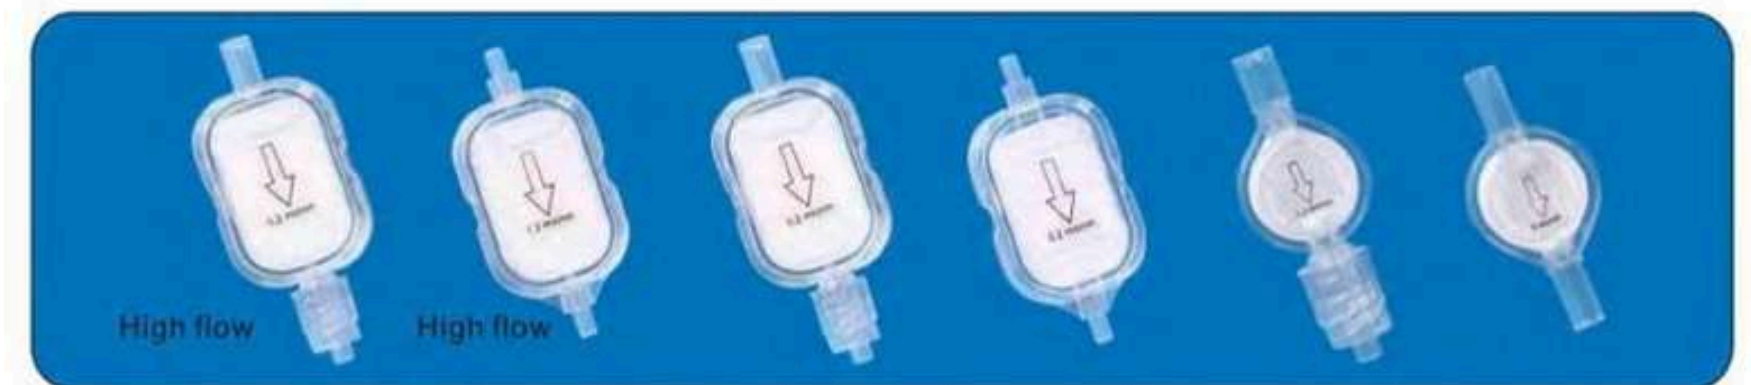


Description	Color	Aperture	Filter efficiency	Minimum flow rate	Inlet & outlet	Effective filtration area
Adult Square filter High flow sery Air-Vented	Clear /Amber	0.2um	Sterilizing-grade	>320mL/10min	2.9*4.05mm Tubing IN/OUT FLL IN/RMLL OUT	12 cm ²
		1.2um	≥90%	>1000mL/10min		
		5um	≥90%	>1000mL/10min		
Kid Square filter Air-Vented	Clear /Amber	0.2um	Sterilizing-grade	>150mL/10min	1.5*3.0mm Tubing IN/OUT FLL IN/RMLL OUT	6 cm ²
		1.2um	≥90%	>900mL/10min		
		5um	≥90%	>1000mL/10min		
Baby Droplet filter Air-Vented	Clear /Amber	0.2um	Sterilizing-grade	>40mL/10min	1.5*3.0mm Tubing IN/OUT FLL IN/RMLL OUT	1.5 cm ²
		1.2um	≥90%	>300mL/10min		
		5um	≥90%	>550mL/10min		

Needle Free Valve Extension Line With Back Check Valve

带无针加药口和单向阀延长管

- Safer Than Heparin Cap With Needle Free Valve
- Prevent Backward Fluid Of Blood
- No Leakage Under 300kPa
- Latex Free

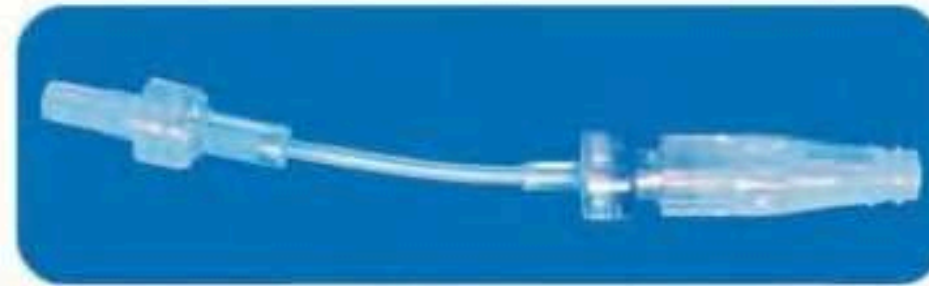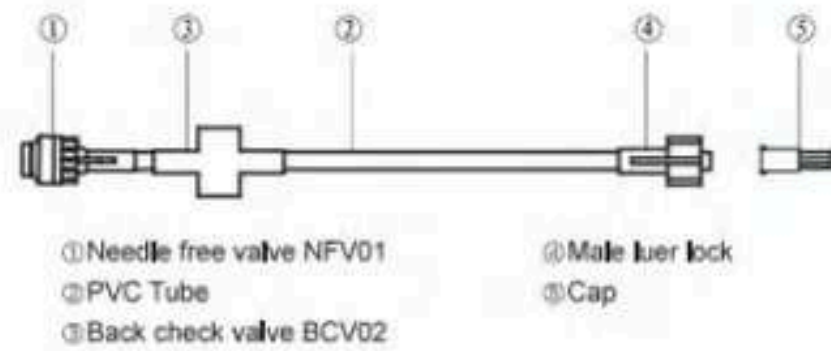


Tub Size (I.D.xO.D.)
1-Way 1,3x2,3

Extension Line With Needle Free Valve

带无针加药口延长管


- Safer Than Heparin Cap With Needle Free Valve
- No Leakage Under 300kPa
- Latex Free

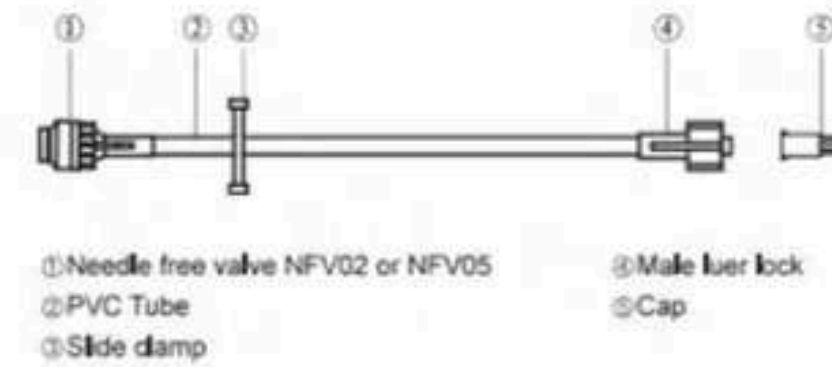




Tub Size (I.D.xO.D.)
1-Way 1,3x2,3
1-Way 3,0x4,0




Tub Size (I.D.xO.D.)
2-Ways 1,3x2,3

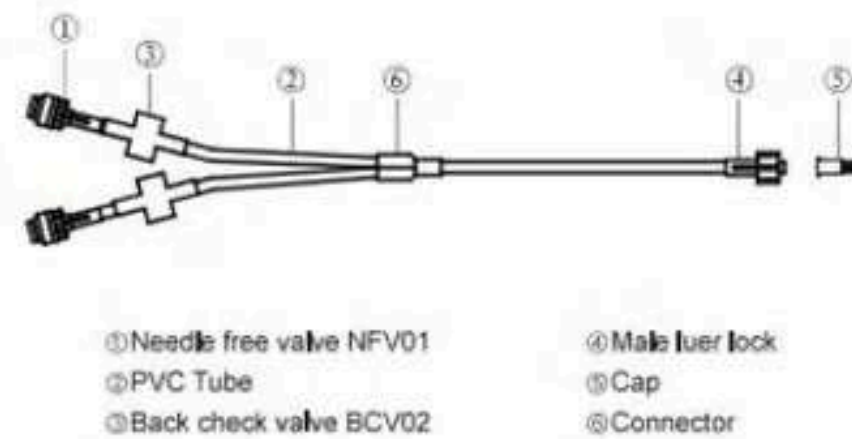

Tub Size (I.D.xO.D.)
2-Ways 1,3x2,3
2-Ways 3,0x4,0

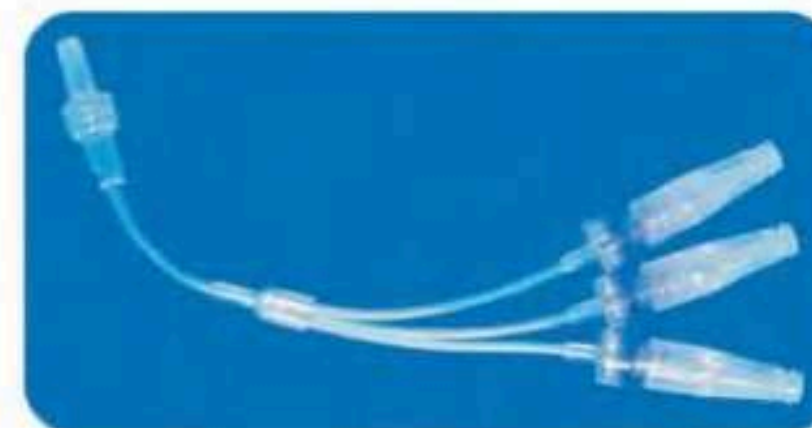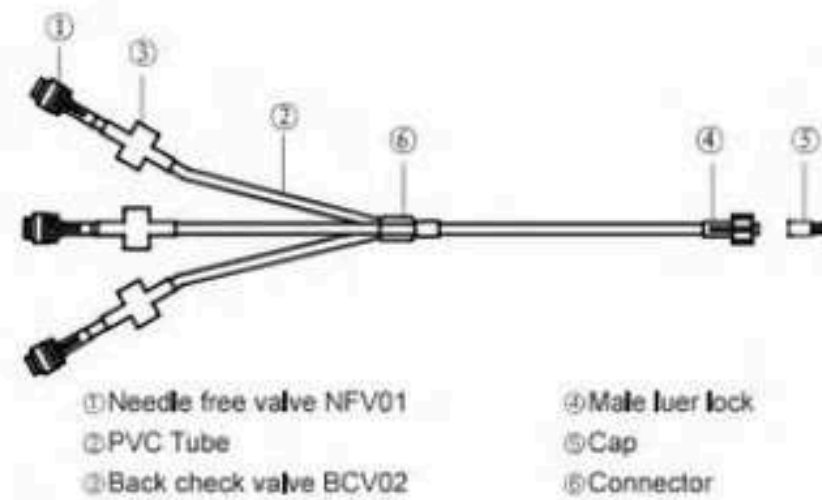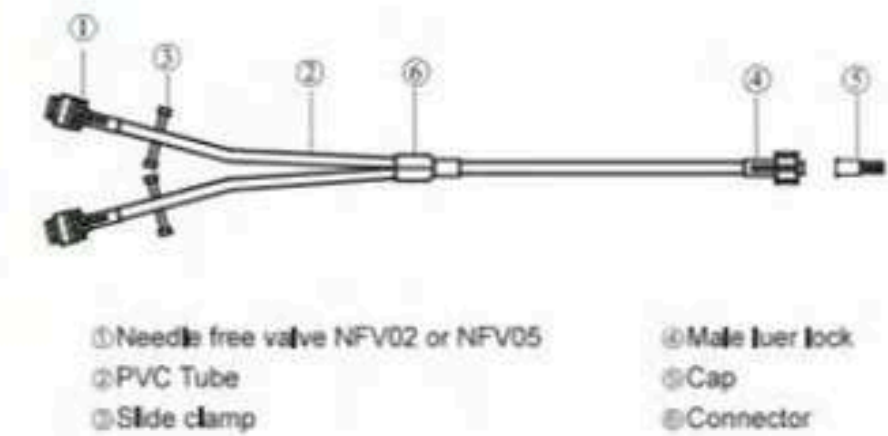

Tub Size (I.D.xO.D.)
3-Ways 1,3x2,3

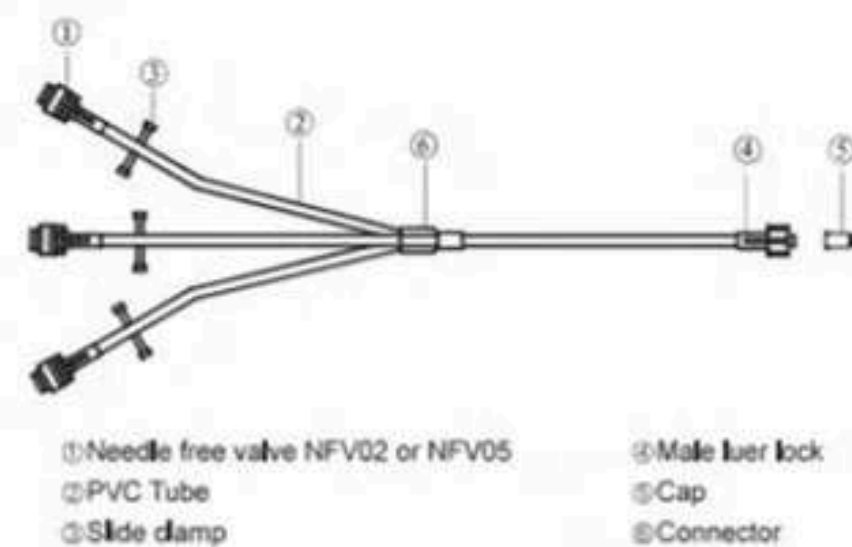

Tub Size (I.D.xO.D.)
3-Ways 1,3x2,3
3-Ways 3,0x4,0

Spike & Back Check Valve

Spike



双头型针
Spike

- Double Ended Transfer Spike
- Material: ABS & PE



型针
Spike

- For tubing O.D. 4.1mm
- Material: ABS

型针
Vented Spike

- For tubing O.D. 4.0mm
- Material: ABS



型针
Vented Spike

- For tubing O.D. 4.0mm
- Material: ABS



Back Check Valve

BCV


单向阀
Back Check Valve (One-Way Valve)

- Back Pressure: > 300kPa
- Flow rate: 100ml/min
- Latex Free



Product Description:
Female-Male Ends
Male-Tube Ends 2.3*3.5mm (I.D.xO.D.)
Female-Tube Ends 2.3*3.5mm (I.D.xO.D.)
Tube-Tube Ends 2.3*3.5mm (I.D.xO.D.)

High Pressure Manifold & Stopcock

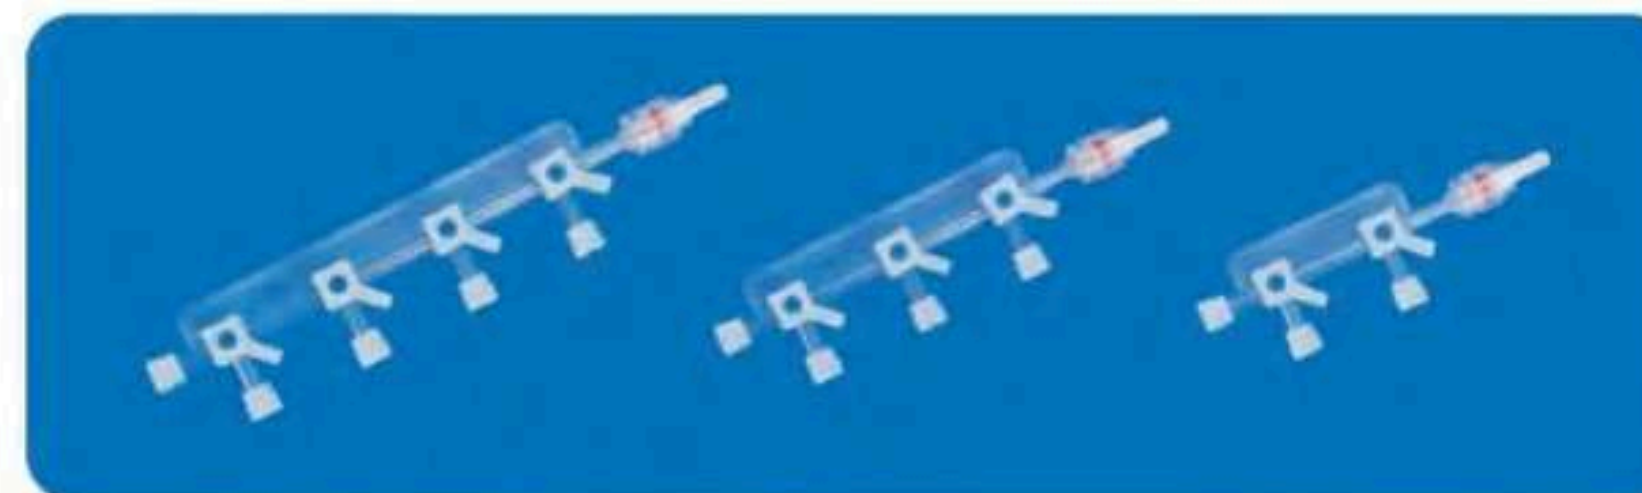

High Pressure Manifold

高压联板

- No Leakage under 500psi
- Smooth rotation, easy use
- Different color for choice

2 Ports
3 Ports
4 Ports

Product Description
"ON" type with rotating adapter, Right port orientation
"OFF" type with rotating adapter, Right port orientation
"ON" type with rotating adapter, Right port orientation
"OFF" type with rotating adapter, Right port orientation
"ON" type with pressure line, Right port orientation
"ON" type with rotating adapter, left port orientation
"OFF" type with rotating adapter, left port orientation
"ON" type with rotating adapter, Right port orientation
"OFF" type with rotating adapter, Right port orientation

High pressure Stopcock

高压三通阀

- No Leakage under 1000psi Pressure
- Different color for choice
- Smooth rotation, easy use



Product Description
"ON" Type, Rotating Adapter, No Leakage under 1000psi Pressure
"ON" Type, Rotating Adapter, No Leakage under 500psi Pressure
"OFF" Type, Rotating Adapter, No Leakage under 1000psi Pressure
"OFF" Type, Rotating Adapter, No Leakage under 500psi Pressure

Injection Site



嵌入式三通加药口合成胶
Y-injection site, latex-free

- Size: length=35mm, with easy handle
- Material: ABS, Isoprene rubber



嵌入式三通加药口合成胶
Y-injection site, latex-free

- Size: length=35mm, with easy handle
- Material: ABS, Isoprene rubber



嵌入式三通加药口合成胶
Y-injection site, latex-free

- Size: length=32.4mm, with easy handle
- Material: PC, Isoprene rubber
- Pre-pierced available



嵌入式三通加药口合成胶
Y-injection site, latex-free

- Size: length=35mm
- Material: ABS, Isoprene rubber



嵌入式三通加药口合成胶
Y-injection site, latex-free

- Size: length=38.9mm
- Material: PC, Isoprene rubber
- Pre-pierced available



嵌入式三通加药口合成胶
Y-injection site, latex-free

- Size: length= 35mm
- Material: ABS, Isoprene rubber



透明肝素帽
Transparent male luer lock injectors site

- Heparin cap, latex-free
- Material: ABS, Isoprene rubber



八角透明肝素帽
Transparent male luer lock injectors site

- Heparin cap, latex-free
- Material: ABS, Isoprene rubber



合成胶肝素帽
Male luer lock injection site

- Heparin cap, latex-free
- Material: ABS, Isoprene rubber



透明肝素帽
Transparent male luer lock injectors site

- Heparin cap, latex-free
- Material: PC, Isoprene rubber
- Pre-pierced available



合成胶肝素帽
Male luer lock injection site

- Heparin cap, latex-free
- Material: PC, Isoprene rubber
- Pre-pierced available



乳胶泡合成胶
Flashback, latex-free

- Size: length=45mm
- Material: Isoprene rubber

Roller Clamp

长尾调节器
Precision V Roller clamp

- Size: length=56mm
- For tubing O.D.4.0mm
- Material: ABS



短尾调节器
Precision V Roller clamp

- Size: length= 56mm
- For tubing O.D.4.0mm
- Material: ABS

小调节器
Precision V Roller clamp

- Size: length= 45mm
- For tubing O.D.4.0mm
- Material: ABS



短尾调节器
Precision V Roller clamp

- Size: length=56mm
- For tubing OD 4.0-4.2mm
- Material: ABS

止液调节器
Roller clamp used on air stop infusion set

- Size: length= 56mm
- For tubing O.D.4.0mm
- Material: ABS



Luer Lock



母螺旋
Female Luer Lock

- Size: For tube OD 2.5/3.0/4.0mm
- Material: ABS/PC
- Cap: HT105, PE



母螺旋
Female Luer Lock

- Size: For tube O.D. 3.0/4.0/5.0/5.4mm
- Material: PC/ABS



母螺旋
Female Luer Lock

- Size: For tubing OD 4.0mm
- Material: PC



母螺旋
Female Luer Lock

- Size: For Tubing I.D. 4.0/4.7/6.4mm
- Material: PC



螺旋座
Male Luer Lock

- Size: length=32mm, for flashback
- Material: ABS
- Cap: HT102, PE



内外扣管式螺旋座
Male Luer Lock

- Size: length=40mm, for tube 3x4.1mm
- Material: ABS
- Cap: HT103, PE



公螺旋
Male Luer Lock for extension

- Size: For tube OD 2.5/3.0/4.0mm
- Material: ABS/PC
- Cap: HT104, PE



公螺旋
Male Luer Lock

- Size: For tubing I.D. 4.0/4.7/6.4mm
- Material: PC



公螺旋
Male Luer Lock

- Size: For Tubing O.D. 4.0mm
- Material: ABS/PC



混药接头
Fluid Dispensing Connector

- Female to female ends
- Sterile, blister package



护帽
Cap

- Material: PE/PP
- L= 19mm
- Non-vented



三通
Connectors

- Size: For tube O.D. 2.3/4.0mm
- Material: PVC

Luer Lock



三联件/可拆卸螺旋座
Detachable spin Luer lock

- Size: for tube OD 4.0mm
- Material: ABS
- Cap: HT106, PE



透光三联件/可拆卸螺旋座
UV Detachable spin Luer lock

- Size: for tube OD 4.0mm
- Material: ABS
- Cap: HT106, PE



三联件/可拆卸螺旋座
Detachable spin Luer lock

- Size: for tube OD 4.0mm
- Material: ABS
- Cap: HT130, PP, blue/green/red With hydrophobic membrane 0.2/1.2/3.0µm



三联件/可拆卸螺旋座
Detachable spin Luer lock

- Size: for tubing OD 2.0/2.2/2.4/2.5mm
- Material: ABS/PC
- Cap: HT107, PE



不可拆卸/可旋转螺旋座
Undetachable spin Luer lock

- Size: for tubing OD 3.6/4.0mm
- Material: PC
- Cap: HT106



螺旋座
Male Luer Lock

- Material: ABS
- For Tube OD 2.9/4.0MM



带翅膀三通
Male Luer slip

- Size: length=30mm, for flashback
- Cap: HT107, PE



小三通
Male Luer slip

- L=29mm
- Size: For Flashback
- Cap: HT107, PE



三联件三通
Male Luer slip

- L=28mm
- Size: For tube OD 3.0/4.0 mm
- Cap: HT107, PE

Cap



护帽
Cap

- Material: ABS
- For stopcock



护帽
Cap

- Material: PE
- For stopcock



带孔护帽
Cap With Hole

- Material: PP

Blood Glucose Meter



Feature	Specification
Measurement Range	1.1-33.3 mmol/L(20-600 mg/dL)
Result Calibration	Plasma-equivalent
Sample	Fresh whole blood(Capillary)
Minimum Sample Size	1µL
Test Time	5 Seconds
On/Off Source	One CR 2032 3.0V coin cell battery
Battery Life	Minimum of 1,000 measurements (without considering data transfer and test reminder alarm)
Glucose Units of Measure	The Meter is pre-set to either millimoles Per liter(mmol/L) or milligrams per deciliter(mg/dL) depending on the standard of your country
Memory	Up to 500 records with time and date
Automatics shutoff	2 minutes after last action
Meter Size	83mm×57mm×22mm
Display Size	41mm×37mm
Weight	40g (with battery installed)
Operating Temperature	5-45°C
Operating Relative Humidity	20-90%
Hematocrit Range	25-60%

Portable Blood Lactic Test Meter



Feature	Specification
Measurement Range	0.5-25 mmol/L(9-450 mg/dL)
Sample	Fresh whole blood (Capillary)
Minimum Sample Size	0.7 µL
Test Time	20 Seconds
On/Off Source	One CR 2450 3.0 V coin cell battery
Battery Life	Minimum of 1,500 measurements (without considering test reminder alarm)
Lactate Units of Measure	The Meter is pre-set to either millimoles per liter (mmol/L) or milligrams per deciliter(mg/dL) depending on the standard of your country
Memory	Up to 500 records with time and date
Automatic shutoff	1 minute after last action
Meter Size	83mm×57mm×22mm
Display Size	40mm×36mm
Weight	56g (with battery installed)
Operating Temperature	5-45 °C
Operating Relative Humidity	20-80%
Hematocrit Range	20-60%

TRUST-WORTHY STABLE OXYGENATION OXYGEN CONCENTRATORS



- Flow Range: 0.5-5L/min
- Oxygen Concentration: 95.5%-97%
- Maximum Limited Pressure: 70kPa
- Sound Level: 48 dB(A)
- Input Power: 350VA
- Minimum Operating Time: 30minutes

QTN: 1PCS/CTN
G.W./N.W: 17.5/15.5kgs
Size: 48.5×34×60cm




- Flow range: 0.5-5L/min
- Oxygen concentration: 95.5%-97%
- Maximum outlet pressure: 70kPa
- Sound level: 43dB(A)
- Nebulizing rate: 0.1mL/min(99-58W only)
- Input power: 400VA
- Minimum operating time: 30minutes

QTN: 1PCS/CTN
G.W./N.W: 20.5/17.5kgs
Size: 48×40×63cm



Ultra silence

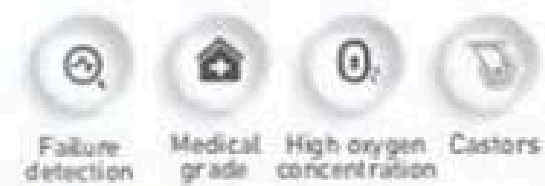


Optional function




- Flow Range: 0.5- 5L /min[7F-5] 1- 10L /min[7F-10]
- Oxygen Concentration: 95.5% ~ 97%
- Maximum Limited Pressure: 70kPa
- Sound Level: 55 dB (A)[7F-5]
≤50dB (A)[7F-10]
- Input Power: 500 VA[7F-5] 850VA[7F-10]
- Minimum Operating Time: 30minutes

QTN: 1PCS/CTN
G.W./N.W: 29/27kgs[7F-5] 37.5/33kgs[7F-10]
Size: 49.5×43×78cm[7F-5] 57×49.5×80.5cm[7F-10]

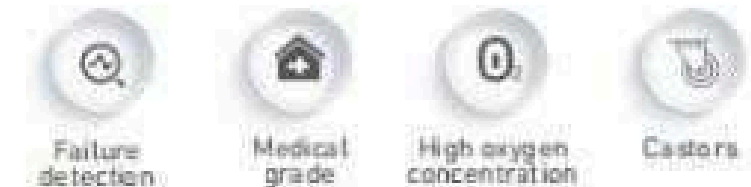

- Flow Range: 0.5-3L/min.
- Oxygen Concentration: ≥90%
- Maximum Limited Pressure: 50kPa
- Noise: ≤50dB (A)
- Input Power: 230VA

QTN: 1PCS/CTN
G.W./N.W: 11/7.8kgs
Size: 42×26×55cm

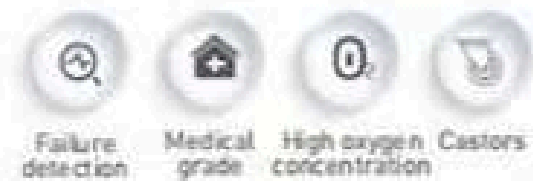


Optional function



- Flow Range: 0.5- 5L /min
- Oxygen Concentration: 95.5% ~ 97%
- Maximum Limited Pressure: 70kPa
- Sound Level: ≤55 dB (A)
- Input Power: 400 VA
- Minimum Operating Time: 30minutes

QTN: 1PCS/CTN
G.W./N.W: 26/24kgs
Size: 56×39.5×71.5cm

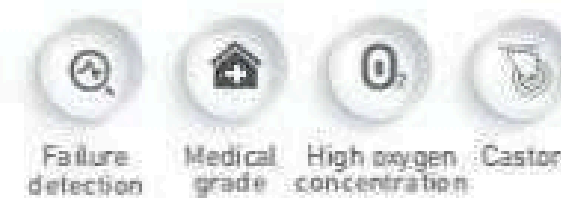

Optional function



- Flow Range: 0.5-3L/min
- Oxygen Concentration: 93%±3%
- Maximum Limited Pressure: 50kPa
- Sound Level: 55 dB (A)
- Input Power: 320 VA
- Minimum Operating Time: 30minutes

QTN: 1PCS/CTN
G.W./N.W: 26/24kgs
Size: 56×39.5×71.5cm



ELECTRONIC BLOOD PRESSURE MONITORS



- Large backlight LCD display
 - 100 groups of memory
 - Indication for irregular heartbeats
 - Detection for cuff wearing
 - Indication for Movement Error
 - Cuff storage
 - Portable
 - Double measuring method
 - Selectable pressuring
 - Anti-collision design
 - Dual-mode of automatic and auscultation measurement
- QTN: 10PCS/CTN
G.W./N.W.: 20.4/5.9kgs
Size: 66.5*40.5*33cm
Weight: 584g



- 80 groups of memory
 - Average of three measurements
- QTN: 10PCS/CTN
G.W./N.W.: 8.8/3.5kgs
Size: 50*30*22cm
Weight: 251g



- Large LCD display
 - 90 groups of memory
 - Indication for irregular heartbeats
 - Detection for cuff wearing
 - Indication for Movement Error
 - Average of three measurements
- QTN: 10PCS/CTN
G.W./N.W.: 8.8/3.5kgs
Size: 50*30*22cm
Weight: 260g



- Voice broadcast function
 - Large LCD digital display
 - 99 groups of memory
 - Indication for irregular heartbeats
 - Detection for cuff wearing
 - Indication for Movement Error
 - Average of three measurements
- QTN: 10PCS/CTN
G.W./N.W.: 7.3/3.8kgs
Size: 61.5*28.5*22cm
Weight: 270g



- Voice broadcast function
 - Large Backlit LCD display
 - 90 groups of memory
 - Indication for irregular heartbeats
 - Detection for cuff wearing
 - Indication for Movement Error
 - Average of three measurements
- QTN: 10PCS/CTN
G.W./N.W.: 8.7/3kgs
Size: 61.5*28.5*22cm
Weight: 200g



- Voice broadcast function (Optional) (Voice can be turned off)
- Large LCD Display
- 74x2 groups of memory
- Indication for irregular heart beats
- Detection for cuff wearing
- Indication for Movement Error
- Average of three measurements

QTN: 10PCS/CTN
G.W./N.W.: 8.3/0.8kgs
Size: 50x30x22cm
Weight: 294g



- Voice broadcast function (Voice can be turned off)
- Large LCD Display
- 60x2 groups of memory
- Indication for irregular heart beats
- Detection for cuff wearing
- Indication for Movement Error
- Average of three measurements
- Bluetooth (optional)
- Lithium battery

QTN: 10PCS/CTN
G.W./N.W.: 7.6/4.0kgs
Size: 50x30x22cm
Weight: 303g



- Indication for Position
- Large LCD display
- 60 groups of memory
- Indication for Position
- Indication for irregular heart beats
- Detection for cuff wearing
- Indication for Movement Error
- Average of three measurements
- Bluetooth (optional)

QTN: 10PCS/CTN
G.W./N.W.: 2.4/0.9kgs
Size: 38.5x23x11.5cm
Weight: 90g



- Indication for Position
- Large LCD display
- 60 groups of memory
- Indication for Position
- Indication for irregular heart beats
- Detection for cuff wearing
- Indication for Movement Error
- Average of three measurements

QTN: 10PCS/CTN
G.W./N.W.: 2.4/0.9kgs
Size: 38.5x23x11.5cm
Weight: 90g



- Voice broadcast function
- Large Backlit LCD display
- 99 groups of memory
- Indication for irregular heart beats
- Detection for cuff wearing
- Indication for Movement Error
- Average of three measurements

QTN: 10PCS/CTN
G.W./N.W.: 8.4/2.9kgs
Size: 61.5x28.5x22cm (with 360 cuff)
Weight: 290g




- Voice broadcast function
- Large backlit LCD display
- 99x2 memory groups
- Indication for irregular heart beats
- Detection for cuff wearing
- Indication for Movement Error
- Average of three measurements
- Bluetooth (optional)

QTN: 10PCS/CTN
G.W./N.W.: 9.6/3.3kgs
Size: 61.5x28.5x22cm
Weight: 310g




- Voice broadcast function
- Large LCD Display
- 74 groups of memory [YE8800AR]
- 60 groups of memory [YE8800C]
- Indication for Position [YE8800AR]
- Indication for irregular heartbeats [YE8800AR]
- Detection for cuff wearing [YE8800AR]
- Indication for Movement Error [YE8800AR]
- Average of three measurements
- Lithium battery / Dry battery

QTN: 10PCS/CTN
G.W./N.W.: 3.1/1.1 kgs
Size: 53x24.5x13cm
Weight: 109g

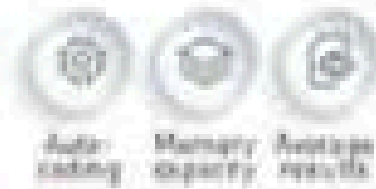

- Enzyme: GOD
- Unit: mg/dL or mmol/L
- Blood volume: 1 µL
- Measuring time: Two seconds
- Measuring range: 1.1-22.2mmol/L (20-400mg/dL)
- Memory capacity: 250 test results
- Average results: 7days, 14days, 28days
- Hematocrit Range: 30%-60%
- 1 Button cell

QTN: 20PCS/CTN
G.W./N.W.: 3.6PCS/18kg
Size: 57*24*18.5cm
Weight: 18g

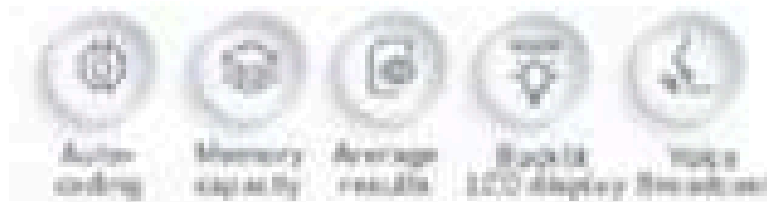


- Enzyme: GOD
- Strip test button
- Unit: mg/dL or mmol/L
- Blood volume: 1 µL
- Measuring time: 8 seconds
- Measurement range: 1.1-22.2mmol/L (20-400mg/dL)
- Memory capacity: 250 groups
- Average results: 7days, 14days, 1 month, 2 months and 3 months
- Operation temperature: 10°C-40°C
- Hematocrit range: 30%-60%
- 2 AAA batteries

QTN: 20PCS/CTN
G.W./N.W.: 4.3PCS/18kg
Size: 57*24*18.5cm
Weight: 19g




- Enzyme: GOD
- Strip test button
- Unit: mg/dL or mmol/L
- Blood volume: 1 µL
- Measuring time: 8 seconds
- Measuring range: 1.1-22.2mmol/L (20-400mg/dL)
- Memory capacity: 250 groups
- Average results: 7days, 14days, 1 month, 2 months and 3 months
- Operation temperature: 10°C-40°C
- Hematocrit range: 30%-60%
- 2 AAA batteries

Optional function

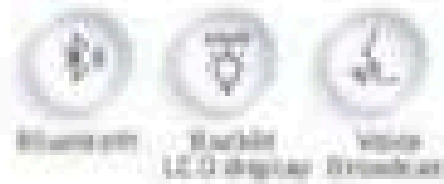

QTN: 20PCS/CTN
G.W./N.W.: 5.2PCS/18kg
Size: 57*24*18.5cm
Weight: 18g



- Enzyme: GOD
- Measuring unit: mg/dL or mmol/L
- Blood volume: 1 µL
- Measuring time: Six seconds
- Measurement range: 1.1-22.2mmol/L (20-400mg/dL)
- Memory capacity: 250 groups
- Average results: 7 days, 14 days, 1 month, 2 months and 3 months
- Power: use 2.0V lithium button cell
- More function: Bluetooth for most function

QTN: 20PCS/CTN
G.W./N.W.: 4.3PCS/18kg
Size: 57*24*18.5cm
Weight: 19g



- Input power: DC 3.0V [two "AA" 1.5V alkaline batteries]
- Operation noise: approx. <50dB(A)
- MMD: 3.49μm
- Max nebulizing rate: ≥0.2mL/min
- Residual quantity: < 0.25mL
- Mask: Polypropylene, non plasticizer

QTN: 10PCS/CTN
G.W.: 4.7kgs
Size: 40.5×33.5×17cm



- Power: AC100-240V, 50/60Hz
- Ultrasonic frequency: 1.7MHz± 10%
- Input power: < 70VA
- MMD: 3.9μm
- Maximum nebulizing rate: ≥ 3mL/min
- Timing range 0-60 min
- Continuous loading time: ≥ 4h
- Fill volume of medicine cup: 30mL
- Fill volume of water container: 130mL

QTN: 4PCS/CTN
G.W.: 5.3kgs
Size: 65.5×25×23.5cm



- Input power: DC 3.0V [two "AA" 1.5V alkaline batteries]
- Operation noise: approx. <50dB(A)
- MMD: 3.49μm
- Max nebulizing rate: ≥0.2mL/min
- Residual quantity: < 0.25mL
- Mask: Polypropylene, non plasticizer

QTN: 10PCS/CTN
G.W./N.W.: 4.7/0.97kgs
Size: 40.5×33.5×17cm



- Power supply: AC 110-220V, 50/60Hz
- Ultrasonic frequency: 1.7MHz ± 10%
- Input power: 50VA
- MMD: 3.9μm
- Maximum nebulizing rate: ≥ 3mL/min
- Timing range: 0-60min
- Continuous loading time: ≥ 4h
- Fill volume of medicine cup: 150mL
- Fill volume of water container: 350mL

QTN: 2PCS/CTN
G.W./N.W.: 4/3.5kgs
Size: 41.5×30×26.5cm

PORTABLE PHLEGM SUCTION UNIT



- Input power: 90VA
- Max Vacuum: $\geq 0.08\text{MPa}$
- Max Air Flow: $28\pm 2\text{ L/min}$ (without jar); $22\pm 2\text{ L/min}$ (with jar)
- Operation noise: approx. 50dB(A) (without vacuum)
- Liquid Collection Jar: 1000mL, 1piece
- Operating time: 30 minutes on, 30 minutes off

- Power supply: AC 220V, 50Hz
- Input power: 150VA
- Max vacuum: $\geq 0.08\text{Mpa}$
- Max air flow: $\geq 20\text{ L/min}$ (with jar); $32\pm 2\text{ L/min}$ (with jar)
- Operation noise: approx. 50dB(A) (without vacuum)
- Power: $\leq 150\text{VA}$
- Liquid collection jar: 1000mL/pc
- Operating time: 30 minutes on, 30 minutes off

QTN: 4PCS/CTN
G.W./N.W.: 20.9/15.6kgs
Size: 60*42*31cm




SUCTION LINER



- DC power supply: AC 100-240V, 50/60Hz or DC 12V
- Input power: 90VA
- Max Vacuum: $\geq 0.08\text{MPa}$
- Air Flow Rate: $\geq 25\pm 2\text{ L/min}$ (with jar)
- Operation noise: approx. 50dB(A) (without vacuum)
- Operating time: 30 minutes on, 30 minutes off
- Running time of battery operation: Approx. 60 minutes



CORE TECHNOLOGY

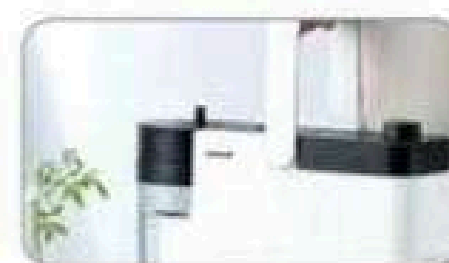


Lightweight



High pressure




Adjustable

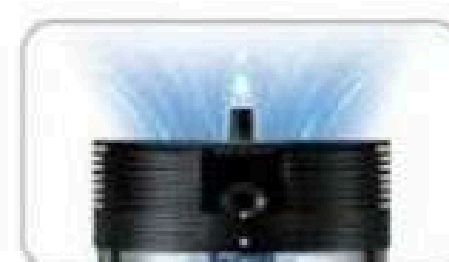

High efficiency



Double mute

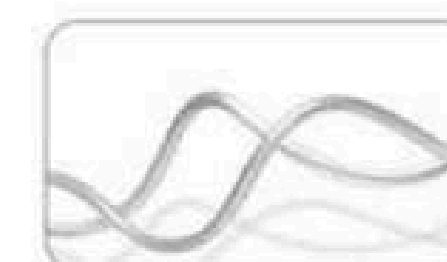

Medical standards



- Input power: 90VA
- Max Vacuum: $\geq 0.075\text{MPa}$
- Max Air Flow: $\geq 17\text{ L/min}$ [with jar];
- Operation noise: approx. 50dB(A) [without vacuum][CE]
approx. 57dB(A) [without vacuum][Basic sets]
- Liquid Collection Jar: 1000mL, 1 piece
- Operating time: 30 minutes on, 30 minutes off

QTN: 2PCS/CTN
G.W./N.W.: 10/7.6kgs
Size: 54.5×37×31cm



- DC power supply: AC 100-240V, 50/60Hz or DC 12V
- Input power: 44VA
- Air flow rate: $\geq 15\text{ L/min}$ [with jar]
- Operating time: 30 minutes on, 30 minutes off
- Running time of battery operation: Approx. 30 minutes

QTN: 2PCS/CTN
G.W./N.W.: 14.7/12kgs
Size: 54.5×37×31cm



- Input power: 90VA
- Max Vacuum: $\geq 0.075\text{MPa}$
- Max Air Flow: $\geq 17\text{ L/min}$ [with jar];
- Operation noise: approx. 50dB(A) [without vacuum]
- Liquid Collection Jar: 1000mL, 1 piece
- Operating time: 30 minutes on, 30 minutes off

QTN: 2PCS/CTN
G.W./N.W.: 11/8kgs
Size: 52×46×34.5cm




- DC power supply: AC 100-240V, 50/60Hz or DC 12V
- Input power: 90VA
- Air flow rate: $\geq 17\text{ L/min}$ [with jar]
- Operating time: 30 minutes on, 30 minutes off
- Running time of battery operation: Approx. 30 minutes

QTN: 2PCS/CTN
G.W./N.W.: 14.8/12kgs
Size: 52×46×34.5cm

SUCTION APPARATUS

Electric Suction Apparatus

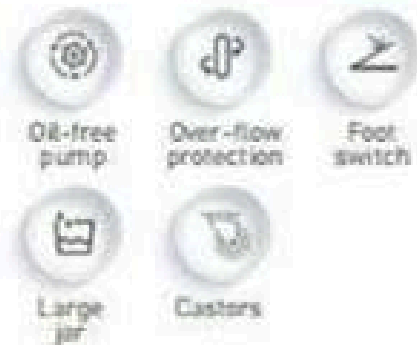

- Power Voltage: AC220V, 50Hz
- Max negative pressure: $> 80\text{kPa}$
- Operation noise: $< 60\text{ dB (A)}$
- Input power: 180VA
- Max air flow: $30\pm 2\text{ L/min}$ (without jar)
 $26\pm 2\text{ L/min}$ (with jar)
- Liquid Collection Jar: 2500 mL/pc, 2 pieces

QTN: 1PCS/CTN
G.W./N.W.: 15.2/13.5kgs
Size: 40.5x40x56cm



CE

Electric Suction Apparatus



- Power voltage: AC220V, 50Hz
- Max negative pressure: $> 80\text{kPa}$
- Operation noise: $< 60\text{ dB (A)}$
- Input power: 180VA
- Max air flow: 20 L/min (with jar)
 40 L/min (with jar)
- Liquid collection jar: 2500 mL/pc, 2 pieces

QTN: 1PCS/CTN
G.W./N.W.: 19.5/17kgs
Size: 44.5x40x86cm



CE

Pedal Suction Apparatus



- Max negative pressure value: $> 0.08\text{MPa}$
- Negative pressure back-reduction while being closed: $< 0.005\text{MPa/10min}$
- Liquid Collection Jar: 1000mL
- Pedal pressure: $< 245\text{ N}$
- Weight: 4.2kg

QTN: 1PCS/CTN
G.W./N.W.: 4.8/3.8kgs
Size: 39.5x27x31.5cm



CE


Smaller, Lighter, and Portable

No power is needed to operate this product, making it an ideal equipment for remote areas, village clinic, home care, and situations where no power is present.



Manual Suction Apparatus

CE



- Max vacuum: $> 0.04\text{MPa}$
- Max flow: $> 20\text{ L/min}$
- Liquid Collection Jar: 200ml
- Weight: 202g


QTN: 5PCS/CTN
G.W.: 2.1/1.1kgs
Size: 31x20x22cm



THERMOMETER



Infrared Thermometer

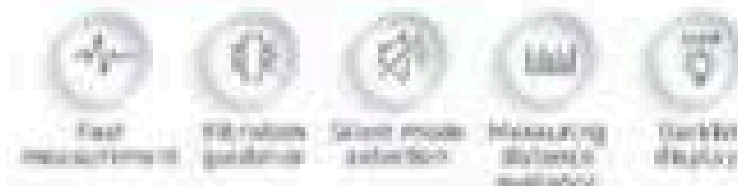


- Measurement range: 32~42°C
- Temperature unit: °C/°F
- Dimension: 145x35x42mm
- Response time: 1 second
- Auto shut off: 30 seconds
- Measuring distance: 5-30cm

QTY: 40PCS/CTN
G.W./N.W.: 8.80kg
Size: 57.5x34x16.5cm




Infrared Thermometer

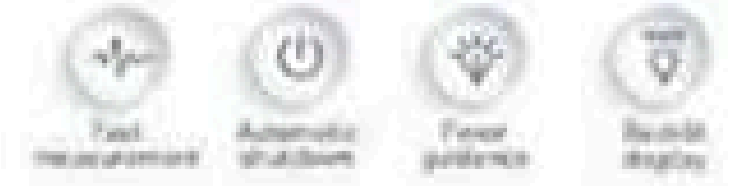

- Body measurement range: 32°C~42°C
- Environment measurement range: 10°C~42°C
- Object measurement range: 0°C~42°C
- Measure distance: 5-30cm
- Temperature unit: °C/°F
- Time interval of each measurement: 1s
- Automatic power off time: 30s/10s
- Measurement distance: 1s
- Memory retrieval: 20 memory groups
- Body temperature/Object temperature/Environment temperature measurement

QTY: 40PCS/CTN
G.W./N.W.: 8.80kg
Size: 57.5x35.5x15.5cm

Infrared Thermometer

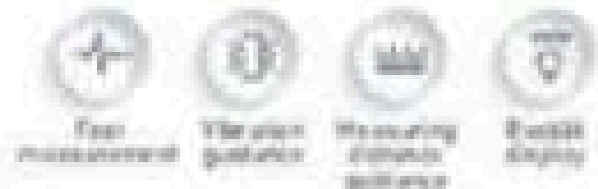


- Measurement range: 32~42°C
- Temperature unit: °C/°F
- Response time: 1 second
- Auto shut off: 30 seconds
- Measure distance: 5-30cm
- Memory retrieval: 10 memory groups

QTY: 40PCS/CTN
G.W./N.W.: 8.80kg
Size: 57.5x34x16.5cm



Infrared Thermometer

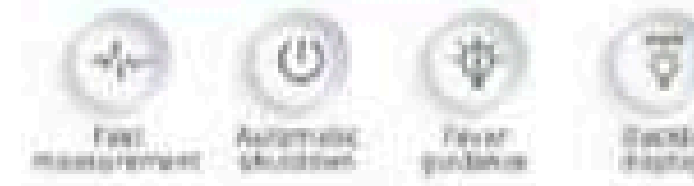

- Body measurement range: 32°C~42°C
- Environment measurement range: 10°C~42°C
- Object measurement range: 0°C~42°C
- Measure distance: 5-30cm
- Time interval of each measurement: 1s
- Automatic power off time: 30s
- Measurement distance: 1s
- Memory retrieval: 12 memory groups
- Body temperature/Object temperature/Environment temperature measurement

QTY: 40PCS/CTN
G.W./N.W.: 11/2kg
Size: 42.5x48x14.5cm





Infrared Thermometer



- Measurement range: 32~43°C
- Temperature unit: °C/°F
- Dimension: 149*38*42mm
- Response time: 1 second
- Auto shut off: 60 seconds
- Measure distance: 0-5cm
- Measuring Color Indicator

QTN: 40PCS/CTN
G.W./N.W.: 5.9/2.4kgs
Size: 57.5*36*16.5cm



Infrared Thermometer



- Measurement range: 32~43°C
- Temperature unit: °C/°F
- Response time: 1 second
- Auto shut off: 60 seconds
- Measure distance: 0-5cm
- human body and object

QTN: 40PCS/CTN
G.W./N.W.: 8.8/3kgs
Size: 57.5*36*16.5cm



Infrared Ear Thermometer



QTN: 40PCS/CTN
G.W./N.W.: 7.1/2.5kgs
Size: 66*26.5*17.5cm



Infrared Ear Thermometer



QTN: 40PCS/CTN
G.W./N.W.: 9.2/2.9kgs
Size: 66*36.5*17.5cm



Infrared Ear Thermometer



- Body measurement range: 34°C~42.2°C
- Temperature unit: °C/°F
- Time interval of each measurement: 12s
- Automatic power off time: 60s±10s
- Measurement duration: <2s
- Number of earmuffs: 20
- Memory retrieval: 10 memory groups

QTN: 40PCS/CTN
G.W./N.W.: 10/3kgs
Size: 67*37.5*26.5cm

Infrared Ear Thermometer



- Body measurement range: 34°C~42.2°C
- Temperature unit: °C/°F
- Time interval of each measurement: 12s
- Automatic power off time: 60s±10s
- Measurement duration: <2s
- Number of earmuffs: 20
- Memory retrieval: 6 memory groups

QTN: 40PCS/CTN
G.W./N.W.: 10/3kgs
Size: 67*37.5*26.5cm



(Oral use & Armpit use)



(Oral use & Armpit use)



*Storage cover

- Power supply voltage: internal power supply equipment, alkaline button battery (LR41, -10%~+5%)
- Temperature sensing part: thermistor
- Body temperature display and resolution: digital display, 0.1°C
- Waterproof rating: IP22
- Battery life: about 1000 times (measured 5-10 minutes/time)
- Measuring range: 32.0°C ~ 42.9°C
- Unit of measurement: Celsius (°C)
- Memory function: memorizes the last measured value
- High temperature reminder: if the measured temperature is higher than 37.8°C, it will send out continuously and quickly "Di-di-di" alarm prompt

QTN: 50PCS/CTN
G.W./N.W.: 4.0/1.1kgs
Size: 45x34x16cm



*Storage cover

- Power supply voltage: internal power supply equipment, alkaline button battery (LR41, -10%~+5%)
- Temperature sensing part: thermistor
- Body temperature display and resolution: digital display, 0.1°C
- Waterproof rating: IP22
- Battery life: about 1000 times (measured 5-10 minutes/time)
- Measuring range: 32.0°C ~ 42.9°C
- Unit of measurement: Celsius (°C)
- Memory function: memorizes the last measured value
- High temperature reminder: if the measured temperature is higher than 37.8°C, it will send out continuously and quickly "Di-di-di" alarm prompt

QTN: 50PCS/CTN
G.W./N.W.: 3.9/1.0kgs
Size: 45x34x16cm

FINGER PULSE OXIMETER



QTN: 40PCS/CTN
G.W./N.W.: 4.1/1.5kgs
Size: 45x26x15cm



- Measurement range of SpO_2 : 70%-100%
- Measurement range of pulse rate: 25bpm-250bpm
- Accuracy of SpO_2 : 70%-100%: $\pm 2\%$
- Accuracy of pulse rate: $\pm 1\%$ / ± 1 bpm (The result depends on the larger value)
- Power consumption: ≤ 40 mA
- Operation environment: Temperature [C]: 5-40
Relative humidity: $\leq 80\%$
- Boot method: Open angle to boot
- Power supply: 2x1.5V AAA alkaline batteries
- Display mode: LED
- Dimension: 60x38x35mm
- Weight: 38g (without batteries)
- Automatic shutdown time: 8s



QTN: 40PCS/CTN
G.W./N.W.: 4.1/1.5kgs
Size: 45x26x15cm



- Measurement range of SpO_2 : 70%-100%
- Measurement range of pulse rate: 25bpm-250bpm
- Accuracy of SpO_2 : 70%-100%: $\pm 2\%$
- Accuracy of pulse rate: $\pm 1\%$ / ± 1 bpm (The result depends on the larger value)
- Power consumption: ≤ 40 mA
- Operation environment: Temperature [C]: 5-40
Relative humidity: $\leq 80\%$
- Boot method: Open angle to boot
- Power supply: 2x1.5V AAA alkaline batteries
- Display mode: LED
- Dimension: 60x38x35mm
- Weight: 38g (without batteries)
- Automatic shutdown time: 8s



- Measurement range of SpO_2 : 70%-100%
- Measurement range of pulse rate: 25bpm-250bpm
- Accuracy of SpO_2 : 70%-100%: $\pm 2\%$
- Accuracy of pulse rate: $\pm 1\%$ / ± 1 bpm (The result depends on the larger value)
- Power consumption: ≤ 40 mA
- Operation environment: Temperature [C]: 5-40
Relative humidity: $\leq 80\%$
- Boot method: Push button to boot
- Power supply: 2x1.5V AAA alkaline batteries
- Dimension: 60x38x35mm
- Weight: 38g (without batteries)
- Automatic shutdown time: 8s



QTN: 40PCS/CTN
G.W./N.W.: 4.1/1.5kgs
Size: 45x26x15cm



- Measurement range of SpO_2 : 70%-100%
- Measurement range of pulse rate: 25bpm-250bpm
- Accuracy of SpO_2 : 70%-100%: $\pm 2\%$
- Accuracy of pulse rate: $\pm 1\%$ / ± 1 bpm (The result depends on the larger value)
- Power consumption: ≤ 30 mA
- Operation environment: Temperature [C]: 5-40
Relative humidity: $\leq 80\%$
- Boot method: Push button to boot
- Power supply: 2x1.5V AAA alkaline batteries
- Display mode: OLED
- Dimension: 66x35x30mm
- Weight: 27g (without batteries)
- Automatic shutdown time: 8s



QTN: 40PCS/CTN
G.W./N.W.: 3.8/1.2kgs
Size: 45x26x15cm

OXYGEN INTAKE DEVICES

Oxygen flow range: 1-15 L/min
High pressure part can support 15MPa when the flow is shut off.
Pressure shall be controlled between 0.2-0.25MPa.
Exhaust pressure at safety valve is 0.35±0.05MPa.
Impurities of oxygen are generally eliminated by special filtration and humidification, making it more comfortable and safe for the patient.

QTN-12PQ/CTN
G.W./N.W.: 1.3/0.8kg
Size: 11.5x4x21.5cm



Input pressure: 0.2-0.25MPa
Flow regulation range: 1-15 L/min
Optional terminal medical connector
The damp bottle can be removed, washed and sterilized, as well as reused.
The scale on the flow meter is easy to read and the display is accurate.
Simplest regulation, easy to adjust the required flow.

QTN-10PQ/CTN
G.W./N.W.: 1.3/0.8kg
Size: 11.5x4x21.5cm

Wall-hung Oxygen Inhalator

Input pressure: 0.2-0.25MPa
Flow regulation range: 1-15 L/min
Optional terminal medical connector
The handling of the flow meter is clear and the display is accurate.
Simplest regulation, easy to adjust the required flow.
The maximum temperature resistance of the damp bottle is 120°C.
Water valve exhaust pressure: 0.35MPa.
The bottle is equipped with PE high-density float element, which can be humidified evenly, filtered and allowed.

QTN-10PQ/CTN
G.W./N.W.: 1.3/0.8kg
Size: 11.5x4x21.5cm



Buoy Type Oxygen Inhalator

QTN-10PQ/CTN
G.W./N.W.: 1.3/0.8kg
Size: 11.5x4x21.5cm



Oxygen Cylinder

QTN-1PQ/CTN
G.W./N.W.: 15/7.5kg
Size: 18x28x11.5cm



Oxygen Cylinder

QTN-1PQ/CTN
G.W./N.W.: 15/7.5kg
Size: 18x28x11.5cm

Wheelchair Series

OXYGEN REGULATORS



- Input: 3000PSI
- Output: 50PSI
- Flux: 12 levels in adjustment
- Inlet connection: CGA-870
- Outlet connection: 1/4" OD hose barb

QTN: 1PCS/CTN
G.W./N.W.: 8.7/7.1kgs
Size: 40x15x35cm
Color can be customized: ■ ■ ■



- Input: 3000PSI
- Output: 50PSI
- Output flux more than 170/min from the
- DISS mouth
- Inlet connection: CGA-870

QTN: 1PCS/CTN
G.W./N.W.: 14.6/13.6kgs
Size: 42.5x32x20.5cm



- Input: 3000PSI
- Output: 50PSI
- Flux: 12 levels in adjustment
- Inlet connection: CGA-870
- Outlet connection:
- 1/4" OD hose barb

QTN: 1PCS/CTN
G.W./N.W.: 14/13kgs
Size: 40x15x35cm



- Input: 3000PSI
- Output: 50PSI
- Flux: 12 levels of adjustment
- Inlet connection: CGA-540
- Outlet connection: 9/16" - 18UNF

QTN: 1PCS/CTN
G.W./N.W.: 9.3/6.7kgs
Size: 29.5x17.5x43.5cm
Color can be customized: ■ ■



- Input: 3000PSI
- Output: 50PSI
- Flux: 12 levels of adjustment
- Inlet connection: CGA-540
- Outlet connection: 9/16" - 18UNF

QTN: 1PCS/CTN
G.W./N.W.: 10.9/8.9kgs
Size: 40x15x35cm
Color can be customized: ■ ■



QTN: 1PCS/CTN
G.W./N.W.: 16/15kgs
Size: 40x15x35cm



QTN: 1PCS/CTN
G.W./N.W.: 7.2/5.5kgs
Size: 29.5x17.5x43.5cm
Color can be customized: ■ ■



Thicken the Tube Wall



Aluminum Drop Back Handle

Fixed PU armrest and footrest. Aluminum drop back handle. Reticulated and breathable cushion. 6" PU front wheel and 12" PU rear wheel. With hand brake.




Brake Dust Cover



Fashion Foot-tape Design

Fixed PU armrest and footrest. Reticulated and breathable cushion. 6" front wheel and 22" rear wheel with solid tire. With hand brake.



Detachable and changeable soft seat.



折叠机构:
Foldable backrest: Save room and can put in car boot.

(Fashionable, Dynamic, Light weight, For high quality of life)
Description: Fixed armrest, Fixed footrest, Drop down handle, 6" PVC front wheel, 22" PU rear wheel, Aluminum footplate, Detachable soft seat, With hand brake, Pneumatic tires available.



Fixed armrest and footrest. Chrome-covered frame, PVC cushion. 8" Front wheel and 24" rear wheel.



New designed brake convenient and safe.



Wide front wheel.



Detachable and changeable soft seat.



Fixed armrests, fixed footrest, Chrome-covered frame, PVC back cushion, 8-inch front wheels, 24-inch steel wire rear wheels seat width: 20-inch.



Fixed armrest and footrest. Chrome-covered frame, Nylon cushion. 8" Front wheel and 24" mag wheel.



Fixed armrest and footrest. Painted frame. Nylon cushion. 8" Front wheel and 22" rear wheel.



Detachable long armrests, height adjustable and detachable footrest. Retroverted high backrest. Seat with commode. Chrome-covered frame. 8" PVC front wheel, 24" steel rear wheel.
可拆长扶手, 可拆式升降脚, 高靠背, 车架电镀, PVC 座便式坐垫, 可卸下 8" PVC 前轮, 24" 钢丝后轮。



STEEL WHEELCHAIR, detachable backrest & footrest, 8" front castor, 22" rear wheel.



Detachable long armrests, detachable lift-able feet, high backrest, spraying shell, PVC cushion for seat, can be discharged, 8" front wheel, 24" steel rear wheel.

■ Multifunctional rehabilitation products



Flip up armrest and detachable footrest,Chrome-covered frame,Seat with commode,PVC cushion,8"Front wheel and 24" rear wheel.



Flip up armrest and detachable footrest,Chrome-covered frame,Seat with commode,PVC cushion,8"Front wheel and 24" rear wheel.



Fixed armrest and footrest,Chrome-covered frame, PVC cushion,8"Front wheel and 24"rear wheel.




● Lifting Aid



● Walker



● Shower Chair

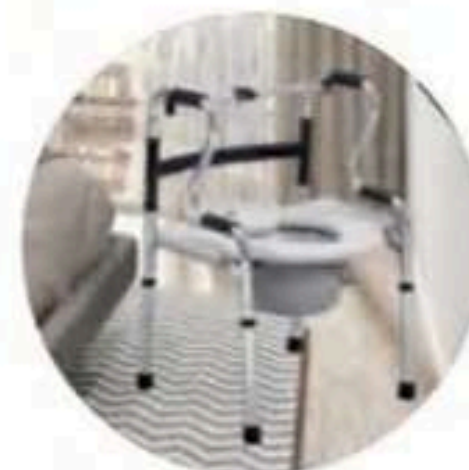

● Commode Chair



● Toilet Safety Frame



● Toilet Seat Raiser



Asian Style



5" PVC wheels,when use will be more flexible



Tube diameter 25mm, tube wall thickness 1.2mm



Plastic backplane, easy to wash without possession of pollution.will be more comfortable



European Style



Widening "H" tube, more fashionable, more stable.



5" PVC wheels,when use will be more flexible



Tube diameter 25mm, tube wall thickness 1.2mm



AS SHOWER CHAIR

- The shower head can be placed on the clip during bathing.
- The cane can be inserted into clip, and can be taken out to assist in standing.



AS COMMODE CHAIR

- Seat cover can be hung on the hook to prevent loss.
- Put the paper and towel on the hook for easy use.
把纸巾或者手巾挂在挂钩上, 方便使用.



AS TOILET SEAT

- Hang the seat cover on the hook, and take the bucket away to use as toilet chair.
- The user can support the product armrest to stand up.
- Adjust the height of the product and use it as a toilet seat raiser.



Rollator series



Aluminum Rollator
铝合金轻便型手推车

- Aluminum liquid coated frame/ 铝合金喷涂车架
- Detachable contoured padded backrest, add comfort and lumbar support / 加厚软坐垫
- Easily squeeze and release hand brakes come with locking mechanism / 易挤压和释放带锁刹车
- Padded PVC soft seat/ 加厚 PVC 软坐垫
- Optional shopping bag and basket/ 可旋转购物袋和铁丝篮
- With 8" wheels/ 带 8 寸轮



Aluminum Rollator
铝合金轻便型手推车

- Aluminum liquid coated frame/ 铝合金喷涂车架
- Detachable contoured padded backrest, add comfort and lumbar support / 加厚软坐垫
- Easily squeeze and release hand brakes come with locking mechanism / 易挤压和释放带锁刹车
- Padded PVC soft seat/ 加厚 PVC 软坐垫
- Optional shopping bag and basket/ 可旋转购物袋和铁丝篮
- With 6" wheels/ 带 6 寸轮

Walker Series



Walking Stick Series



Fixed sleeve and belt series





■ Waistline series



■ Medical sling traction belt series






■ Traction belt series




■ Traction belt series

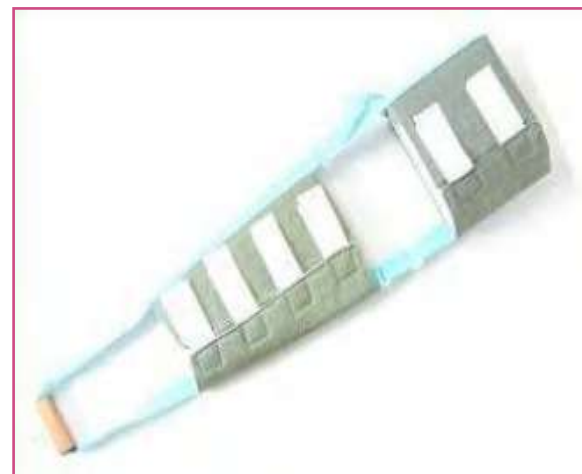

■ Abdominal belt series



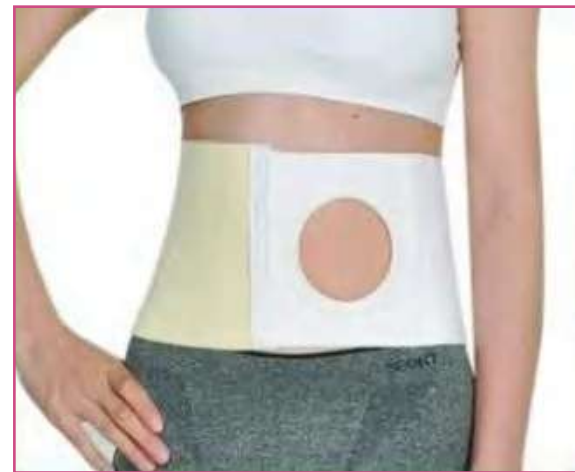

■ Fixed sleeve and belt series





First aid kit



- Medical tape 2.5cm(1")
- Adhesive plaster 76 x 25mm (3"x 1")
- Adhesive plaster finger strip 120 x 20mm
- Adhesive plaster 76 x 19mm (3" x 3/4")
- Adhesive plaster 10cm x 6cm (4 "x 2.4")
- Butterfly fingertip adhesive plaster 76 x 45mm
- First aid dressing bandages 8 x 10cm
- First aid dressing bandages 10 x 12cm
- Sterile burn dressing 40 x 60cm
- Exam gloves
- Emergency blanket 210 x 160cm silver/gold
- Cleansing wet wipes 20x12cm
- Scissor 13cm
- First aid kit manual
- Nylon bag 18 x 12.5 x 5cm(7"x 5" x2")
- PP box 19 x 13.5 x 5.5cm(7.5" x5.3" x2.1")



- Medical tape 2.5cm(1")
- Adhesive plaster 10cm x 6cm (4 "x2.4")
- Butterfly fingertip adhesive plaster 76 x 45mm
- Knuckle adhesive plaster 76 x 38mm
- Adhesive plaster 76 x 25mm (3" x 1")
- Adhesive plaster finger strip 120 x 20mm
- First aid dressing bandages, 6 x 8cm
- First aid dressing bandages, 8 x 10cm
- First aid dressing bandages, 10x 12cm
- Sterile burn dressing 40 x 60cm
- Sterile burn dressing 60 x 80cm
- Exam gloves
- Conforming elastic bandage 6cm x 4m
- Conforming elastic bandage 6cm x 8m
- Emergency blanket, 210 x 160cm silver/gold
- Sterile wound dressing 10x 10cm (4"x4"), pack of 2
- Triangular bandage
- Stainless steel scissors 15cm
- Cleansing wet wipes
- First aid manual
- Nylon bag 25x 13 x6.5cm(10"x5.1"x2.6")
- PP box 26x 17 x8cm(10.2" x 6.7" x3")



- Medical tape 2.5cm(1")
- Adhesive plaster 10cm x 6cm (4 "x 2.4")
- Butterfly fingertip adhesive plaster 76x 45mm
- Knuckle adhesive plaster 76 x 38mm
- Adhesive plaster 76 x 25mm (3" x 1")
- Adhesive plaster finger strip 120 x 20mm
- First aid dressing bandages, 6 x 8cm
- First aid dressing bandages, 8 x 10cm
- First aid dressing bandages, 10 x 12cm
- Sterile burn dressing 40 x 60cm
- Sterile burn dressing 60 x 80cm
- Exam gloves
- Conforming elastic bandage 6cm x 4m
- Conforming elastic bandage 6cm x 8m
- Emergency blanket, 210 x 160cm silver/gold
- Sterile wound dressing 10 x 10cm (4"x4"), pack of 2
- Triangular bandage
- Stainless steel scissors 15cm
- Cleansing wet wipes
- Reflective warning triangle 41cm
- Reflective vest
- First aid manual
- First aid bag 25 x 13 x 6.5cm(10" x 5.1" x 2.6")



- Adhesive plaster 10cm x 6cm (4 "x 2.4")
- Knuckle adhesive plaster 76 x 38mm
- Adhesive plaster finger strip 120 x 20mm
- Adhesive plaster 76 x 19mm (3" x 3/4")
- Adhesive plaster 76 x 25mm (3" x 1")
- Medical tape 2.5cm(1")
- First aid dressing bandages, 6 x 8cm
- First aid dressing bandages, 8 x 10cm
- First aid dressing bandages, 10 x 12cm
- Sterile burn dressing 60 x 80cm
- Sterile wound dressing 10 x 10cm (4" x 4"), pack of 1
- Sterile eye pad
- Instant cold pack
- Emergency blanket, 210 x 160cm silver/gold
- Conforming elastic bandage 6cm x 4m
- Conforming elastic bandage 8cm x 4m
- Triangular bandage
- Stainless steel scissors 15cm
- CPR face mask
- Exam gloves
- Garbage plastic bag
- Broschure
- First aid manual
- ABS box 33.5 x 24.5 x 12.5cm(13" x 9.5" x 5")

- Medical tape 2.5cm(1")
- Elbow/knee adhesive plaster 50 x 100mm
- Knuckle adhesive plaster 76 x 38mm
- Adhesive plaster finger strip 120 x 20mm
- Adhesive plaster 76 x 19mm (3" x 3/4")
- Adhesive plaster 76 x 25mm (3" x 1")
- First aid dressing bandages, 6 x 8cm
- First aid dressing bandages, 8 x 10cm
- First aid dressing bandages, 10 x 12cm
- Sterile burn dressing 60 x 80cm
- Sterile wound dressing 10 x 10cm (4" x 4")
- Sterile eye pad
- Instant cold pack
- Conforming elastic bandage 6cm x 4m
- Conforming elastic bandage 8cm x 4m
- Triangular bandage
- Trauma shears 15cm (6")
- CPR face mask
- Exam gloves
- Emergency blanket, 210 x 160cm silver/gold
- Garbage plastic bag
- Content list
- First aid manual
- PP box 27 x 26 x 9cm (10.6" x 10.2" x 3.5"),
- ABS box 29 x 20 x 12cm(11.4" x 7.8" x 4.7")



- Adhesive plaster finger strip 120 x 20mm
- Spot adhesive plaster 22mm (7/8")
- Alcohol prep pads
- Antiseptic cleansing wipes
- Sting relief pads
- Conforming elastic bandage 8cm x 4m
- Medical tape 1.25cm(1/2")
- Triangular bandage 96 x 96 x 136cm
- Cotton tip applicator
- Safety pins 3.8cm
- Metal tweezers 12.5cm
- Scissors 15cm
- Emergency towel
- Whistle
- Swiss card
- Hand driven flash light
- Emergency blanket, 210 x 130cm silver/silver
- First aid bag 20 x 13 x 5cm (7.9" x 5.1" x 2")